



November 30, 2011

---

Knowledge Base Topic:

## Fix for Earthwork volumes shift in XSections

---

Software: Civil 3D 2012


Earth work quantities on the x-section sheets are been displayed with an incorrect offset, even the settings are right (2.4). I have been able to trick it sometimes changing the 2.4 for 2.401, and it plots right if you keep the file open, but once you close it and plots from SSO then the error comes back.

Possible Solution:

*Open file (rdxsrd01)*

*Go to the settings tab on toolspace*

*Go to Section View>Group Plot Styles >FDOT Group Plot Style*

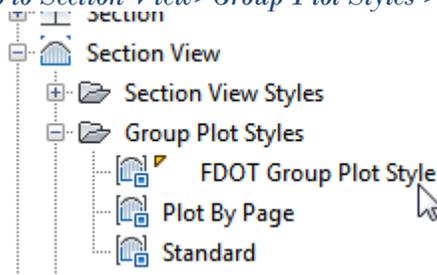

*Right click and select edit*

*Click apply*

*Check if the tables moved to the correct location*

*Select OK*

*Save file and close*

*Open file and see if the tables stayed in the correct location.*