




[contact us](#) | [what's new](#) | [FAQ's](#) | [links](#)

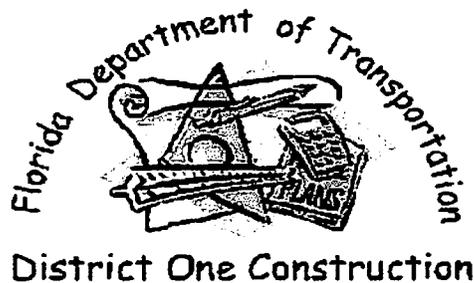

Proposal Number: T1467
Financial Project Number: 413042-3-52-01

Question	Response
<p>Plan Sheet B1-27, Casting Sequence Note #8, referring to the Casting Sequence Plan, Sections 3 and 6 states that these units are optional and may be poured with the Approach Slab. This does not make sense. If these transverse closure sections are optional it would follow that they can be omitted and the deck poured in the same manner as the Plans show for the Bridge over Alligator Creek, Sheet # B2-20. Please clarify.</p>	<p>Answer Posted on 6/16/2011 @ 1:03PM: The transverse closure pours are optional and can be omitted. The deck can be poured in the same manner as the bridge over Alligator Creek.</p>

[Return to Bid Questions](#)

[Print Page](#)

This site is maintained and published by the Florida Department of Transportation's District One Construction Office, located at 801 N Broadway, Bartow, FL 33830. (863) 519-2550

[Site Contact Information](#)

[Back to the State Construction Office](#)