Florida Department of Transportation

RICK SCOTT
GOVERNOR

1074 Hwy 90
Chipley, Florida 32428

JIM BOXOLD
SECRETARY

March 9, 2016

ADDENDUM NO. 1

To: ALL PROPOSAL HOLDERS
FINANCIAL ITEM NUMBER: 42212217248
CONTRACT NUMBER: E3P67
DESCRIPTION: The improvements under this District Contract consist of SR 77 Landscaping Renovation & Maintenance in Washington County

BIDS TO BE RECEIVED: ~~March 10, 2016~~ March 17, 2016

If you are a PROPOSAL HOLDER, this is your authorization to make the following changes to the plans and specification packages you now have for the subject project:

- **The letting for this project has been moved from March 10, 2016 to March 17, 2016**
- **The attached language and drawing for page 31 of the specifications package has been revised.**

Please use this revision when preparing your bid.

Sealed bids will be received until 2:00 p.m. local time on March 17, 2016 in the District Three Procurement Services Conference Room, Room 230, Administration Building, 1074 Highway 90, Chipley, Florida.

AMENDMENT NOTIFICATION

If you are a PROPOSAL HOLDER, please go to the District Three Contracts Administration Addenda Website at http://www.dot.state.fl.us/contractsadministrationdistrict3/ to download Amendment No. 1, file E3P67.001.

Also all PROPOSAL HOLDERS please acknowledge receipt of the addendum under the Acknowledgement of Amendments tab on your electronic bid.

If you have any further questions please contact Amanda Mauldin by phone at (850) 330-1364 or by email at amanda.mauldin@dot.state.fl.us.

Sincerely,

Steve Thames
District Contracts Administrator
ST:am

c.c. Mark Thomas, Heath Riley, Renae Sanders, Hal Gore, file

Addendum Number 1

March 9, 2016

TO THE: Specifications Package

FOR: State Road 77 Landscaping Renovation & Maintenance in Washington County
Financial Project No. 422122-1-72-48
Contract No.: E3P67

Page No. 31 of the specifications package is revised as follows:

Insert the following paragraph after the 2nd paragraph of Subarticle **580-3.8 Irrigation**:

The existing irrigation system along State Road 77 is presently fed by two different sources. The portion south of Interstate 10 is supported by a well located within the adjacent Blue Lake Park that also services the park bathrooms, while the northern segment of the irrigation system is fed by the City of Chipley municipal water supply. A design-build contract (FP ID: 217909-8-52-01, State Road 77 from south of Clayton Road to north of Blue Lake Road) is presently underway and has the potential to affect the southern portion of the irrigation system due to subsoil excavation that will be performed to a point just south of Blue Lake Road. More specifically, future subsoil excavation has a high likelihood of impacting the existing 4-inch HDPE casing that runs transverse to State Road 77 and supplies water from the park well to the median (approximate STA 105+00 on the supplied informational irrigation plan sheets). In order to avoid conflicts between this landscaping contract and the adjacent design-build project it will be necessary for the landscape contractor to reroute the water supply line for the southern portion of the irrigation system. Splice into the existing water line service from the park well and install a new irrigation line along the east side of State Road 77 that is placed as close as possible to the western edge of the existing concrete ditch pavement. As part of the work associated with splicing into the existing well service also cap the water line extending into the median (approximate STA 105+00 on the supplied informational irrigation plan sheets). At a point south of Blue Lake Road extend the new water line service via directional bore to the southern tip of the first median where landscape work begins (approximate STA 107+80 on the supplied informational irrigation plan sheets). This directional bore shall install a 4-inch HDPE casing under northbound State Road 77/Blue Lake Road. All water lines and any necessary casings shall be installed to a minimum depth of 36 inches. In order to provide for future connectivity to the 2 southern medians excluded from this contract without disturbance to new landscaping installed as part of this work install a valve box near STA 107+80 of sufficient size to house the following items: northern ends of the existing 2-inch and 4-inch HDPE casings that run parallel to State

Road 77; the end of the new casing/water line under northbound State Road 77/Blue Lake Road (installed via directional bore); a valve; and a water line extending northward into the median to supply water to the irrigation system components located south of Interstate 10. A graphical representation of the required new water line alignment is also supplied, and adjustments to the general alignment detailed herein will be permitted with approval of the Engineer. All work shall be performed within the existing right-of-way.

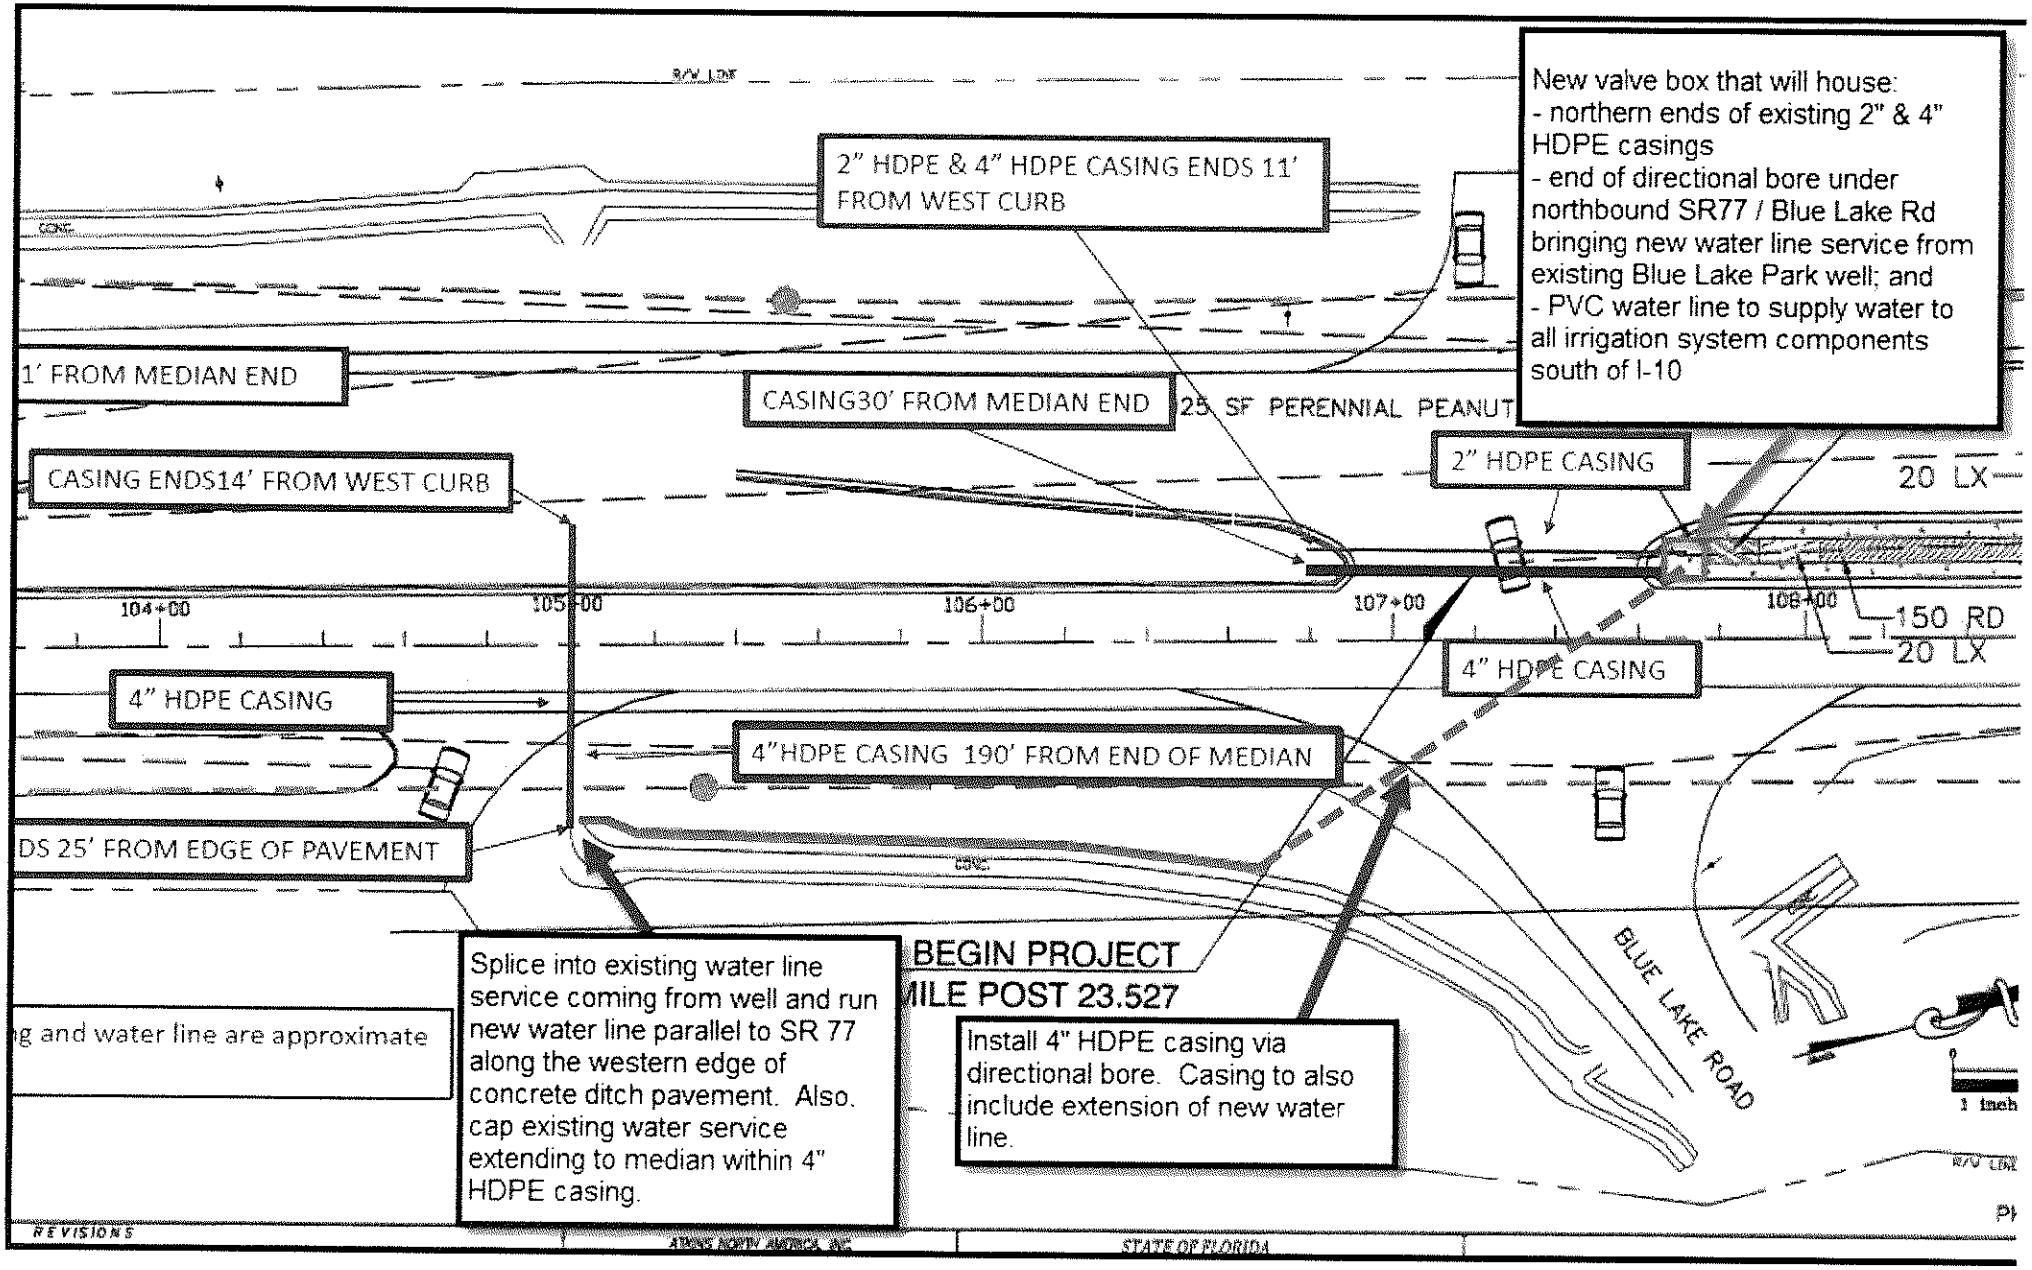
New valve box that will house:
- northern ends of existing 2" & 4" HDPE casings
- end of directional bore under northbound SR77 / Blue Lake Rd bringing new water line service from existing Blue Lake Park well; and
- PVC water line to supply water to all irrigation system components south of I-10
2" HDPE & 4" HDPE CASING ENDS 11' FROM WEST CURB
1' FROM MEDIAN END
CASING30' FROM MEDIAN END
25 SF PERENNIAL PEANUT
2" HDPE CASING
CASING ENDS14' FROM WEST CURB
20 LX
104+00
105+00
106+00
107+00
108+00
150 RD
20 LX
4" HDPE CASING
4" HDPE CASING
4"HDPE CASING 190' FROM END OF MEDIAN
DS 25' FROM EDGE OF PAVEMENT
BEGIN PROJECT
MILE POST 23.527
g and water line are approximate
Splice into existing water line service coming from well and run new water line parallel to SR 77 along the western edge of concrete ditch pavement. Also, cap existing water service extending to median within 4" HDPE casing.
Install 4" HDPE casing via directional bore. Casing to also include extension of new water line.
BLUE LAKE ROAD
1 inch
REVISIONS
STATE OF FLORIDA