

January 28, 2015

ADDENDUM NUMBER 1

TO: All Plans Holders

PROJECT NAME: Mowing, Litter Removal, and Edging and Sweeping

FINANCIAL PROJECT NUMBER: 416021-3-72-14

DISTRICT CONTRACT NO: E7K57-R0

COUNTIES: Pasco


DATE OF LETTING: February 11, 2015 @ 2:30 p.m.

A Pre-Bid Meeting was held for this project under its previous project number E7K20-R0. The attached sheet contains information that was discussed and/or clarified at the meeting and will still apply under E7K57-R0.

An amendment file has been placed on the Website and CPP to modify the bid document.

PLEASE ACKNOWLEDGE RECEIPT OF THIS ADDENDUM WHEN SUBMITTING YOUR BID. FAILURE TO ACKNOWLEDGE THE ADDENDUM MAY RESULT IN YOUR BEING DECLARED NON-RESPONSIVE.

Approved by

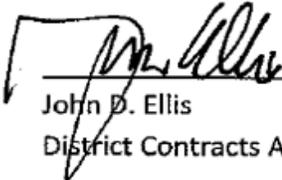

John D. Ellis
District Contracts Administrator

CONTRACT E7K20-R0 E7K57-R0
FINANCIAL PROJECT ID(S). 416021-3-72-14
Mowing, litter removal, and edging and sweeping
Points of Discussion

- The Contractor will be allowed fourteen (14) calendar days from receipt of the initial Work Document to respond and begin work.
- If the Contractor does not begin work by the end of the day specified in the Work Document, or if work on the Work Document is not complete within the number of days stipulated on the Work Document, the Department will assess the Contractor, liquidated damages.
- Specification package indicates a 28 calendar day cycle, however, an addendum is being processed to change this to 25 calendar days.
- Upon completion of the assigned work, notify the Inspector.
- Should inclement weather limit or stop the work, immediately notify the Engineer of work stoppage.
- Schedule work in a manner that prevents delays, stoppages and rework.
- Clearly and legibly identify the owner of all equipment on the Department's right-of-way.
- With the Engineer's acceptance of the request, the contractor may sublet a portion of the work, but shall perform with his own organization work amounting to not less than 40% of the Contact amount.
- Submit the invoice no more often than once every 28 days to the Engineer in charge of the project. Emailed packages are fine but original must still be submitted to Brooksville.
- Work documents are typically be issued via email.
- The Contractor is not required to remove grass or other vegetation cuttings from the right-of-way, from areas of large machine mowing, UNLESS the area contains a pedestrian feature such as a multi-use path. Any areas where pedestrian features are located (urban or rural) must be swept or blown free of clippings the same day as they are cut. In areas of Small, Intermediate, or Large Machine Mowing the cuttings will need to be removed from sidewalks, curb & gutter, gutter, and inlets by the Contractor. The use of blowers (away from traffic) will be allowed to remove the cuttings. However, blowers will not be permitted when performing Edging and Sweeping operations.
- The approximate number of cycles for each type of mowing will be as follows:


Large Machine Mowing	8 cycles (6 <u>minimum</u> cycles)
Slope Mowing	8 cycles (6 <u>minimum</u> cycles)
Intermediate Machine Mowing	8 cycles (6 <u>minimum</u> cycles)
Small Machine Mowing	8 cycles (6 <u>minimum</u> cycles) NOTE** the number of cycles may be dependent upon the speed at which the Contractor completes the work.
- Equip all mowing equipment with a slow moving vehicle sign located on the rear of the tractor, amber flashing light or white strobe light mounted on the tractor, 18 inch X 18 inch fluorescent orange warning flags mounted on each side of the rear of the mower, protective devices on the mower to prevent objects from being thrown into traffic, and safety devices installed by the manufacturer. Properly install and maintain safety devices at all times when the equipment is in use. Equipment lacking any of these features will be placed out of service by the inspector until which time they are compliant. The Department will not grant additional cycle days due to equipment not being compliant with safety equipment.
- Cutting height in rural areas is no more than 6 inches, urban curb and gutter areas require a 4 inch mowing height.
- Mow shoulders and medians concurrently within the limits of the area mowed so that not more than one mile will be left partially mowed at the conclusion of the working day. Mow grass and vegetation on slopes or around appurtenances concurrent with the mowing operation.
- Negligence that results in damage to turf, curbs, sidewalks, pavement, signs or structures, mail boxes, appurtenances, etc. will be repaired or replaced to the satisfaction of the Engineer at no additional cost to the Department. Complete repairs prior to submission of the invoice for work accomplished during the cycle.
- Workmen will wear orange clothing of high visibility such as a vest, shirt, or jacket, at all times when working within the State R/W.
- Storage or stockpiling of litter or debris on the right-of-way will not be permitted. Provide the landfill receipts with each invoice submittal. Provide locations for disposal and remove all litter that has been placed in trash bags for pick up from the right-of-way at the end of each working day
- Edge, sweep, remove and dispose of vegetation from curb and gutter and sidewalk areas including, but not limited to, median island curbs, roadside curbs, the front and/or backside of sidewalks and gutters, bike paths, curb inlets throats.
- Edging – The blade of the edger must produce a clear sharp cut. Weedeaters may not be used in the edging operation.
- Do not use blowers in the edging, sweeping or debris removal operation. When mowing and edging and sweeping cycles run concurrently, it is recommended to let the mowing operation be a few days of the edging and sweeping operation, if blowers are used to blow mowed clippings, as they will not be permitted in the edging and sweeping operation. Sweeping operation shall be by mechanical or hand labor means, no blowing.
- Complete all required edging, sweeping, and disposal of debris within the limits worked by the conclusion of each workday. Edged debris cannot be left overnight.
- Construction quantities will be removed for active construction zones. Presently one active zone on State Road 52 from approximately Old Pasco Road to One Pasco Center. 3 other projects are scheduled to be let on SR 52 in 2015, 2016 and 2017. Construction quantity reduction may be spent on additional cycles of litter, mowing or edging and sweeping if the Contractor is agreeable.

PROJECT SCHEDULING AND MANAGEMENT
DISTRICT 07 UTILITY CHECKLIST
FOR COUNTY: PASCO

ITEM-SEG	DESCRIPTION	UTILITIES CERTIFIED	PRODUCTION	LETTING
431243-1	US98/US301/GALL BLVD FROM N OF KOSSIK RD TO S OF BOUGAINVILLEA AVE RESURFACING ROADWAY ID: 14050000 BEGPT: 7.882 END PT: 13.493 PM: PRD-EAM	05/13/14A	04/02/14A	06/18/14A
430898-1	SR 56 FROM W OF I-75 TO CR 581/BRUCE B DOWNS RESURFACING ROADWAY ID: 14091000 BEGPT: 1.456 END PT: 3.698 PM: PRD-EES-AIM	02/24/14A	03/13/14A	07/30/14A
434765-1	SR 56 FROM MEADOW POINTE BLVD TO US 301 NEW ROAD CONSTRUCTION ROADWAY ID: 14091000 BEGPT: 7.493 END PT: 14.263 PM: PRD-CFB-HEI			10/20/14A
429028-1	SR 54 FROM E OF LAKE CRYSTAL BL TO W OF FLINT ST RESURFACING ROADWAY ID: 14090000 BEGPT: 16.412 END PT: 19.008 PM: PRD-CXI	01/02/15	01/16/15	02/25/15
429076-1	SR 52 FROM E OF SMITH RD TO W OF CENTER AVE RESURFACING ROADWAY ID: 14120000 BEGPT: 30.052 END PT: 32.188 PM: PRD-PMC-BES	11/03/14	12/31/14	03/25/15
431315-1	SR 52 FROM US 19/SR 55 TO E OF INDIAN DR RESURFACING ROADWAY ID: 14120000 BEGPT: .000 END PT: 3.149 PM: PRD-CXI	04/27/15	04/28/15	08/31/15
430802-2	BRIDGE PAINTING PASCO COUNTY VARIOUS LOCATIONS BRIDGE - PAINTING ROADWAY ID: 14070000 BEGPT: 1.589 END PT: 1.627 PM: PRD-BCP		06/25/15	10/28/15
430710-1	SR 54 FROM E OF HUNT RD TO W OF US 41/SR 45 RAILROAD CROSSING ROADWAY ID: 14571000 BEGPT: 8.185 END PT: 8.278 PM: PRD-TRO		08/28/15	01/05/16
256243-2	SR 52 (SCHRADER HWY) FROM CR 581 (BELLAMY BRO) TO EAST OF OLD PASCO RD ADD LANES & RECONSTRUCT ROADWAY ID: 14120000 BEGPT: 21.359 END PT: 22.867 PM: PRD-TAD-	09/08/15	09/22/15	02/17/16
433760-1	US 301 (SR39) FROM N OF GEIGER ROAD TO N OF KOSSIK ROAD RESURFACING ROADWAY ID: 14050000 BEGPT: 5.951 END PT: 7.869 PM: PRD-EAM	10/14/15	10/28/15	04/19/16
416561-2	SR 54 FROM CR 577/CURLEY RD TO CR 579/MORRIS BRDG RD ADD LANES & REHABILITATE PVMNT ROADWAY ID: 14090000 BEGPT: 11.879 END PT: 16.388 PM: PRD-PMC-AMC	07/30/15	12/28/15	05/02/16
411014-4	I-75 (SR 93) FROM N OF SR 52 TO PASCO/HERNANDO CO/L LANDSCAPING ROADWAY ID: 14140000 BEGPT: 12.558 END PT: 20.352 PM: PRD-CXI	07/21/15	11/05/15	07/19/16

PROJECT SCHEDULING AND MANAGEMENT
DISTRICT 07 UTILITY CHECKLIST
FOR COUNTY: PASCO

ITEM-SEG	DESCRIPTION	UTILITIES CERTIFIED	PRODUCTION	LETTING
432583-1	SR 52 FROM E OF EHREN CUTOFF TO W OF BELLAMY BRO BLVD RESURFACING ROADWAY ID: 14120000 BEGPT: 18.077 END PT: 21.026 PM: PRD-CFB-PDG	12/03/15	12/17/15	09/21/16
435894-1	SR 575 OVER WITHLACOCHEE RIVER BRIDGE #140031 BRIDGE-REPAIR/REHABILITATION ROADWAY ID: 14150000 BEGPT: 2.019 END PT: 2.066 PM: PRD-BCP		01/19/17	07/05/17
436490-1	SR 52 FROM E OF LAND O LAKES BLVD TO E OF CR 583/EHREN CUTOFF RESURFACING ROADWAY ID: 14120000 BEGPT: 12.591 END PT: 18.050 PM: PRD-PMC	12/29/16	01/13/17	07/10/17
436421-1	SR 54 FROM OLD MILLPOND DR TO LITTLE RD RESURFACING ROADWAY ID: 14570002 BEGPT: .000 END PT: 1.660 PM: PRD-CXI	01/10/17	01/25/17	07/11/17
256323-1	SR 52 (SCHRADER HWY) FROM W OF SUNCOAST PKWY TO E OF US 41 (SR 45) ADD LANES & RECONSTRUCT ROADWAY ID: 14010000 BEGPT: 10.830 END PT: 11.799 PM: PRD-PMC-CBI	12/23/15	03/23/18	08/06/18
256324-2	US 41 (SR 45) FROM N OF CONNERTON BLVD TO S OF SR 52 ADD LANES & RECONSTRUCT ROADWAY ID: 14010000 BEGPT: 8.881 END PT: 11.112 PM: PRD-TRO-FDA	04/15/16	04/11/19	08/23/19
256422-2	US 301 (SR 41/GALL) FROM SR 39 TO S OF CR 54 ADD LANES & RECONSTRUCT ROADWAY ID: 14050000 BEGPT: 3.452 END PT: 4.509 PM: PRD-CFB-PIT	11/17/15	12/23/19	06/24/20
416564-2	US 301 FROM SR 56 (PROPOSED) TO SR 39/PAUL BUCHMAN HWY ADD LANES & RECONSTRUCT ROADWAY ID: 14050000 BEGPT: 2.020 END PT: 3.764 PM:	01/02/19	01/16/19	07/02/20
430573-1	I75/SR 56 INTERCHANGE FROM W OF CR 54 TO W OF CYPRESSRIDGE BLVD INTERCHANGE IMPROVEMENT ROADWAY ID: 14091000 BEGPT: 1.000 END PT: 1.961 PM: PLN-SVH-HWL	05/16/19	05/30/19	07/23/20
435719-1	TRI-COUNTY TRAIL FROM PASCO CO/L TO S TERMINUS OF STARKEY TRAIL BIKE PATH/TRAIL ROADWAY ID: BEGPT: END PT: PM: PRD-EES	10/26/16	11/09/16	07/27/20
435142-1	SR 52 EXTENSION FROM E OF MCKENDREE RD TO E OF FORT KING RD NEW ROAD CONSTRUCTION ROADWAY ID: 14120000 BEGPT: 24.171 END PT: 29.070 PM: PRD-CFB	11/29/18	05/12/20	09/11/20
430381-1	SR 52 (SCHRADER HWY) @ US 41/SR 45 INTERSECTION IMPROVEMENT ROADWAY ID: 14010000 BEGPT: 10.933 END PT: 11.473 PM: PRD-PMC	03/02/16	02/10/21	06/04/21

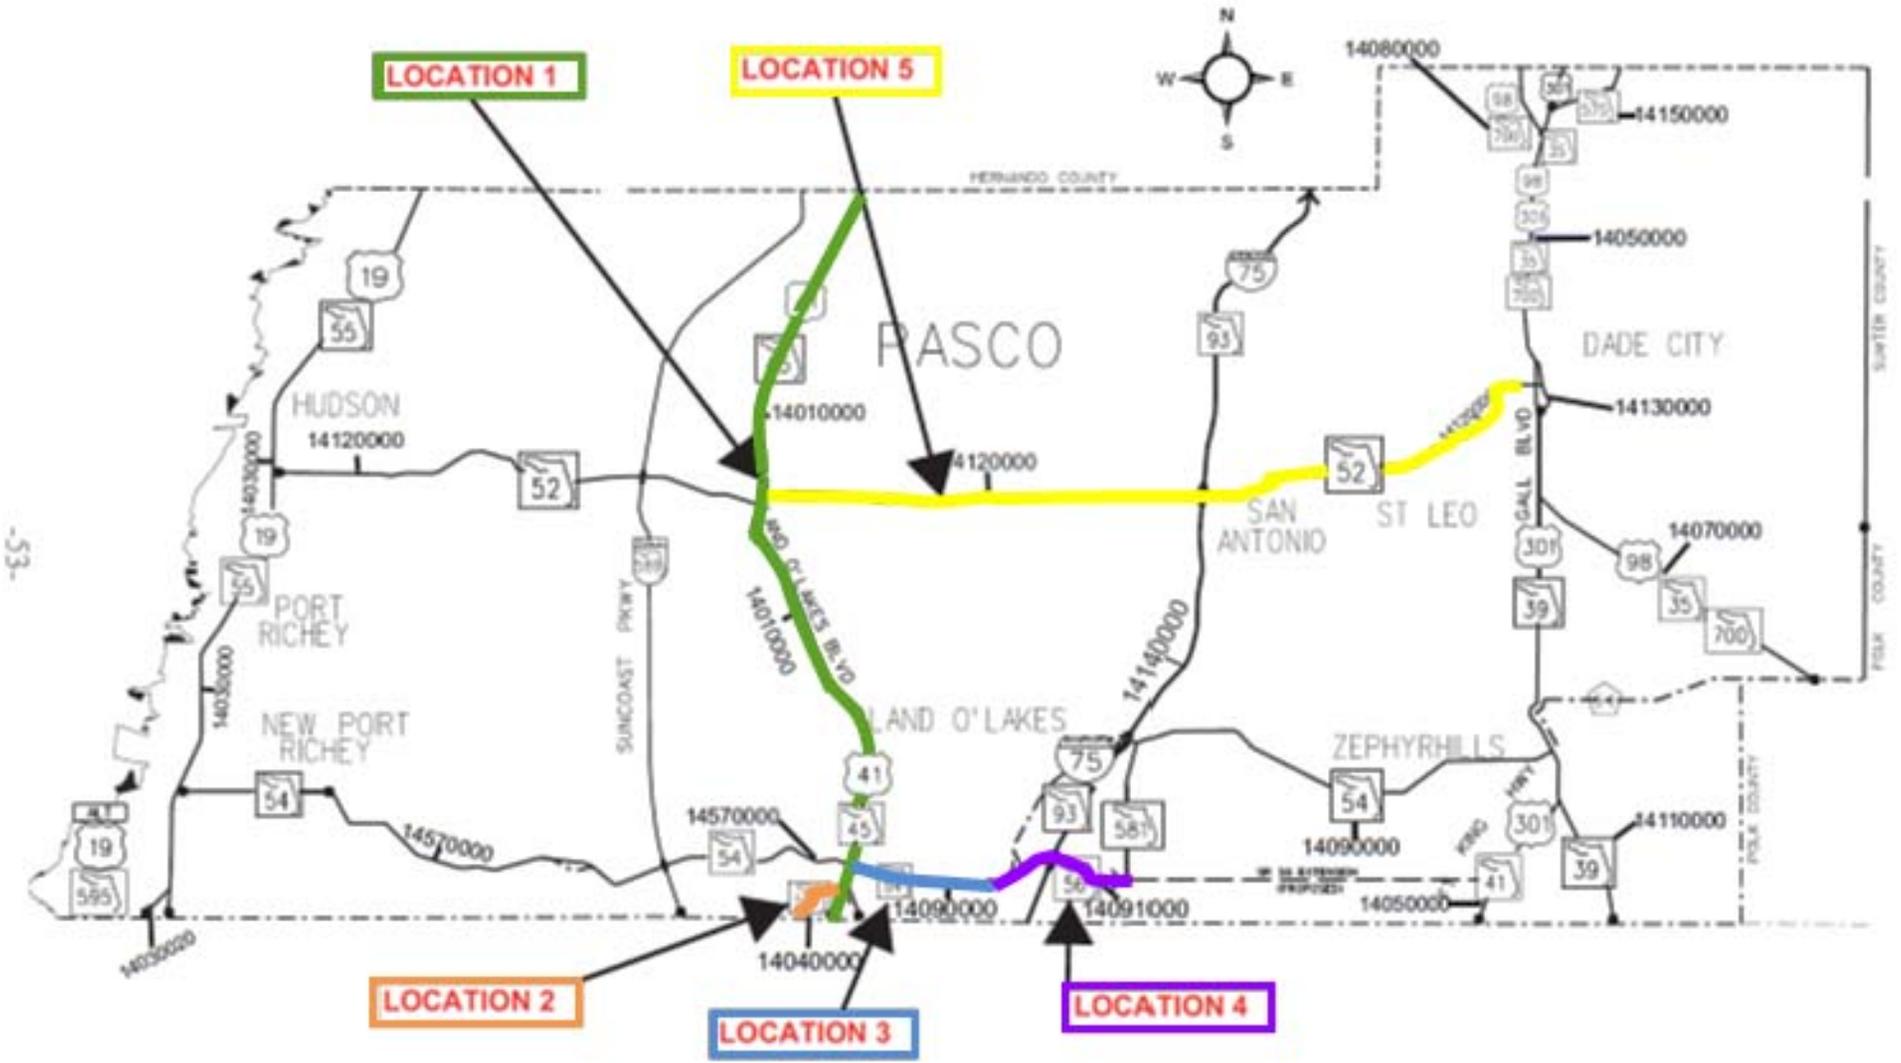

ATTACHMENTS

PROJECT INFORMATION AND LOCATION SHEET/MAP BROOKSVILLE MAINTENANCE MOWING, LITTER REMOVAL, AND EDGE AND SWEEP

The locations for site specific work are on primary roads in Central Pasco County. The following describes the mileage and quantities at each location.

PASCO COUNTY

LOCATION 1

Section 14010: On U.S. 41 (S.R.45) from the Hillsborough/Pasco county line to the Pasco/Hernando county line. M.P. 0.000 to 19.800

<u>Item Number</u>	<u>Description</u>	<u>Total Quantities</u>
E104- 4- 1	Mowing (Regular/Large Machine)	173.94 AC
E104- 4- 2	Mowing (Slopes)	4.12 AC
E104- 4- 3	Mowing (Small Machine)	22.96 AC
E110- 30	Litter Removal	201.02 AC
E110- 32- 1	Edging and Sweeping	47.789 MI

LOCATION 2

Section 14040: On S.R. 597 (Dale Mabry) from Hillsborough/Pasco county line to U.S. 41 (S.R. 45) M.P. 0.000 to 1.263

<u>Item Number</u>	<u>Description</u>	<u>Total Quantities</u>
E104- 4- 1	Mowing (Regular/Large Machine)	10.52 AC
E104- 4- 2	Mowing (Slopes)	0.00 AC
E104- 4- 3	Mowing (Small Machine)	1.09 AC
E110- 30	Litter Removal	11.61 AC
E110- 32- 1	Edging and Sweeping	4.088 MI

LOCATION 3

Section 14090: On S.R. 54 from U.S. 41 (S.R. 45) to Carpenters Run.
M.P. 0.000 to 3.631

<u>Item Number</u>	<u>Description</u>	<u>Total Quantities</u>
E104- 4- 1	Mowing (Regular/Large Machine)	46.70 AC
E104- 4- 2	Mowing (Slopes)	3.34 AC
E104- 4- 3	Mowing (Small Machine)	6.93 AC
E110- 30	Litter Removal	56.97 AC
E110- 32- 1	Edging and Sweeping	16.786 MI

LOCATION 4

Section 14091: On S.R. 56 from Carpenters Run to S. R. 581.
M.P. 0.000 to 3.711

<u>Item Number</u>	<u>Description</u>	<u>Total Quantities</u>
E104- 4- 1	Mowing (Regular/Large Machine)	76.74 AC
E104- 4- 2	Mowing (Slopes)	5.38 AC
E104- 4- 3	Mowing (Small Machine)	1.55 AC
E110- 30	Litter Removal	83.67 AC
E110- 32- 1	Edging and Sweeping	5.082 MI

LOCATION 5

Section 14120: On S.R. 52 from U.S. 41 (S.R. 45) to 10th Street (Dade City).
M.P. 12.421 to 32.954

<u>Item Number</u>	<u>Description</u>	<u>Total Quantities</u>
E104- 4- 1	Mowing (Regular/Large Machine)	162.34 AC
E104- 4- 2	Mowing (Slopes)	1.97 AC
E104- 4- 3	Mowing (Small Machine)	2.06 AC
E110- 30	Litter Removal	166.37 AC
E110- 32- 1	Edging and Sweeping	6.041 MI