



*Operates the statewide
Turnpike System as
part of the Florida
Department of
Transportation*

CHARLIE CRIST
Governor

STEPHANIE C. KOPELOUSOS
Secretary of
Transportation

JAMES L. ELY
Executive Director

Turnpike Headquarters:
Milepost 263, Bldg. 5315
Turkey Lake Service Plaza
Ocoee, FL 34761

Mailing Address:
P.O. Box 613069
Ocoee, FL 34761

Tel: 407.532.3999

www.floridasturnpike.com

ADDENDUM NO. 1

DATE: June 2, 2010
TO: PROSPECTIVE BIDDERS AND PLAN HOLDERS
FROM:  Richard M. Nethercote, Jr.,
District Contracts Administrator, Florida's Turnpike Enterprise
SUBJECT: **CONTRACT NO.:** E8K63
FINANCIAL PROJECT NO.: 190778-1-52-46
COUNTIES: Hillsborough, Pasco, Hernando
PROJECT NAME: Landscape Maintenance

BIDS TO BE RECEIVED: June 8, 2010 at 2:30 P.M. Local Time

Proposers and other interested parties are informed that the above-referenced documents are hereby revised, changed and supplemented as set forth below:

MISSING PLAN SHEETS

Included in this addendum are five (5) missing plan sheets LD-7 through LD-11 for the above-referenced project. Please go to the Turnpike Contracts Administration Website at www.dot.state.fl.us/contractsadministrationturnpike to download this complete addendum with the missing sheets. Please include these sheets with the plans you have already received.

AMENDMENT NOTIFICATION

If you are a PROPOSAL HOLDER who intends to bid electronically using Expedite and/or Bid Express, please go to the Turnpike Contracts Administration Website at www.dot.state.fl.us/contractsadministrationturnpike to download Amendment No. 1 for this contract, file no. 08JUN001.001.

If you are a PROPOSAL HOLDER who intends to bid electronically using Expedite and/or Bid Express, please acknowledge receipt of this addendum in Expedite Bid by opening the Acceptance of Bidding Acknowledgements folder to confirm your acknowledgement of Amendment and Addenda Files. Failure to load all amendment files will cause the bid to be rejected.

If you are a PROPOSAL HOLDER who intends to submit a hardcopy bid, please acknowledge receipt of this Addendum on Page 1 of the Form 375-020-08 of your Proposal, and return with your bid.

All other conditions of the subject contract remain unchanged.

If you have any questions regarding this information, please do not hesitate to contact Rich Nethercote at the same number as shown above, ext. 3885.

Attachment



LEGEND	
	BUFORD HOLLY/ILEX CORNUTA VAR DWF BURFORD
	SIMPSON STOPPER/MYRCIANTHESE FRAGRANS
	CORD GRASS/SPARTINA BAKERII

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION

PLANS PREPARED BY:

 FLORIDA'S TURNPIKE ENTERPRISE


STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION		
ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 569	PASCO	

PLAN


SHEET NO.
LD-7

PLANTING NOTES:


1. BED PREPARATION FOR ALL BEDS:
TREAT 2 TIMES WITH POST-EMERGENT HERBICIDE AT 2 WEEK INTERVALS. MOW TURF TO 1" & MULCH.
2. ALL TREE & PALM GROUPS SHALL CONTAIN A MIX OF EQUAL PROPORTIONS OF 3 SIZES (33%) AS SPECIFIED IN THE TABULATION OF QUANTITIES. RANDOMLY MIX THE SIZES AT PLANTING TO APPROXIMATE A NATURAL STAND.
3. UNDERSTORY MIX FOR CYPRESS PLANTINGS SHALL BE 50% PICKEREL WEED & 50% SWAMP LILY

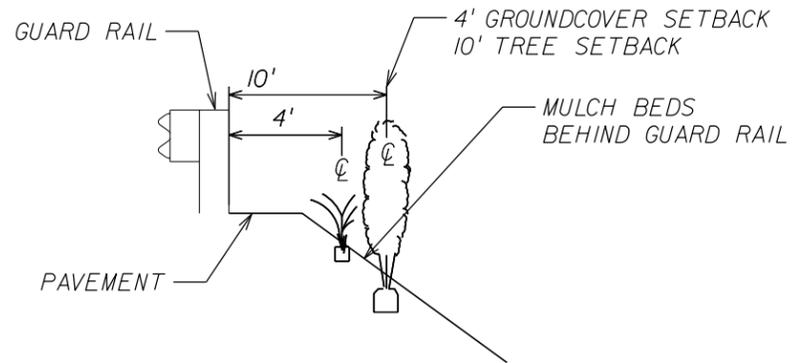

TYPICAL GUARD RAIL PLANTING
NTS

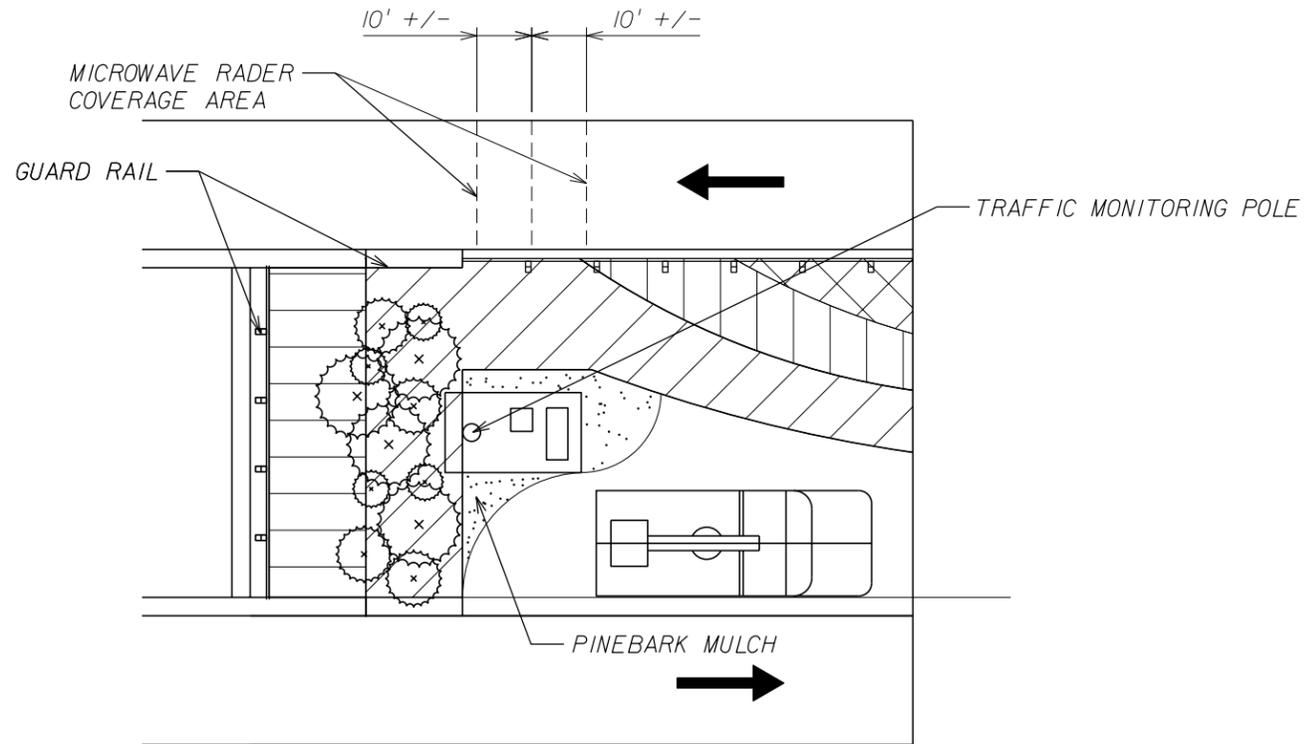

TRAFFIC MONITORING SITE DETAIL
NTS

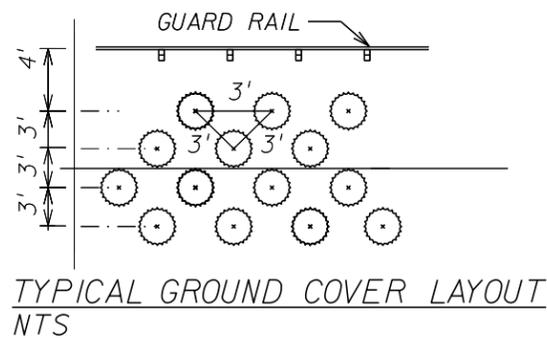

TYPICAL GROUND COVER LAYOUT
NTS

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION



PLANS PREPARED BY:
FLORIDA'S TURNPIKE
ENTERPRISE









STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 569	PASCO	

DETAILS

SHEET
NO.

LD-8

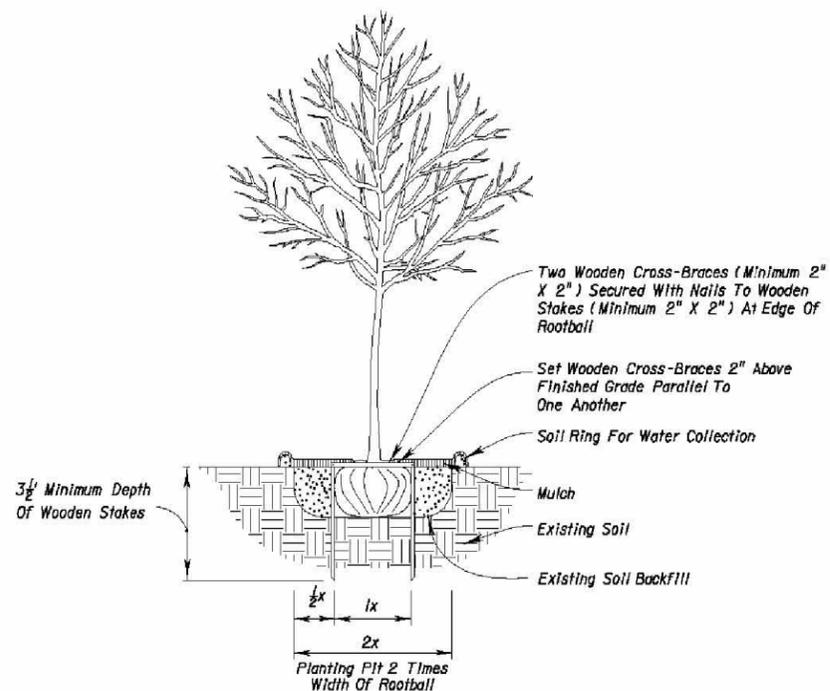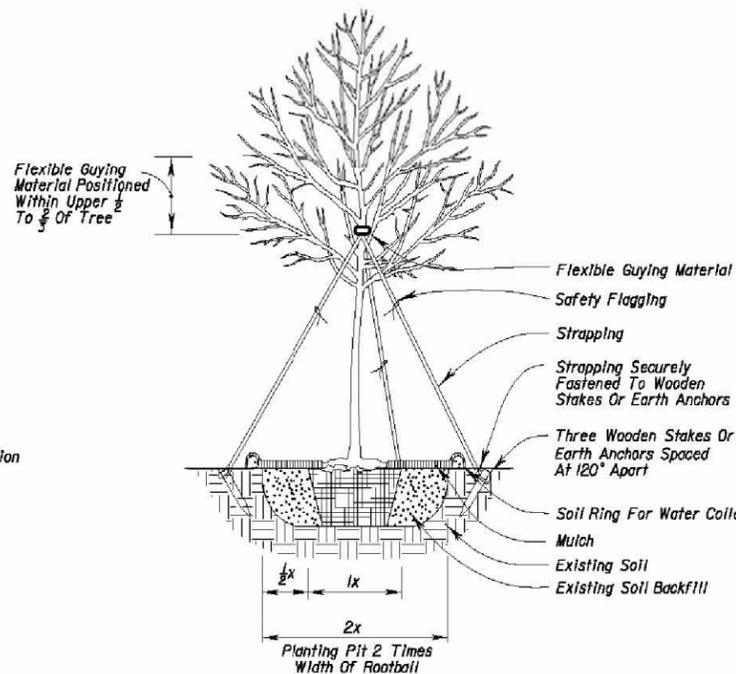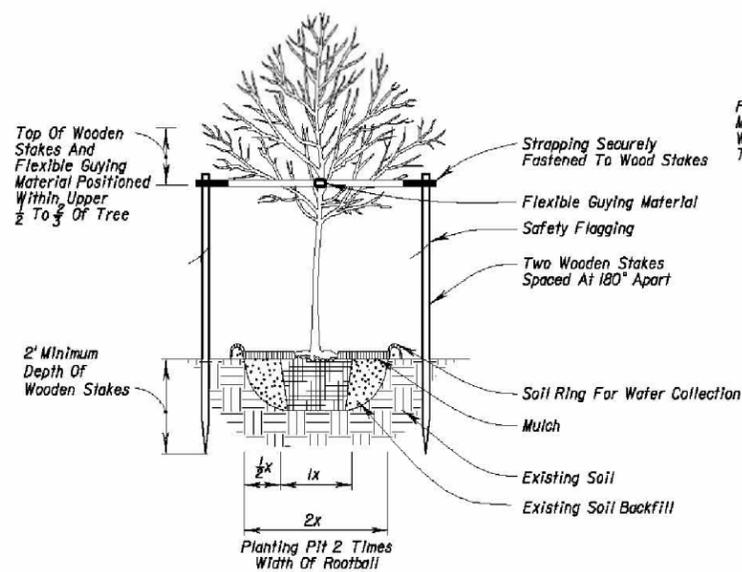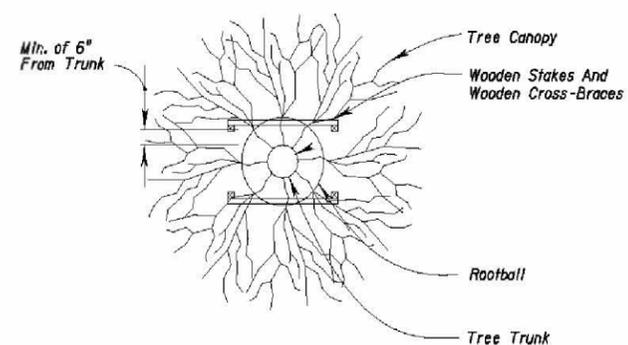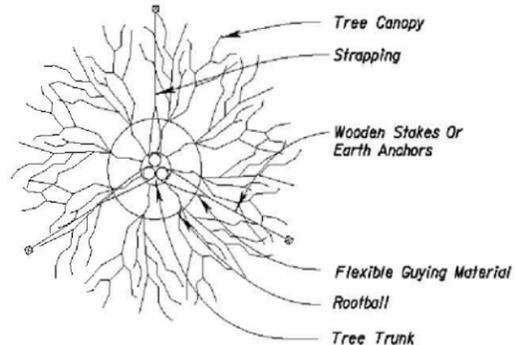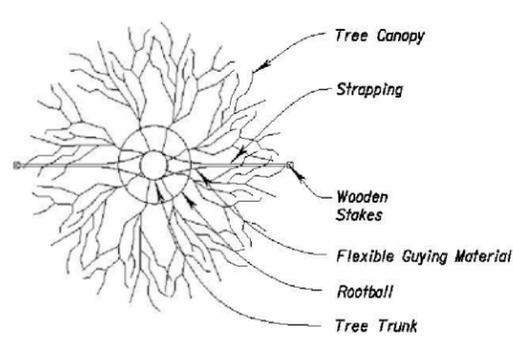

1" - 3 1/2" Caliper Tree Planting

4" and Larger Caliper Tree Planting

Tree Planting With Wooden Stakes

General Notes:

1. All dimensions 6" and less are exaggerated for illustrative purposes only.
2. Plant containers shall be removed prior to planting. If plants are not container grown, remove a minimum of the top 1/3 of burlap, fabric, or wire mesh.
3. Rootballs shall be set 1"-2" above finished grade and set plumb to the horizon.
4. Backfill shall be loosened existing soil. Remove rocks, sticks, or other deleterious material greater than 1" in any direction prior to backfilling. Water and tamp to remove air pockets. If existing soils contain excessive sand, clay, or other material not conducive to proper plant growth contact Engineer prior to planting.
5. Soil rings shall be constructed of existing soil at the outer edge of the planting pit with a height and width of 6".
6. Mulch shall be a 3" deep layer placed to the edge of the trunk flare, around the base of shrub, or solidly around groundcover.
7. Strapping shall be minimum 1" wide nylon or polypropylene. Guying material in contact with tree shall be soft, pliable, and flexible plastic or rubber, securely fastened to wooden stakes. All wooden stakes or earth anchors shall be located beyond the edge of soil ring and located below finished grade.
8. Sabal Palms may be hurricane cut. All other palms must have fronds tied with biodegradable strap. Palm trunks shall have no burn marks, scars, or sanding.
9. All dimensions provided for wooden materials are nominal.
10. When a permanent, subsurface, or drip irrigation system is provided a soil ring is not required. Mulch to edge of planting pit.
11. Commercial tree bracing systems approved by the Engineer may be used in lieu of the tree bracing methods detailed on the Index.

REVISIONS

DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION



PLANS PREPARED BY:
FLORIDA'S TURNPIKE
ENTERPRISE




STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 569	PASCO	

DETAILS


SHEET NO.

LD-9

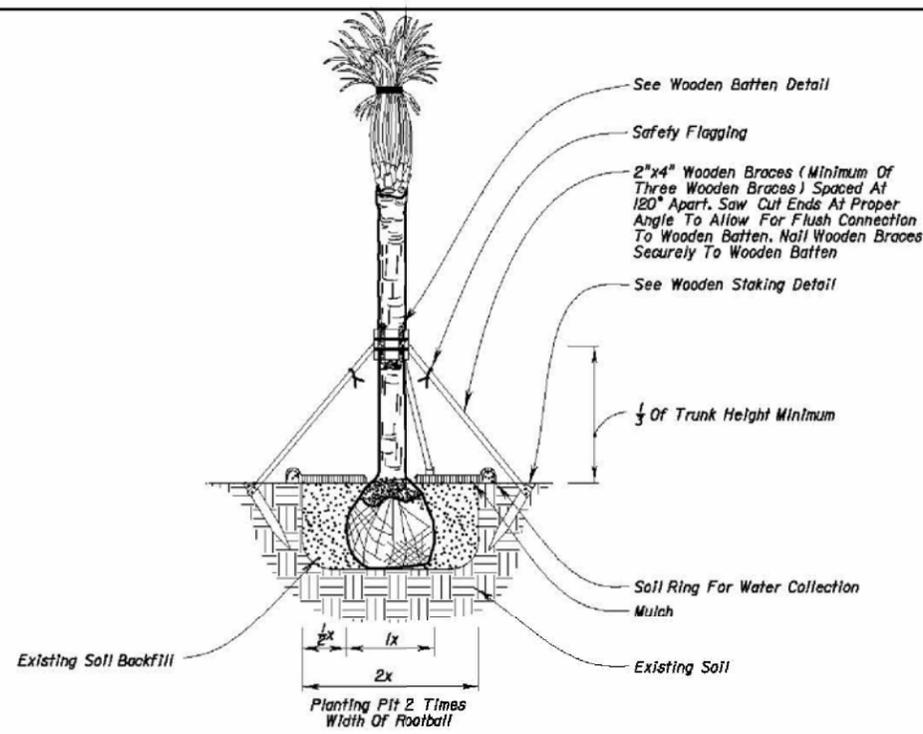


NOTE: For All Palms Over 10' Clear Trunk, Use Installation Detail Provided By Landscape Architect In Contract Plans.

Palm Planting For Up To 10' Clear Trunk


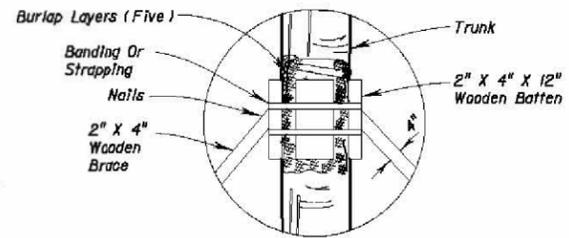


Wooden Batten Detail

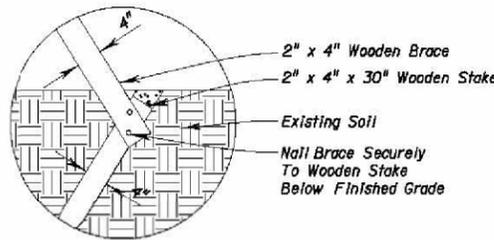


Wooden Staking Detail

NOTE: Stake Into Firm, Existing Soil.

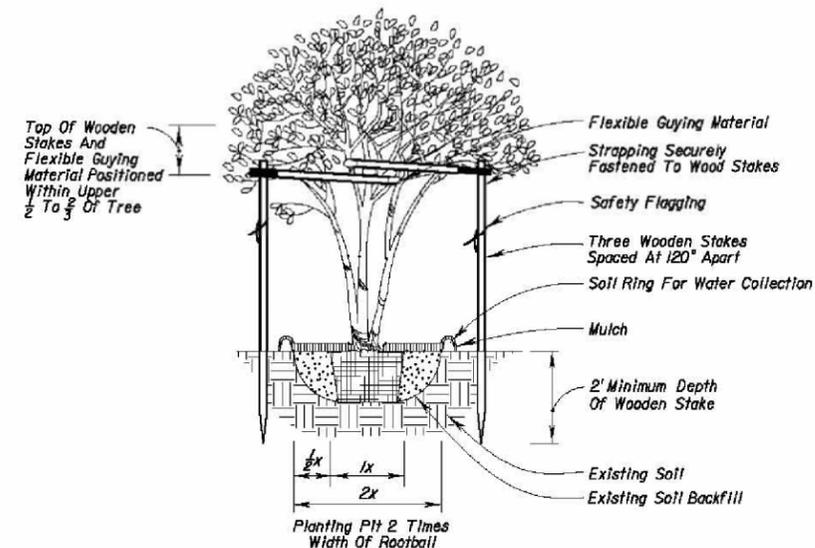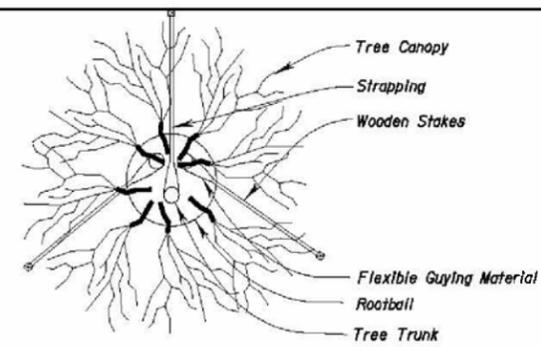


Multi-Trunk Tree Planting

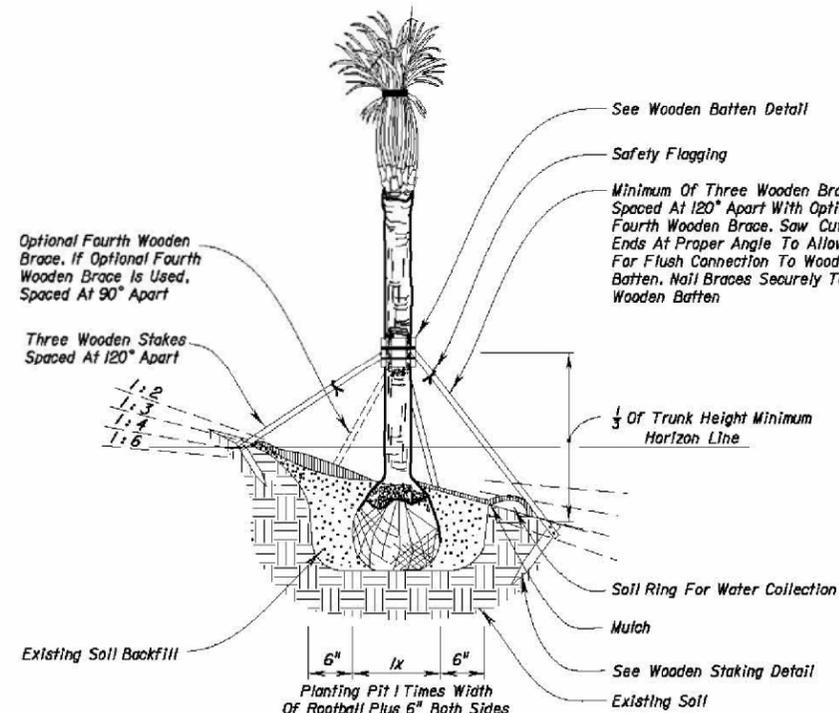


NOTES: Slope Provided As Rise:Run. For All Palms Over 10' Clear Trunk, Use Installation Detail Provided By Landscape Architect In Contract Plans.

Palm Planting On Slope For Up To 10' Clear Trunk

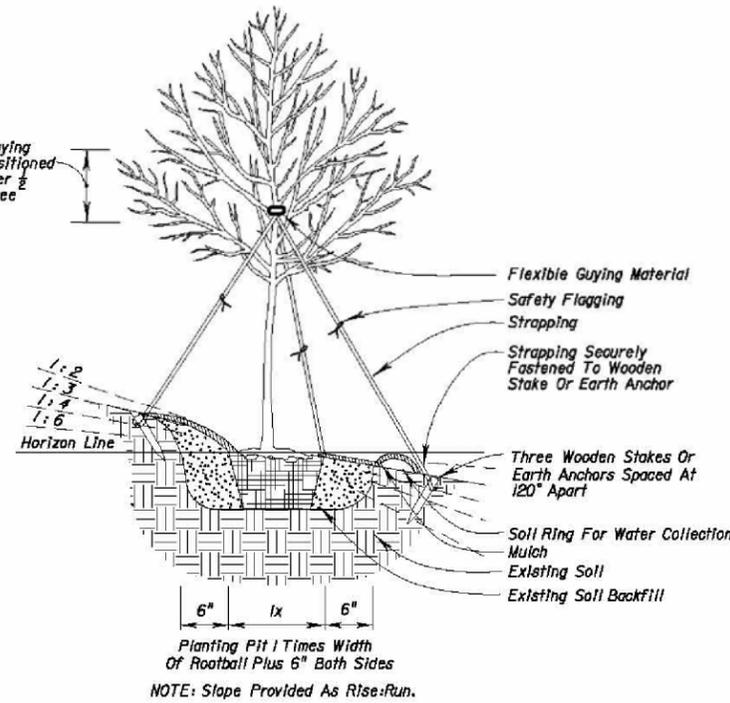

4\"/>

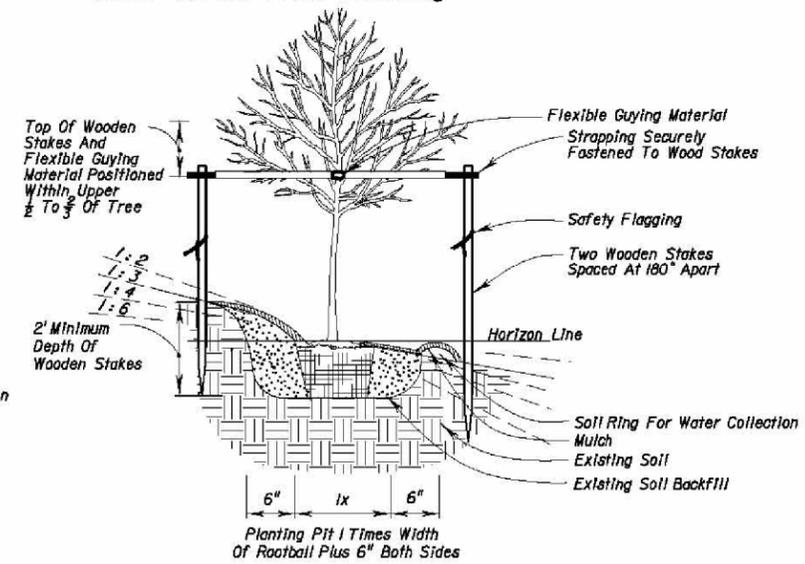

1\"/>

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION



PLANS PREPARED BY:
FLORIDA'S TURNPIKE
ENTERPRISE




STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 569	PASCO	


DETAILS

SHEET NO.

LD-10

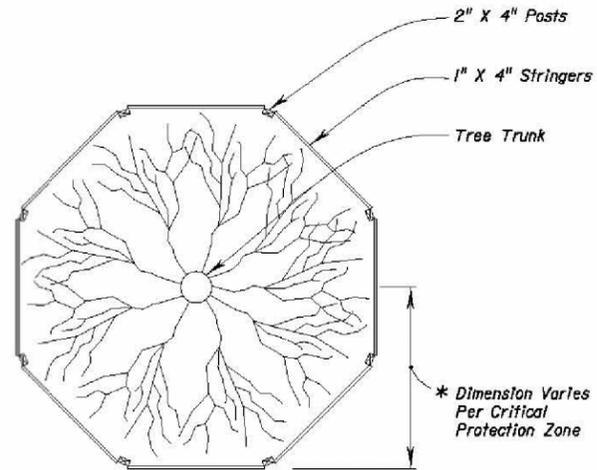


NOTE: For Groups Of Trees, Place Barricades Between Trees And Construction Activity.

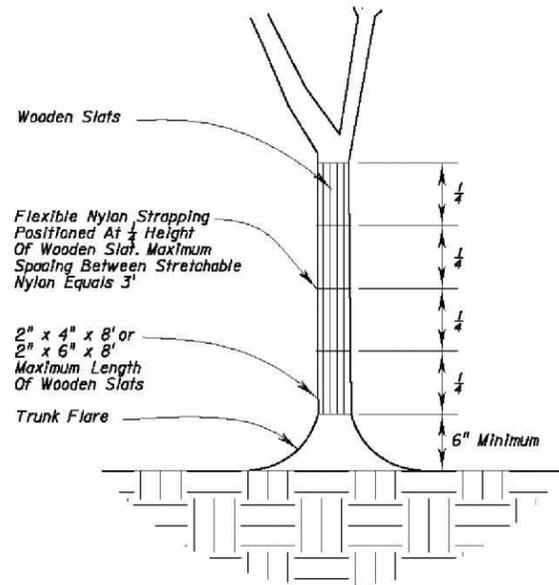


Tree Protection

NOTE: To Be Used When Tree Protection Barricade Can Not Be Provided Due To Roadway Construction, Project Limits, Or Other Existing Constraints.

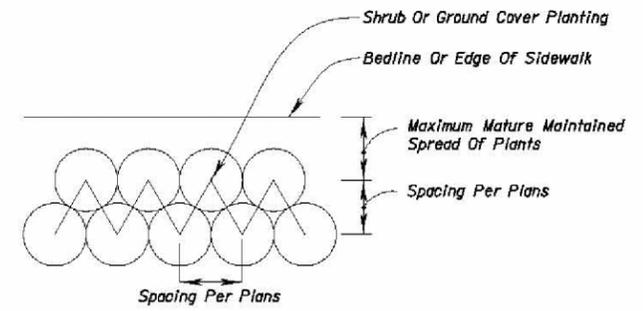


Ground Cover/Shrub Layout Detail

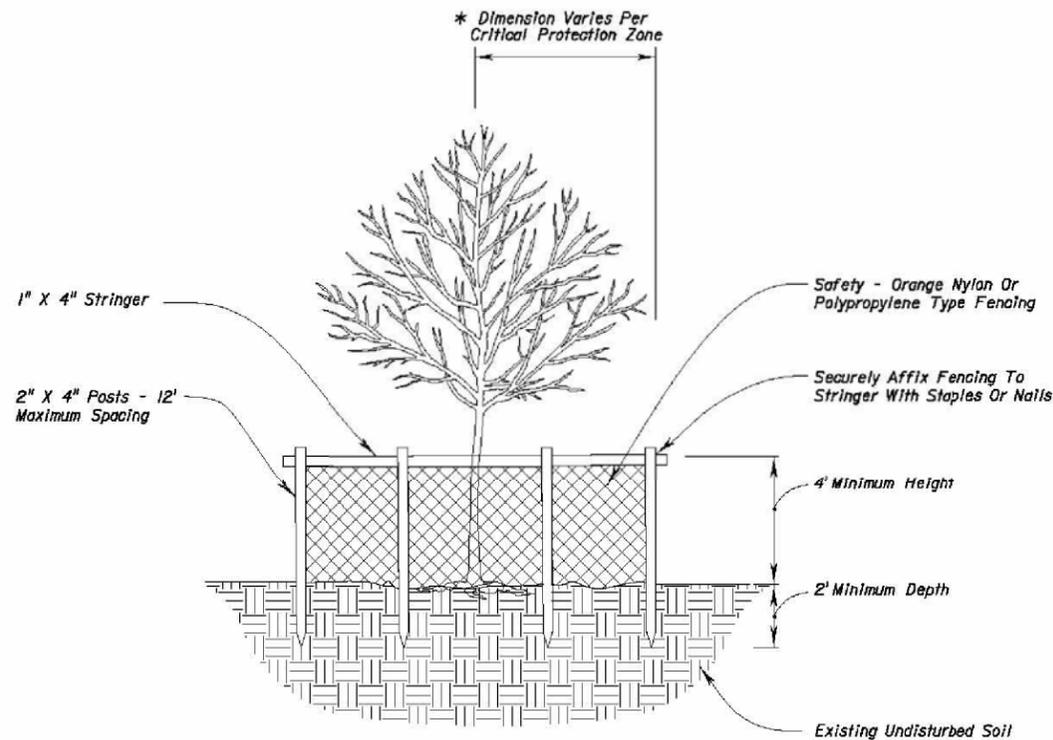


NOTES: Critical Protection Zone: The Area Surrounding A Tree Within A Circle Described By A Radius Of One Foot For Each Inch Of The Tree Trunk Diameter At 54" Above Finished Grade. For Groups Of Trees, Place Barricades Between Trees And Construction Activity.

* Tree Protection Barricades Shall Be Located To Protect A Minimum Of 75% Of The Critical Protection Zone.

Tree Protection Barricade

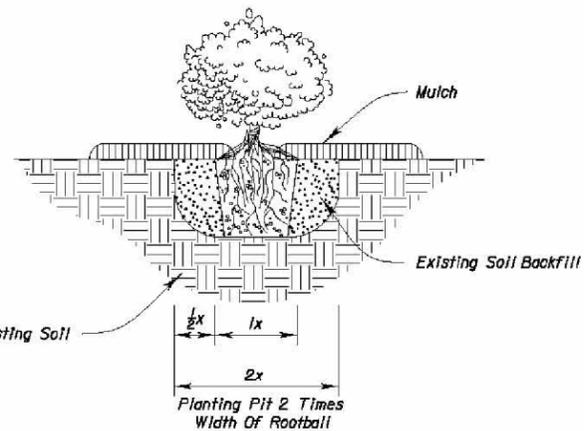

Ground Cover/Shrub Planting

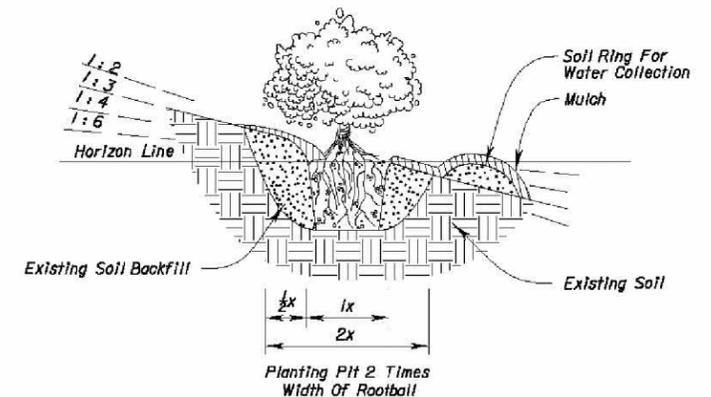

Ground Cover/Shrub Planting On Slope

NOTE: Slope Provided As Rise:Run.

REVISIONS					
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION



PLANS PREPARED BY:
FLORIDA'S TURNPIKE
ENTERPRISE



STATE OF FLORIDA
DEPARTMENT OF TRANSPORTATION

ROAD NO.	COUNTY	FINANCIAL PROJECT ID
SR 569	PASCO	

DETAILS

SHEET NO.

LD-II