

FIGURE A
POLE MOUNTED
DETECTOR STATION

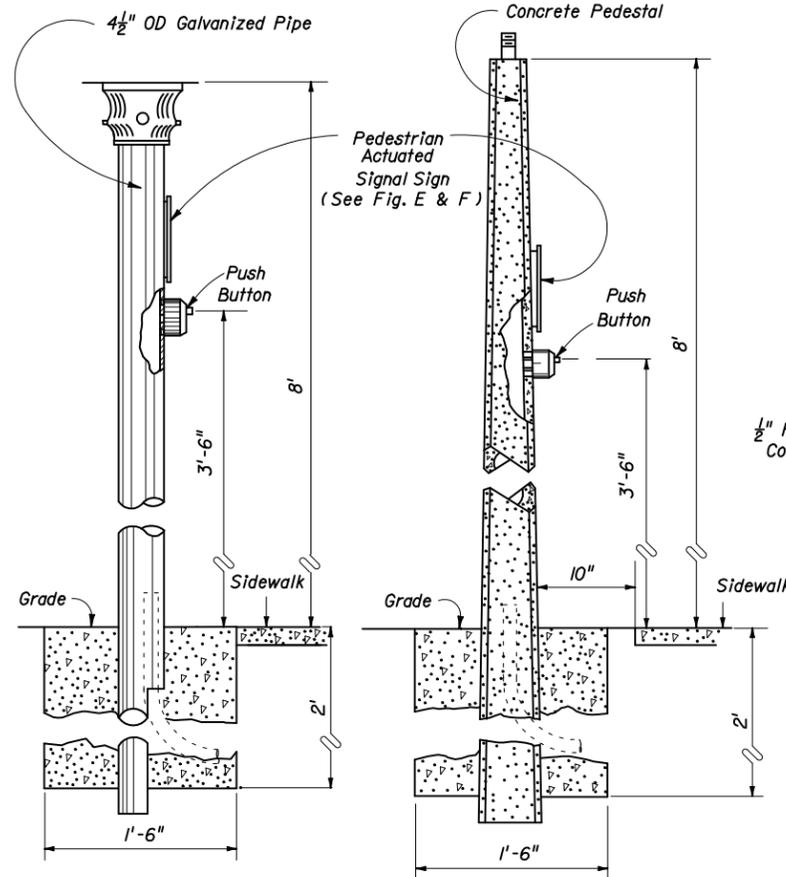


FIGURE B
PEDESTAL STATION
DETECTOR STATION

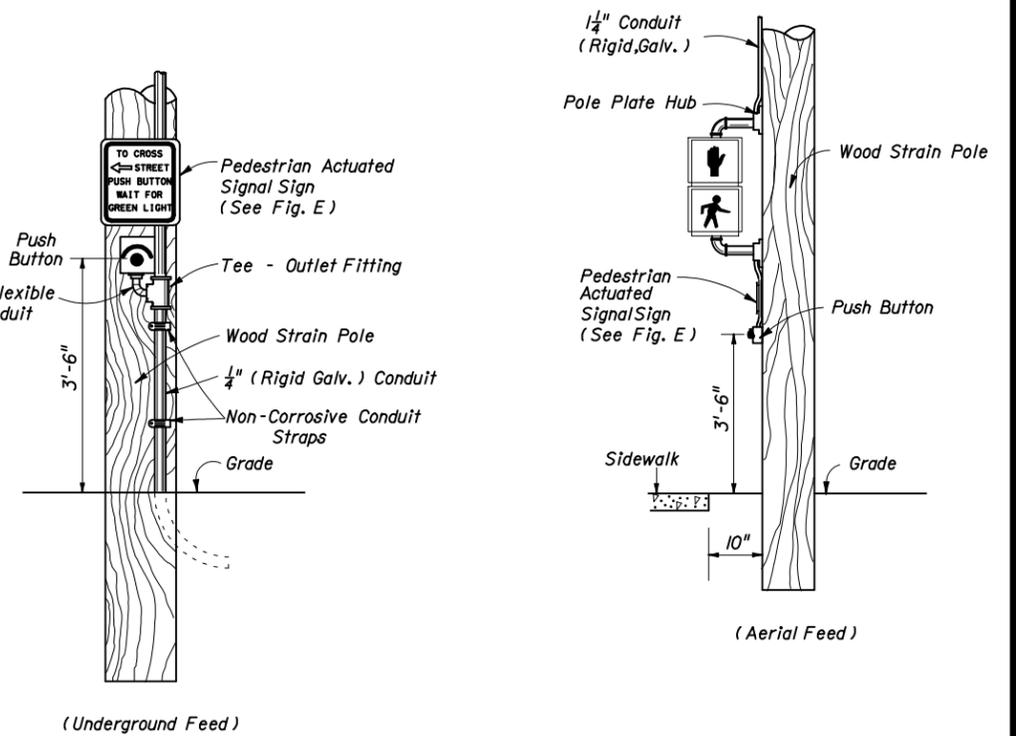


FIGURE C
WOOD POLE MOUNTED
DETECTOR STATION

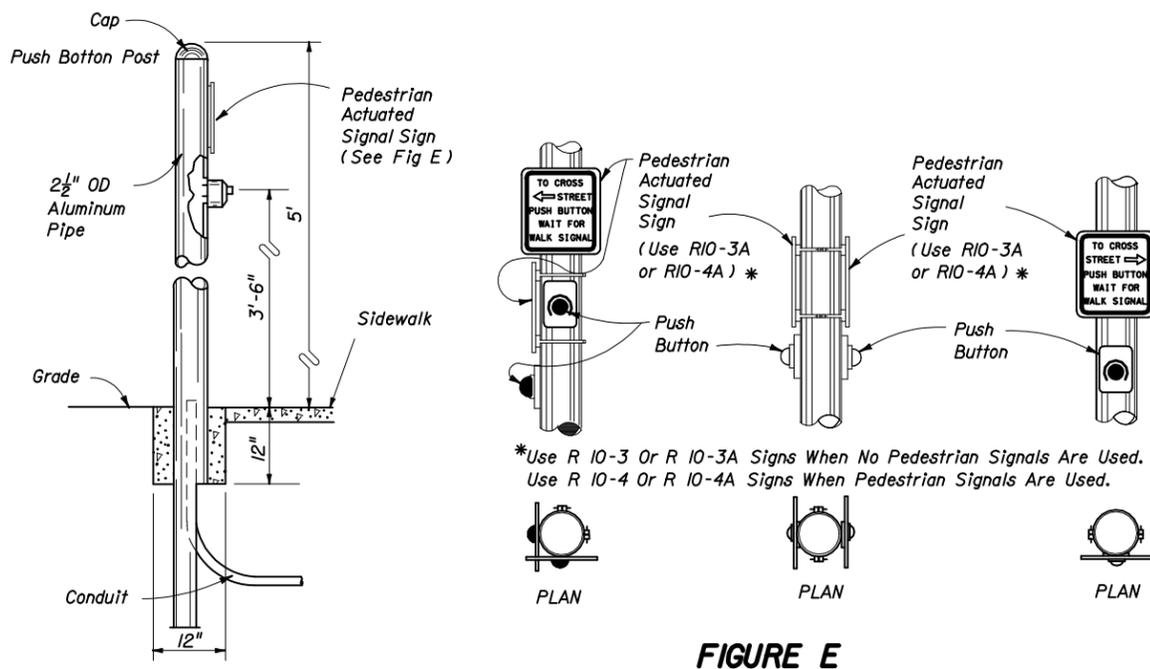


FIGURE D
POST DETECTOR STATION
DETECTOR STATION

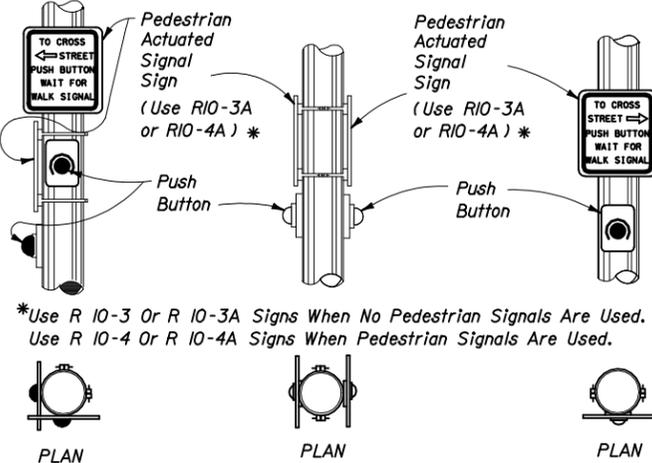


FIGURE E


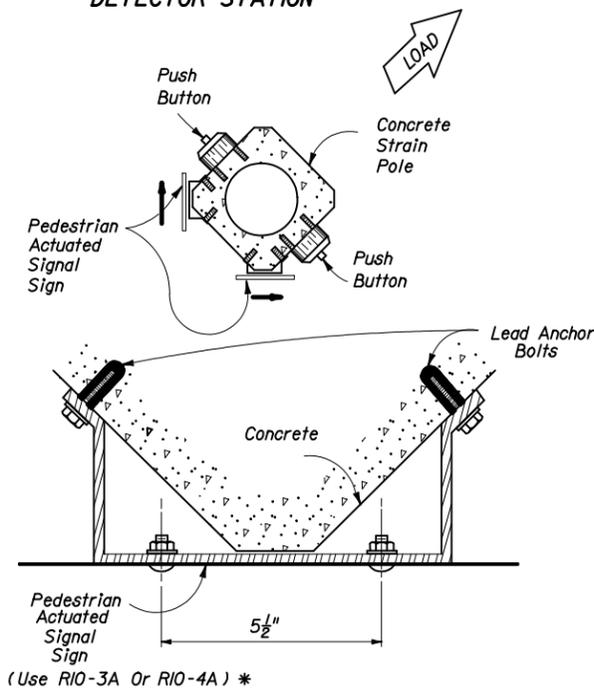


FIGURE F


Notes:

- 1 Signs (R10-3A & R10-4A) shall be mounted above detectors, explaining their purpose and use.
- 2 The positioning of pedestrian push button should clearly indicate which cross-walk signal is actuated by each push button.
- 3 Push buttons and signs are to be mounted in accordance with Standard Specifications, section 665.
- 4 Meet all grounding requirements of Section 620 of the Standard Specifications.


STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION				
PEDESTRIAN DETECTOR ASSEMBLY INSTALLATION DETAILS				
Names	Dates	Approved By		
Designed By		<i>Charles A. Scott</i> State Traffic Standards Engineer		
Drawn By		Revision	Sheet No.	Index No.
Checked By		02	1 of 2	17784

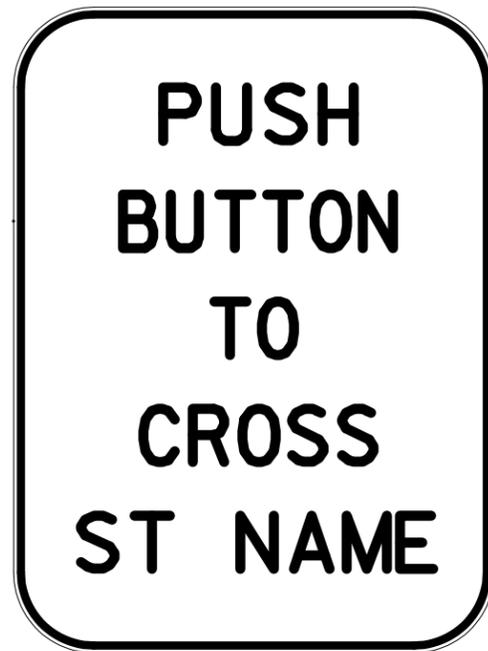

FTP-47

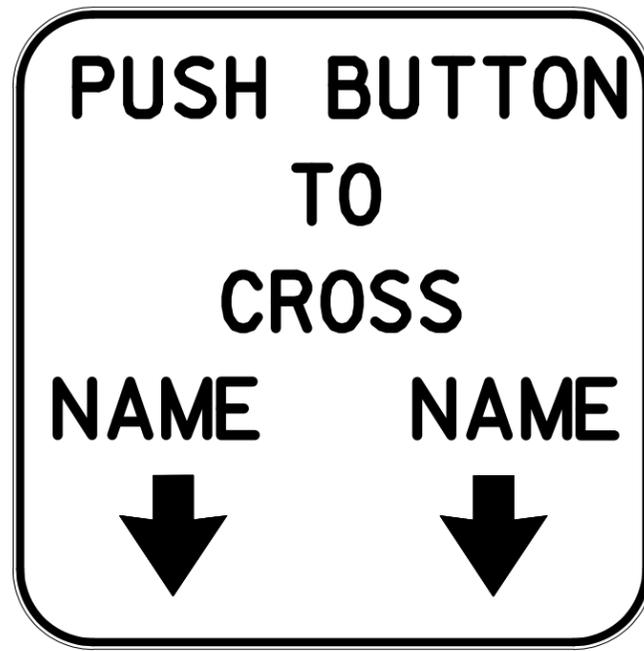

FTP-48

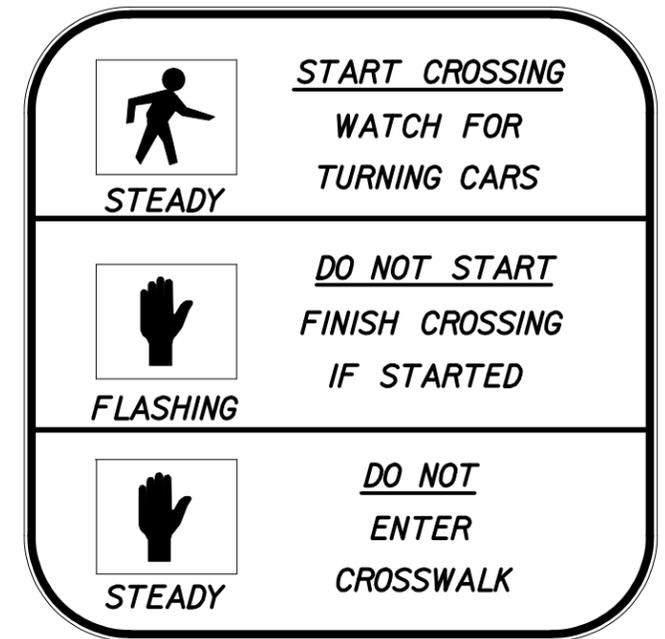


FTP-49

SIGN COLORS WHITE BACKGROUND WITH BLACK LEGEND AND BORDER


INTERNATIONAL WALK SYMBOL  WHITE ON BLACK BACKGROUND.

INTERNATIONAL DONT WALK SYMBOL  ORANGE ON BLACK BACKGROUND.

Note: 1. See Index 17355 for sign details.

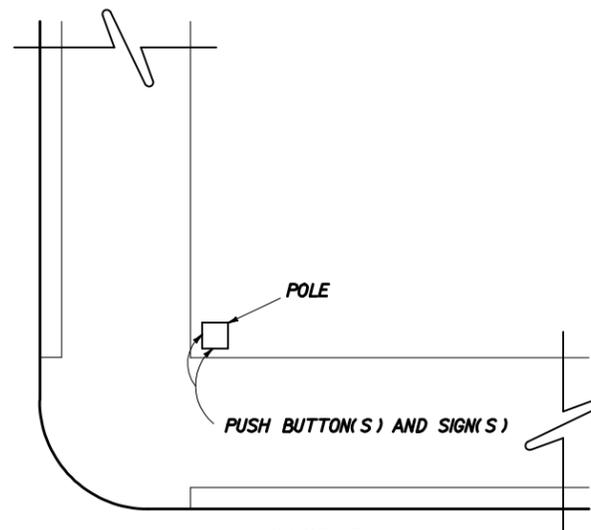

CASE I
POLE PARALLEL TO CURBLINE
ALTERNATE TO FIGURE F

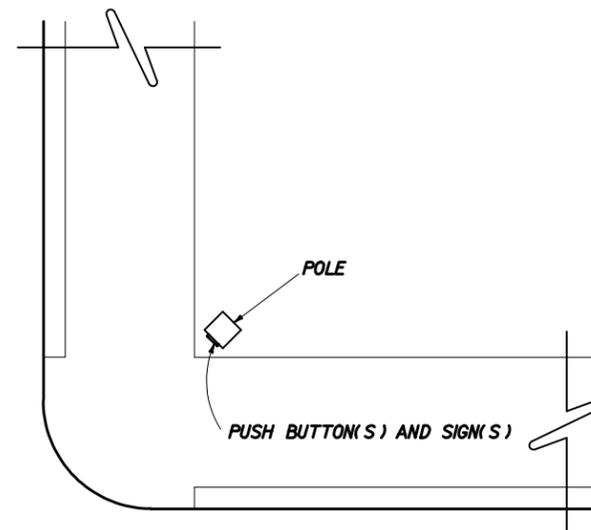

CASE II
POLE DIAGONAL TO CURBLINE

STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION				
PEDESTRIAN DETECTOR ASSEMBLY INSTALLATION DETAILS				
Designed By	Names	Dates	Approved By <i>Clark A. Scott</i>	
Drawn By			State Traffic Standards Engineer	
Checked By	Revision	Sheet No.	Index No.	
	02	2 of 2	17784	