


**Notes:**

1. With the approval of the resident engineer, the service head hole for joint use poles may be drilled by the utility company at an angle of 90° but not less than 45° to the face of the pole.
2. Lashing wire should normally be used for distances of 12' or greater.
3. The overlapped connection of adjustable hangers shall use a minimum of 2 bolts with a minimum spacing of 2" between bolts.
4. Meet all grounding requirements of Section 620 of the Standard Specifications.

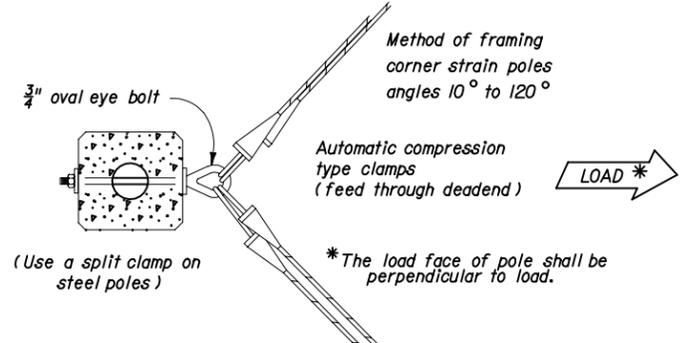


**SINGLE POINT ATTACHMENT**


STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION

**SIGNAL CABLE & SPAN WIRE INSTALLATION DETAILS**

Designed By	Names	Dates	Approved By
Drawn By			<i>Clark A. Smith</i> State Traffic Standards Engineer
Checked By			Revision
			Sheet No.
			Index No.
		02	1 of 2
			17727

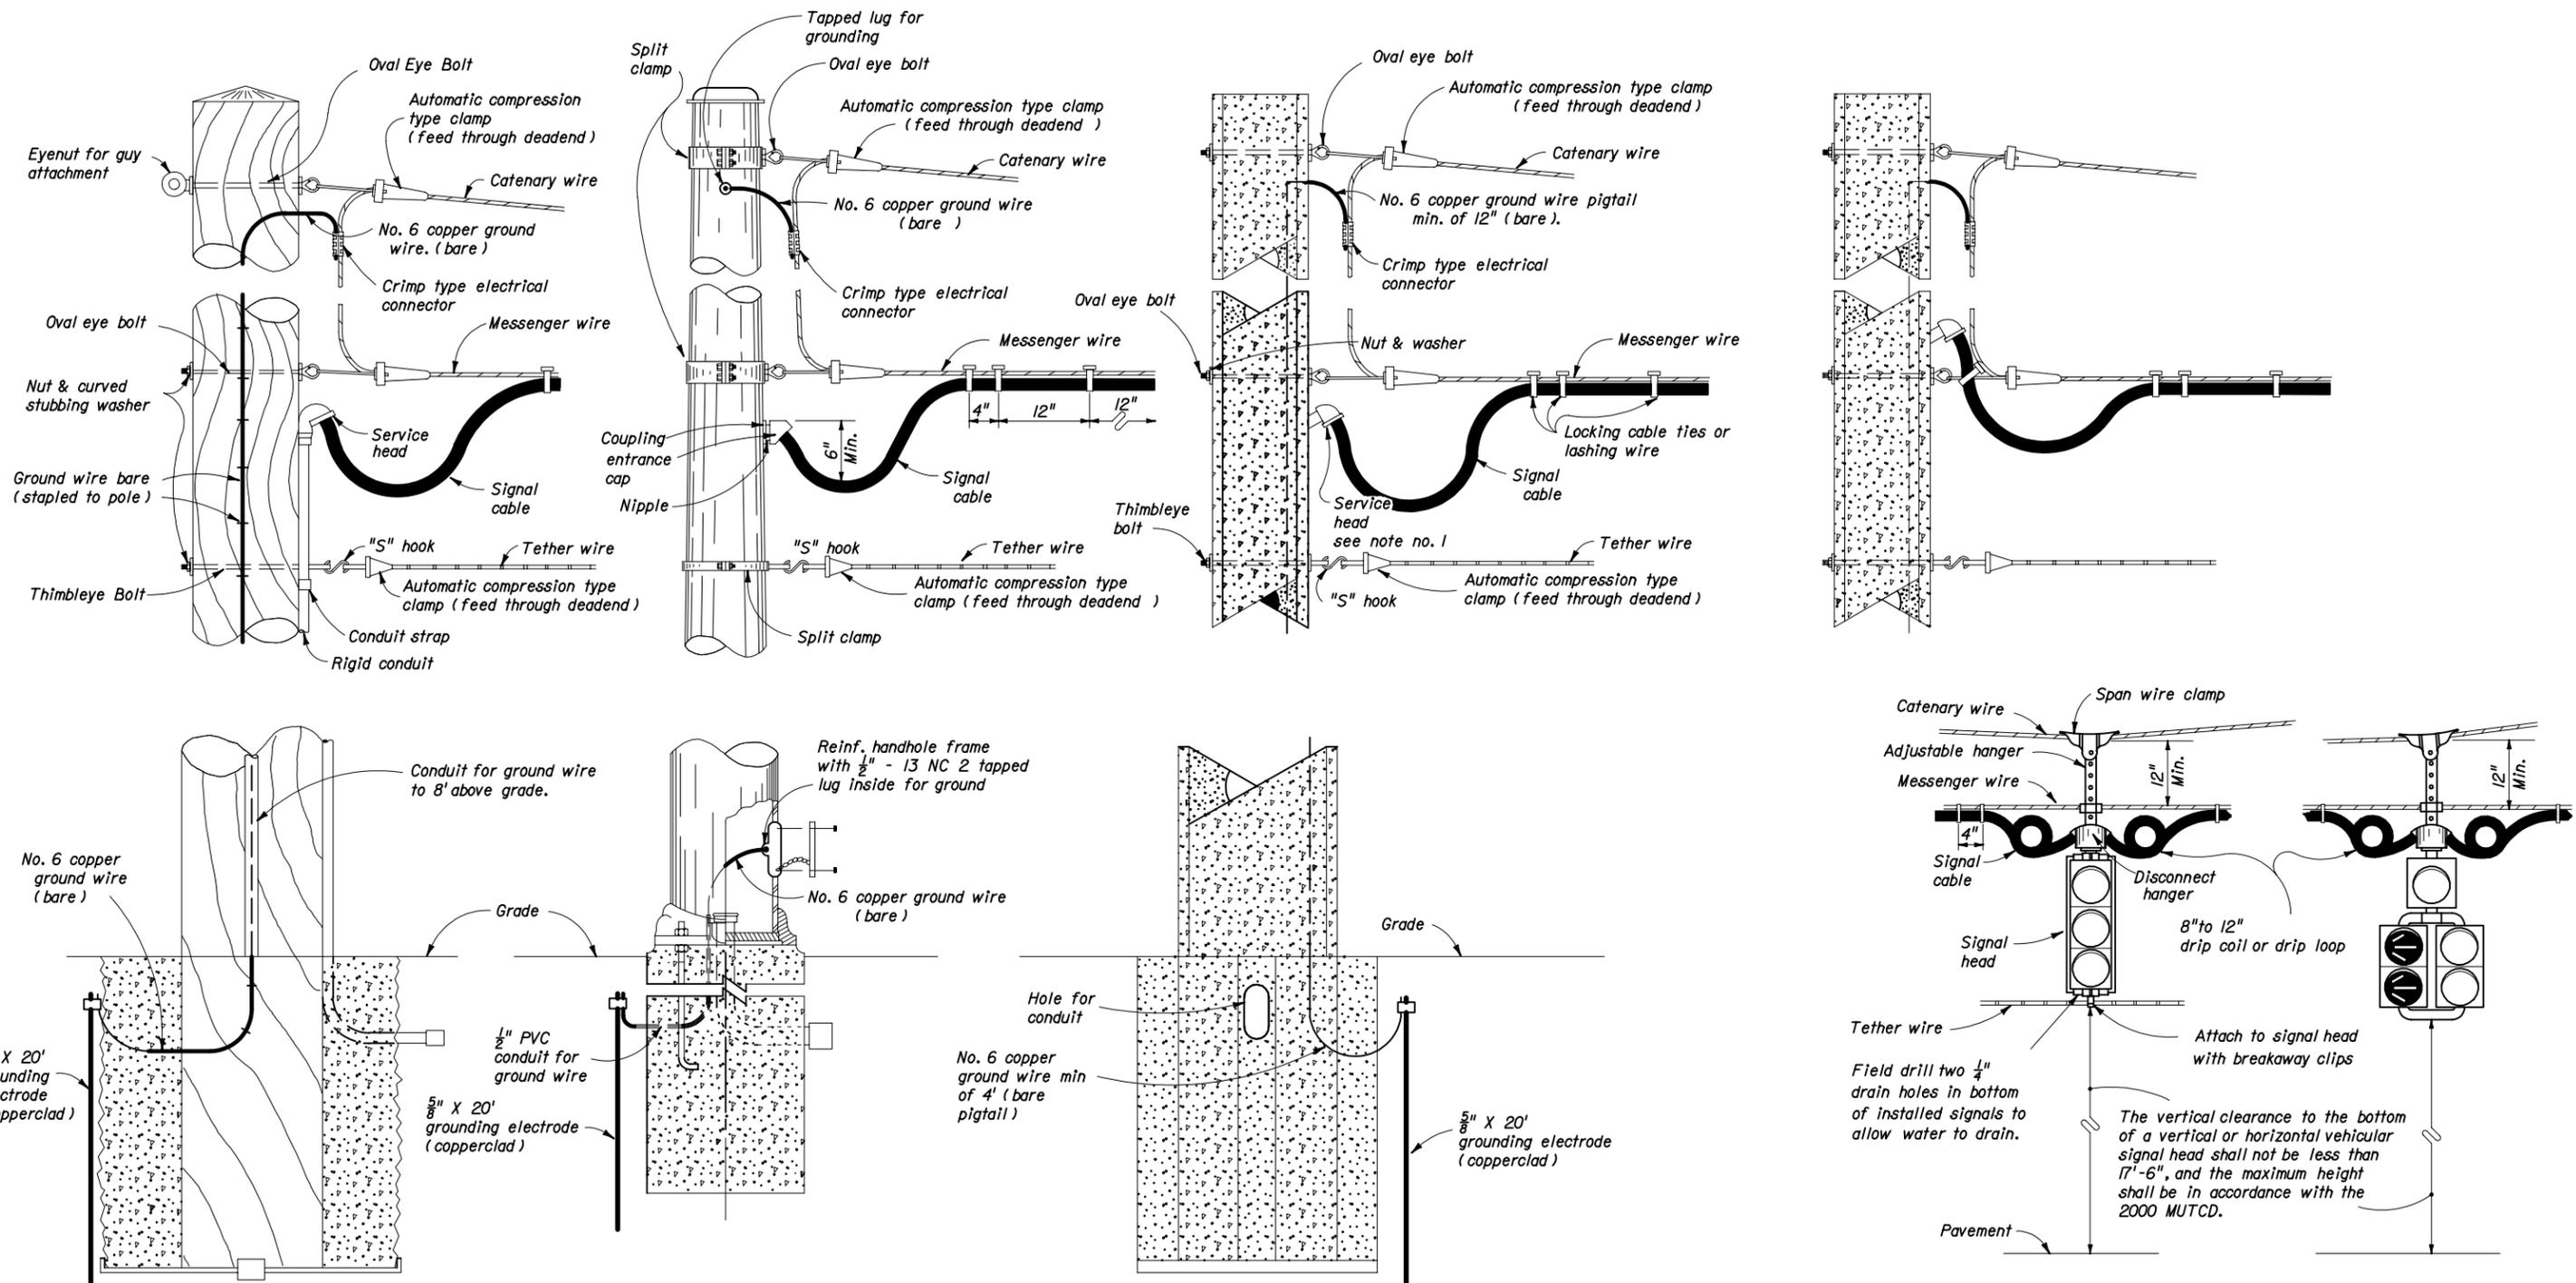

- Notes:
1. With the approval of the resident engineer. The service head hole for joint use poles may be drilled by the utility company at an angle of 90° but not less than 45° to the face of the pole.
  2. Lashing wire should normally be used for distances of 12' or greater.
  3. The overlapped connection of adjustable hangers shall use a minimum of 2 bolts with a minimum spacing of 2" between bolts.
  4. Meet all grounding requirements of Section 620 of the Standard Specifications.

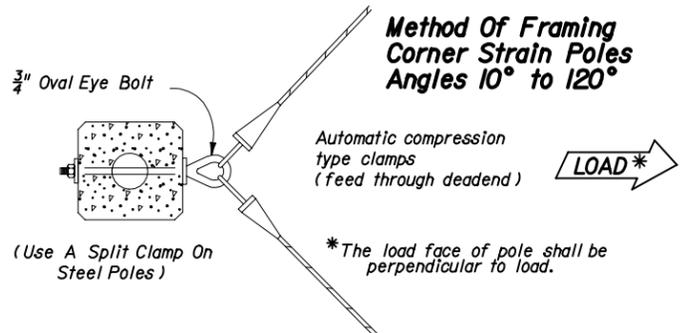

**TWO POINT ATTACHMENT**

STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION

**SIGNAL CABLE & SPAN WIRE  
INSTALLATION DETAILS**

Names	Dates	Approved By		
Designed By		 State Traffic Standards Engineer		
Drawn By		Revision	Sheet No.	Index No.
Checked By		02	2 of 2	17727