




RIGID PAVEMENT

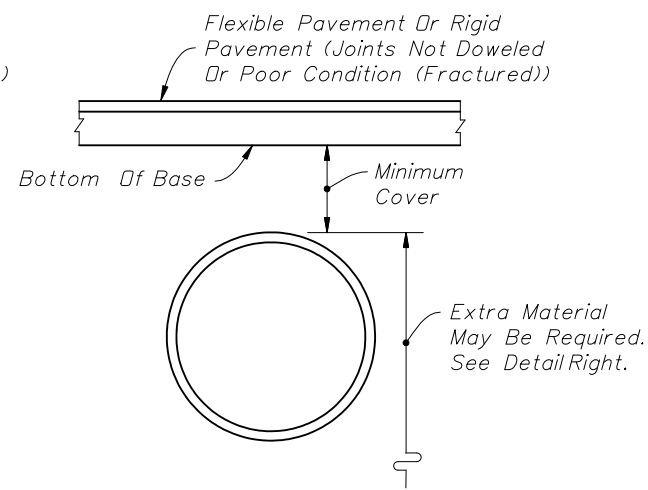

FLEXIBLE PAVEMENT

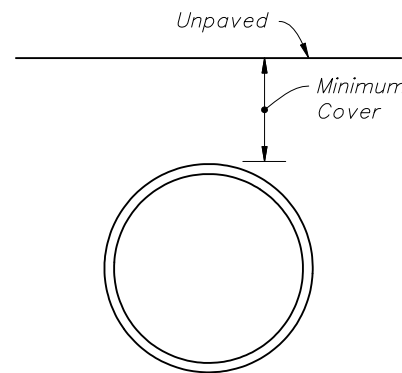


UNPAVED

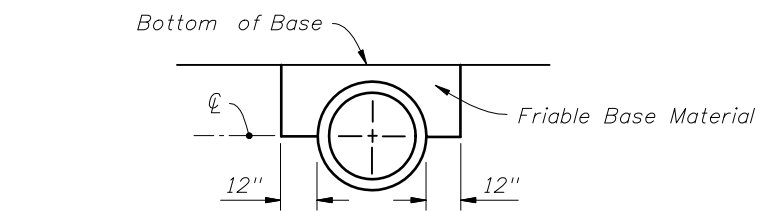

The cost of furnishing and installing the extra base material shall be included in the cost of the culvert.

FRIABLE BASE

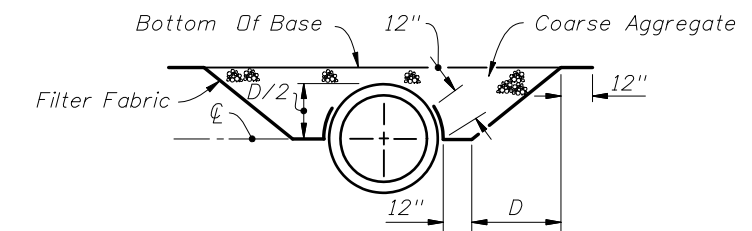

The coarse aggregate shall be placed in 6 inch lifts and compacted sufficiently as to be firm and unyielding. The coarse aggregate shall be gravel or stone meeting the requirements of Standard Specification Sections 901-2 or 901-3 respectively. The gradation shall meet Section 901-1.4, Grades 4, 467, 5, 56, or 57 unless restricted in the plans. The filter fabric shall be Type D-3 (See Index No. 199). The cost of furnishing and installing the coarse aggregate and filter fabric shall be included in the cost of the culvert.

ASPHALTIC CONCRETE BASE

Note: Extra materials required when cross culverts are located on facilities subject to high speed traffic (≥ 55 mph) or high traffic volumes (> 1600 ADT) and the cover is less than 12 inches for concrete pipe, 15 inches for corrugated steel pipe, and 18 inches for corrugated aluminum pipe, corrugated polyethylene and corrugated polyvinyl chloride pipe.

EXTRA MATERIAL FOR CROSS CULVERTS UNDER FLEXIBLE PAVEMENTS

GENERAL NOTES

- The tabulated values are recommended minimum dimensions to withstand anticipated highway traffic loads. Additional cover may be required to support construction equipment loads or highway traffic loads before pavement is completed. Some size thickness combinations may require minimum cover greater than those listed above. See Sheets 2, 3, & 4.
- Less than the tabulated minimum cover may be used provided suitable method(s) are detailed in the plans.
- Values shown in parenthesis () are for 3" x 1" corrugations which must be specified to utilize the lesser cover.
- The tabulated values in the brackets [] apply to Type 1-R (Spiral Rib) pipe which must be specified to utilize the lesser cover.
- Commercial and noncommercial refers to typical vehicular utilization of unpaved roads and drives where rutting and cover displacement may occur.
- For Pipe Class S with diameters of 12" to 30", the minimum height of fill measured from top of finished grade to outside top of pipe is 3 feet.

| PIPE TYPE/SIZE & SHAPE | MINIMUM COVER |
|--------------------------------|---------------|
| CONCRETE (See Note 6) | |
| Round & Elliptical | 9" |
| CORRUGATED STEEL | |
| 15"-72" Round & Arch Equiv. | 9" |
| 78" & Larger Round & Arch Eq. | 15" |
| CORRUGATED ALUMINUM | |
| 15"-72" Round & Arch Equiv. | 9" |
| 78"-102" Round & Arch Equiv. | 15" |
| 108" & Larger Round | 18" |
| CORRUGATED POLYETHYLENE | |
| 15"-60" Round | 9" |
| POLYVINYL CHLORIDE | |
| 15"-48" Round | 9" |

| PIPE TYPE/SIZE & SHAPE | MINIMUM COVER |
|--------------------------------|-----------------|
| CONCRETE (See Note 6) | |
| Round & Elliptical | 7" |
| CORRUGATED STEEL | |
| 12"-30" Round | 12" [12"] |
| 36"-48" Round | 18" (12") [15"] |
| 54"-72" Round | 21" (15") [18"] |
| 78"-96" Round | (18") [27"] |
| 102" & Larger Round | (24") [33"] |
| 15"-30" Arch Equiv. | 18" [18"] |
| 36"-48" Arch Equiv. | 24" (12") [18"] |
| 54"-72" Arch Equiv. | 27" (15") [24"] |
| 78"-96" Arch Equiv. | (18") [30"] |
| 102" & Larger Arch Equiv. | (24") |
| CORRUGATED ALUMINUM | |
| 12"-24" Round | 15" [12"] |
| 30"-48" Round | 18" (12") [18"] |
| 54"-72" Round | 24" (18") [24"] |
| 78"-102" Round | (24") [30"] |
| 108" & Larger | (30") |
| 15"-24" Arch Equiv. | 24" [21"] |
| 30"-48" Arch Equiv. | 27" (15") [24"] |
| 54"-72" Arch Equiv. | 30" (18") [27"] |
| 78"-90" Arch Equiv. | (24") [30"] |
| 96"-102" Arch Equiv. | (30") |
| CORRUGATED POLYETHYLENE | |
| 15"-60" Round | 15" |
| POLYVINYL CHLORIDE | |
| 15"-48" Round | 15" |

| PIPE TYPE/SIZE & SHAPE | MINIMUM COVER | |
|--------------------------------|-----------------|-----------------|
| | COMMERCIAL | NON-COMMERCIAL |
| CONCRETE (See Note 6) | | |
| Round & Elliptical | 12" | 3" |
| CORRUGATED STEEL | | |
| 12"-30" Round | 18" [15"] | 12" [12"] |
| 36"-48" Round | 18" (12") [15"] | 12" (12") [12"] |
| 54"-72" Round | 18" (12") [15"] | 15" (12") [12"] |
| 78"-96" Round | (18") [27"] | (12") [12"] |
| 102" & Larger Round | 24" [33"] | 18" [21"] |
| 15"-30" Arch Equiv. | 18" [18"] | 12" [12"] |
| 36"-48" Arch Equiv. | 24" (12") [21"] | 18" (12") [15"] |
| 54"-72" Arch Equiv. | 30" (18") [24"] | 24" (12") [18"] |
| 78"-96" Arch Equiv. | (24") [27"] | (18") [21"] |
| 102" & Larger Arch Equiv. | (30") | (24") |
| CORRUGATED ALUMINUM | | |
| 12"-24" Round | 21" [21"] | 15" [15"] |
| 30"-48" Round | 24" (18") [21"] | 18" (12") [15"] |
| 54"-72" Round | 30" (24") [27"] | 24" (18") [21"] |
| 78"-102" Round | (30") [33"] | (24") [27"] |
| 108" & Larger | 36" | 30" |
| 15"-24" Arch Equiv. | 27" [24"] | 24" [21"] |
| 30"-48" Arch Equiv. | 33" (21") [27"] | 27" (15") [21"] |
| 54"-72" Arch Equiv. | 36" (24") [30"] | 30" (18") [24"] |
| 78"-90" Arch Equiv. | (30") [36"] | (24") [30"] |
| 96"-102" Arch Equiv. | (36") | (30") |
| CORRUGATED POLYETHYLENE | | |
| 15"-60" Round | 21" | 15" |
| POLYVINYL CHLORIDE | | |
| 15"-48" Round | 21" | 15" |

MINIMUM COVER FOR CONCRETE, STEEL, ALUMINUM, POLYETHYLENE AND POLYVINYL CHLORIDE PIPE



2008 FDOT Design Standards

COVER HEIGHT

| | |
|---------------|-----------|
| Last Revision | Sheet No. |
| 07/01/07 | 1 of 6 |
| Index No. | |
| 205 | |

| ROUND PIPE DIMENSIONS | | | | |
|-----------------------|----------------|---|-------|-------------------------------------|
| Equiv. Dia. (In.) | Area (Sq. Ft.) | Wall Thickness (In.)* CLASSES II, III, IV, V B WALL | | Wall Thickness (In.) Class III** |
| | | NRCP | SRCP | |
| 12 | 0.8 | 2 | 2 | 1.35 |
| 15 | 1.2 | 2 1/4 | 2 1/4 | 1.5 |
| 18 | 1.8 | 2 1/2 | 2 1/2 | 1.34 |
| 24 | 3.1 | 3 | 3 | 1.78 |
| 30 | 4.9 | 3 1/2 | 3 1/2 | 2.23 |
| 36 | 7.1 | 4 | 4 | 2.67 |
| 42 | 9.6 | — | 4 1/2 | — |
| 48 | 12.6 | — | 5 | — |
| 54 | 15.9 | — | 5 1/2 | — |
| 60 | 19.6 | — | 6 | — |
| 66 | 23.8 | — | 6 1/2 | — |
| 72 | 28.3 | — | 7 | — |
| 78 | 33.2 | — | 7 1/2 | — |
| 84 | 38.5 | — | 8 | — |
| 90 | 44.4 | — | 8 1/2 | — |
| 96 | 50.3 | — | 9 | — |
| 102 | 56.7 | — | 9 1/2 | — |
| 108 | 63.7 | — | 10 | — |
| 114 | 70.9 | — | — | — |
| 120 | 78.5 | — | — | — |

* For Informational Purposes Only.
Do Not Specify Wall Thickness.
Option B Wall Is Industry Standard.

**Wall Thickness Varies With Class Of Pipe.
Class III Wall Thickness Shown For
Informational Purposes Only.

| ELLIPTICAL PIPE DIMENSIONS | | | | | | |
|----------------------------|------------|------------|------------|-------------------|---------------|---|
| Nominal Dimensions | | | | Equiv. Dia. (In.) | Area (Sq.Ft.) | Wall Thickness (In.) Classes HE II, III, IV VE II, III, IV |
| Horiz. | | Vert. | | | | |
| Rise (In.) | Span (In.) | Rise (In.) | Span (In.) | | | |
| NA | NA | NA | NA | 12 | NA | NA |
| 12 | 18 | 18 | 12 | 15 | 1.3 | 2 1/2 |
| 14 | 23 | 23 | 14 | 18 | 1.8 | 2 3/4 |
| 19 | 30 | 30 | 19 | 24 | 3.3 | 3 1/4 |
| 24 | 38 | 38 | 24 | 30 | 5.1 | 3 3/4 |
| 29 | 45 | 45 | 29 | 36 | 7.4 | 4 1/2 |
| 34 | 53 | 53 | 34 | 42 | 10.2 | 5 |
| 38 | 60 | 60 | 38 | 48 | 12.9 | 5 1/2 |
| 43 | 68 | 68 | 43 | 54 | 16.6 | 6 |
| 48 | 76 | 76 | 48 | 60 | 20.5 | 6 1/2 |
| 53 | 83 | 83 | 53 | 66 | 24.8 | 7 |
| 58 | 91 | 91 | 58 | 72 | 29.5 | 7 1/2 |
| 63 | 98 | 98 | 63 | 78 | 34.6 | 8 |
| 68 | 106 | 106 | 68 | 84 | 40.1 | 8 1/2 |
| 72 | 113 | 113 | 72 | 90 | 46.1 | 9 |
| 77 | 121 | 121 | 77 | 96 | 52.4 | 9 1/2 |
| 82 | 128 | 128 | 82 | 102 | 59.2 | 10 |
| 87 | 136 | 136 | 87 | 108 | 66.4 | 10 1/2 |
| 92 | 143 | 143 | 92 | 114 | 74.0 | 11 |
| 97 | 151 | 151 | 97 | 120 | 82.0 | 11 1/2 |

For Informational Purposes Only

| ROUND PIPE INSTALLATIONS | | | | | | |
|--------------------------|---|---------|----------|-----------|----------|---------|
| PIPE DIAMETER | Maximum Height of Fill (ft.) | | | | | |
| | Class S | Class I | Class II | Class III | Class IV | Class V |
| 12"-30" | 9 | 13 | 17 | 24 | 36 | 55 |
| 36"-54" | 8 | 12 | 16 | 22 | 34 | 52 |
| 60"-78" | 7 | 11 | 15 | 21 | 33 | 51 |
| 84"-96" | 6 | 10 | 14 | 20 | 32 | 49 |
| Pipe Class S | D-Load=600 Lbs./Ft./Ft. (0.01" Crack) D-Load=900 Lbs./Ft./Ft. (Ultimate) | | | | | |
| Pipe Class I | D-Load=800 Lbs./Ft./Ft. (0.01" Crack) D-Load=1200 Lbs./Ft./Ft. (Ultimate) | | | | | |
| Pipe Class II | D-Load=1000 Lbs./Ft./Ft. (0.01" Crack) D-Load=1500 Lbs./Ft./Ft. (Ultimate) | | | | | |
| Pipe Class III | D-Load=1350 Lbs./Ft./Ft. (0.01" Crack) D-Load=2000 Lbs./Ft./Ft. (Ultimate) | | | | | |
| Pipe Class IV | D-Load=2000 Lbs./Ft./Ft. (0.01" Crack) D-Load=3000 Lbs./Ft./Ft. (Ultimate) | | | | | |
| Pipe Class V | D-Load=3000 Lbs./Ft./Ft. (0.01" Crack) D-Load=3750 Lbs./Ft./Ft. (Ultimate) | | | | | |

Note: At the option of the pipe supplier or the contractor, a Pipe Class with greater strength may be substituted for the Pipe Class designated in the plans.

| ELLIPTICAL PIPE INSTALLATIONS (All Sizes) | | | |
|--|------------------------------|--|---------------|
| Installation | Maximum Height Of Fill (Ft.) | Pipe Class | Bedding Class |
| Horizontal | 1-6* | HE II* | C |
| | 7-10 | HE III | C |
| | 11-16 | HE IV | C |
| | 17+ | Special Design | Modified |
| Vertical | 1-6* | VE II* | C |
| | 7-10 | VE III | C |
| | 11-16 | VE IV | C |
| | 17+ | Special Design | Modified |
| Pipe Class HE II | | D-Load=1000 Lbs./Ft./Ft. (0.01" Crack) And VE II D-Load=1500 Lbs./Ft./Ft. (Ultimate) | |
| Pipe Class HE III | | D-Load=1350 Lbs./Ft./Ft. (0.01" Crack) And VE III D-Load=2000 Lbs./Ft./Ft. (Ultimate) | |
| Pipe Class HE IV | | D-Load=2000 Lbs./Ft./Ft. (0.01" Crack) And VE IV D-Load=3000 Lbs./Ft./Ft. (Ultimate) | |

*Note: HE III and VE III pipe required for depths of cover less than 2' for 15", 18" and 24" equivalent.

PIPE DIMENSIONS CONCRETE PIPE

MAXIMUM COVER HEIGHTS CONCRETE PIPE

Note: Height of fill (maximum cover) is measured from top of finished grade to outside top of pipe.

| POLYETHYLENE PIPE | |
|-------------------|------------------------------|
| DIAMETER | HEIGHT OF MAXIMUM FILL (Ft.) |
| 12"-60" | 17' |

| POLYVINYL CHLORIDE PIPE | |
|-------------------------|------------------------------|
| DIAMETER | HEIGHT OF MAXIMUM FILL (Ft.) |
| 12"-48" | 17' |

MAXIMUM COVER FOR PLASTIC PIPE



Notes:

Increase the minimum cover values shown on Sheet 1 of 6 by 6" for gage and size combinations below the heavy lines.

Height of fill (maximum cover) is measured from top of finished grade to outside of pipe.

*Recorrugated end not available. May be considered for cross drain and side drain applications only.

NA-Not Available

NS-Not Suitable (For Highway H-20 or HS-20 Loadings)

① Limited availability of this product. Check availability before specifying (generally limited to 3" x 1" corrugation pipe arch fabricated from 60" and smaller diameter round pipe in 12 ga. and thicker material).

② 360° perforated pipe arch (french drain pipe) is not recommended. Do not specify without checking suitability and availability.

③ 5" x 1" corrugated pipe is currently not manufactured for the Florida market. Check availability before specifying.

④ 0.109 in. (12 gage) for spiral rib, 8' maximum cover, 3/4" x 1" x 1 1/2" rib spacing (2 rib) only.

| ROUND PIPE - 2 3/8" x 1/2" CORRUGATION | | | | | | | |
|--|----------------|----------------------------------|------------|------------|------------|-----------|------------------|
| D (In.) | Area (Sq. Ft.) | Maximum Height Of Fill (Ft.) | | | | | Min. Cover (Ft.) |
| | | Sheet Thickness In Inches (Gage) | | | | | |
| | | 0.064 (16) | 0.079 (14) | 0.109 (12) | 0.138 (10) | 0.168 (8) | |
| 12 | 0.79 | 100+ | 100+ | NA | NA | NA | See Sheet 1 of 6 |
| 15 | 1.23 | 100+ | 100+ | NA | NA | NA | |
| 18 | 1.77 | 100+ | 100+ | 100+ | NA | NA | |
| 21 | 2.40 | 100+ | 100+ | 100+ | NA | NA | |
| 24 | 3.14 | 100+ | 100+ | 100+ | NA | NA | |
| 30 | 4.91 | 85 | 100+ | 100+ | NA | NA | |
| 36 | 7.1 | 71+ | 88 | 100+ | 100+ | NA | |
| 42 | 9.6 | 60+ | 76 | 100+ | 100+ | NA | |
| 48 | 12.6 | 53 | 66 | 93 | 100+ | 100+* | |
| 54 | 16.0 | NS | 59 | 82 | 100+ | 100+* | |
| 60 | 19.6 | NS | NS | 74 | 95 | 100+* | |
| 66 | 23.8 | NS | NS | NS | 87 | 100+* | |
| 72 | 28.3 | NS | NS | NS | 79 | 97* | |
| 78 | 33.2 | NS | NS | NS | NS | 90* | |
| 84 | 38.5 | NS | NS | NS | NS | 83* | |

| ROUND PIPE - 3" x 1" CORRUGATION | | | | | | | |
|----------------------------------|----------------|----------------------------------|------------|------------|------------|-----------|------------------|
| D (In.) | Area (Sq. Ft.) | Maximum Height Of Fill (Ft.) | | | | | Min. Cover (Ft.) |
| | | Sheet Thickness In Inches (Gage) | | | | | |
| | | 0.064 (16) | 0.079 (14) | 0.109 (12) | 0.138 (10) | 0.168 (8) | |
| 36 | 7.1 | 81 | 100+ | 100+ | NA | NA | See Sheet 1 of 6 |
| 42 | 9.6 | 70 | 87 | 100+ | NA | NA | |
| 48 | 12.6 | 61 | 76 | 100+ | 100+ | NA | |
| 54 | 16.0 | 54 | 68 | 95 | 100+ | NA | |
| 60 | 19.6 | 48 | 61 | 85 | 100+ | NA | |
| 66 | 23.8 | 44 | 55 | 78 | 100 | 100+* | |
| 72 | 28.3 | 40 | 51 | 71 | 91 | 100+* | |
| 78 | 33.2 | 37 | 47 | 66 | 84 | 100+* | |
| 84 | 38.5 | 35 | 43 | 61 | 78 | 100+* | |
| 90 | 44.2 | 32 | 40 | 57 | 73 | 90* | |
| 96 | 50.3 | NS | 38 | 53 | 68 | 84* | |
| 102 | 56.7 | NS | 36 | 50 | 64 | 79* | |
| 108 | 63.6 | NS | NS | 47 | 61 | 75* | |
| 114 | 70.9 | NS | NS | 45 | 58 | 71* | |
| 120 | 78.5 | NS | NS | 42 | 55 | 67* | |
| 132 | 95.0 | NS | NS | NS | 50 | 61* | |

| ROUND PIPE - 5" x 1" CORRUGATION ③ | | | | | | | |
|------------------------------------|----------------|----------------------------------|------------|------------|------------|-----------|------------------|
| D (In.) | Area (Sq. Ft.) | Maximum Height Of Fill (Ft.) | | | | | Min. Cover (Ft.) |
| | | Sheet Thickness In Inches (Gage) | | | | | |
| | | 0.064 (16) | 0.079 (14) | 0.109 (12) | 0.138 (10) | 0.168 (8) | |
| 36 | 7.1 | 72 | 90 | 100+ | NA | NA | See Sheet 1 of 6 |
| 42 | 9.6 | 62 | 77 | 100+ | NA | NA | |
| 48 | 12.6 | 54 | 68 | 95 | 100+ | NA | |
| 54 | 16.0 | 48 | 60 | 84 | 100+ | NA | |
| 60 | 19.6 | 43 | 54 | 76 | 98 | NA | |
| 66 | 23.8 | 39 | 49 | 69 | 89 | 100+* | |
| 72 | 28.3 | 36 | 45 | 63 | 81 | 100* | |
| 78 | 33.2 | 33 | 41 | 58 | 75 | 92* | |
| 84 | 38.5 | 31 | 38 | 54 | 70 | 85* | |
| 90 | 44.2 | 29 | 36 | 50 | 65 | 80* | |
| 96 | 50.3 | NS | 34 | 47 | 61 | 75* | |
| 102 | 56.7 | NS | 32 | 44 | 57 | 70* | |
| 108 | 63.6 | NS | NS | 42 | 54 | 66* | |
| 114 | 70.9 | NS | NS | 40 | 51 | 63* | |
| 120 | 78.5 | NS | NS | 38 | 49 | 60* | |
| 132 | 95.0 | NS | NS | NS | 44 | 54* | |

| PIPE ARCH: SPIRAL RIB: 3/4" x 3/4" x 7 1/2" RIB SPACING PIPE ARCH: SPIRAL RIB: 3/4" x 1" x 1 1/2" RIB SPACING PIPE ARCH - 2 3/8" x 1/2" CORRUGATION | | | | | | | |
|---|------------|-------------------------|----------------|--|--------------------------------------|------|------------------|
| Span (In.) | Rise (In.) | Equiv. Round Pipe (In.) | Area (Sq. Ft.) | Minimum Sheet Thickness Required (In.) (Ga.) | Maximum Height Of Fill (Ft.) | | Min. Cover (Ft.) |
| | | | | | Maximum Corner Pressure Lbs./Sq. Ft. | | |
| | | | | | 4000 | 6000 | |
| 17 | 13 | 15 | 1.1 | 0.064 (16) | 12 | 14 | See Sheet 1 of 6 |
| 21 | 15 | 18 | 1.6 | 0.064 (16) | 10 | 14 | |
| 24 | 18 | 21 | 2.2 | 0.064 (16) | 7 | 13 | |
| 28 | 20 | 24 | 2.9 | 0.064 (16) | 5 | 11 | |
| 35 | 24 | 30 | 4.5 | 0.064 (16) | NS | 7 | |
| 42 | 29 | 36 | 6.5 | 0.064 (16) | NS | 7 | |
| 49 | 33 | 42 | 8.9 | 0.079 (14) | NS | 6 | |
| 57 | 38 | 48 | 11.6 | 0.109 (12) | NS | 8 | |
| 64 | 43 | 54 | 14.7 | 0.109 (12) | NS | 9 | |
| 71 | 47 | 60 | 18.1 | 0.138 (10) ④ | NS | 10 ④ | |
| 77 | 52 | 66 | 21.9 | 0.168 (8)* ④ | 5 | 10 ④ | |
| 83 | 57 | 72 | 26.0 | 0.168 (8)* ④ | 5 | 10 ④ | |

| PIPE ARCH-3" x 1" ①②③ and 5" x 1" ②③ CORR. | | | | | | | | |
|--|------------|-------------------------|----------------|--|--------------------------------------|------|------------------|--|
| Span (In.) | Rise (In.) | Equiv. Round Pipe (In.) | Area (Sq. Ft.) | Minimum Sheet Thickness Required (In.) (Ga.) | Maximum Height Of Fill (Ft.) | | Min. Cover (Ft.) | |
| | | | | | Maximum Corner Pressure Lbs./Sq. Ft. | | | |
| | | | | | 4000 | 6000 | | |
| 40 | 31 | 36 | 7.0 | 0.079 (14) | 8 | 12 | See Sheet 1 of 6 | |
| 46 | 36 | 42 | 9.4 | 0.079 (14) | 8 | 13 | | |
| 53 | 41 | 48 | 12.3 | 0.079 (14) | 8 | 13 | | |
| 60 | 46 | 54 | 15.6 | 0.079 (14) | 8 | 13 | | |
| 66 | 51 | 60 | 19.3 | 0.079 (14) | 9 | 13 | | |
| 73 | 55 | 66 | 23.2 | 0.079 (14) | 11 | 16 | | |
| 81 | 59 | 72 | 27.4 | 0.079 (14) | 11 | 17 | | |
| 87 | 63 | 78 | 32.1 | 0.079 (14) | 10 | 16 | | |
| 95 | 67 | 84 | 37.0 | 0.079 (14) | 11 | 17 | | |
| 103 | 71 | 90 | 42.4 | 0.109 (12) | 10 | 15 | | |
| 112 | 75 | 96 | 48.0 | 0.109 (12) | 10 | 16 | | |
| 117 | 79 | 102 | 54.2 | 0.109 (12) | 10 | 15 | | |
| 128 | 83 | 108 | 60.5 | 0.138 (10) | 9 | 14 | | |
| 137 | 87 | 114 | 67.4 | 0.138 (10) | 8 | 13 | | |
| 142 | 91 | 120 | 74.5 | 0.168 (8) | 7 | 12 | | |

| ROUND PIPE - SPIRAL RIB RIB SPACING (3/4" x 3/4" x 7 1/2") or (3/4" x 1" x 1 1/2") | | | | | | | |
|--|----------------|----------------------------------|------------|------------|------------|-----------|------------------|
| D (In.) | Area (Sq. Ft.) | Maximum Height Of Fill (Ft.) | | | | | Min. Cover (Ft.) |
| | | Sheet Thickness In Inches (Gage) | | | | | |
| | | 0.064 (16) | 0.079 (14) | 0.109 (12) | 0.138 (10) | 0.168 (8) | |
| 12 | 0.79 | NA | NA | NA | NA | NA | See Sheet 1 of 6 |
| 15 | 1.23 | NA | NA | NA | NA | NA | |
| 18 | 1.77 | 68 | 72 | NA | NA | NA | |
| 21 | 2.40 | 58 | 62 | 100+ | NA | NA | |
| 24 | 3.14 | 51 | 72 | 100+ | NA | NA | |
| 30 | 4.91 | 41 | 58 | 97 | NA | NA | |
| 36 | 7.1 | 34 | 48 | 81 | NA | NA | |
| 42 | 9.6 | 29 | 41 | 69 | NA | NA | |
| 48 | 12.6 | 26 | 36 | 61 | NA | NA | |
| 54 | 16.0 | 23 | 32 | 54 | NA | NA | |
| 60 | 19.6 | NS | 29 | 49 | NA | NA | |
| 66 | 23.8 | NS | 26 | 44 | NA | NA | |
| 72 | 28.3 | NS | 24 | 40 | NA | NA | |
| 78 | 33.2 | NS | NS | 37 | NA | NA | |
| 84 | 38.5 | NS | NS | 35 | NA | NA | |
| 90 | 44.2 | NS | NS | 32 | NA | NA | |
| 96 | 50.3 | NS | NS | 30 | NA | NA | |
| 102 | 56.7 | NS | NS | 29 | NA | NA | |
| 108 | 63.6 | NS | NS | 27ⓐ | NA | NA | |

ⓐ = 3/4" x 1" x 1 1/2" Only

MAXIMUM COVER FOR CORRUGATED STEEL PIPE ROUND AND PIPE ARCH



2008 FDOT Design Standards

COVER HEIGHT

Last Revision 07/01/07 Sheet No. 3 of 6

Index No. 205

| ROUND PIPE - 2 2/3" x 1/2" CORRUGATION | | | | | | | |
|--|----------------|----------------------------------|------------|------------|------------|-----------|------------------|
| D (In.) | Area (Sq. Ft.) | Maximum Height Of Fill (Ft.) | | | | | Min. Cover (Ft.) |
| | | Sheet Thickness In Inches (Gage) | | | | | |
| | | 0.060 (16) | 0.075 (14) | 0.105 (12) | 0.135 (10) | 0.164 (8) | |
| 12 | 0.8 | 90 | 100+ | NA | NA | NA | See Sheet 1 of 6 |
| 15 | 1.2 | 72 | 90 | NA | NA | NA | |
| 18 | 1.8 | 59 | 75 | 100+ | NA | NA | |
| 21 | 2.4 | 52 | 65 | 92 | NA | NA | |
| 24 | 3.1 | 44 | 56 | 79 | NA | NA | |
| 30 | 4.9 | 35 DR | 44 | 63 | NA | NA | |
| 36 | 7.1 | NS | 36 DR | 52 | 68 | NA | |
| 42 | 9.6 | NS | NS | 44 DR | 58 | NA | |
| 48 | 12.6 | NS | NS | 38 DR | 50 DR | 61 | |
| 54 | 15.9 | NS | NS | 34 DR | 45 DR | 54 DR | |
| 60 | 19.6 | NS | NS | NS | 39 DR | 49 DR | |
| 66 | 23.8 | NS | NS | NS | NS | 44 DR | |
| 72 | 28.3 | NS | NS | NS | NS | 40 DR | |

| ROUND PIPE - 3" x 1" CORRUGATION | | | | | | | |
|----------------------------------|----------------|----------------------------------|------------|------------|------------|-----------|------------------|
| D (In.) | Area (Sq. Ft.) | Maximum Height Of Fill (Ft.) | | | | | Min. Cover (Ft.) |
| | | Sheet Thickness In Inches (Gage) | | | | | |
| | | 0.060 (16) | 0.075 (14) | 0.105 (12) | 0.135 (10) | 0.164 (8) | |
| 36 | 7.1 | 33 | 42 | 60 | NA | NA | See Sheet 1 of 6 |
| 42 | 9.6 | 28 | 36 | 51 | NA | NA | |
| 48 | 12.6 | 24 | 31 | 45 | 58 | NA | |
| 54 | 15.9 | 21 | 28 | 39 | 51 | NA | |
| 60 | 19.6 | 19 | 24 | 35 | 46 | NA | |
| 66 | 23.8 | 15DR | 22 | 32 | 42 | 51 | |
| 72 | 28.3 | NS | 20DR | 29 | 38 | 47 | |
| 78 | 33.2 | NS | 15DR | 27 | 35 | 43 | |
| 84 | 38.5 | NS | NS | 24DR | 32 | 40 | |
| 90 | 44.2 | NS | NS | 23DR | 30 | 37 | |
| 96 | 50.3 | NS | NS | 21DR | 28DR | 34 | |
| 102 | 56.7 | NS | NS | NS | 26DR | 32 | |
| 108 | 63.6 | NS | NS | NS | 24DR | 30DR | |
| 114 | 70.9 | NS | NS | NS | NS | 28DR | |
| 120 | 78.5 | NS | NS | NS | NS | 27DR | |

| ROUND PIPE - SPIRAL RIB RIB SPACING (3/4" x 3/4" x 7 1/2") | | | | | | | |
|---|----------------|----------------------------------|------------|------------|------------|-----------|------------------|
| D (In.) | Area (Sq. Ft.) | Maximum Height Of Fill (Ft.) | | | | | Min. Cover (Ft.) |
| | | Sheet Thickness In Inches (Gage) | | | | | |
| | | 0.060 (16) | 0.075 (14) | 0.105 (12) | 0.135 (10) | 0.164 (8) | |
| 12 | 0.79 | NA | NA | NA | NA | NA | See Sheet 1 of 6 |
| 15 | 1.23 | 63 ① | 87 ① | NA | NA | NA | |
| 18 | 1.77 | 55 | 76 | NA | NA | NA | |
| 21 | 2.40 | 47 | 65 | NA | NA | NA | |
| 24 | 3.14 | 41 | 57 | NA | NA | NA | |
| 30 | 4.91 | 33 DR | 45 | 73 | NA | NA | |
| 36 | 7.1 | NS | 38 DR | 61 | NA | NA | |
| 42 | 9.6 | NS | NS | 52 | NA | NA | |
| 48 | 12.6 | NS | NS | 46 | 65 | NA | |
| 54 | 16.0 | NS | NS | 40 DR | 57 | NA | |
| 60 | 19.6 | NS | NS | NS | 52 | NA | |
| 66 | 23.8 | NS | NS | NS | 47 DR | NA | |
| 72 | 28.3 | NS | NS | NS | NS | NA | |
| 78 | 33.2 | NS | NS | NS | NS | NA | |
| 84 | 38.5 | NS | NS | NS | NS | NA | |
| 90 | 44.2 | NS | NS | NS | NS | NA | |
| 96 | 50.3 | NS | NS | NS | NS | NA | |

■ - Note:
Special installation required. Refer to AASHTO Standard Specifications for Highway Bridges or ASTM B788-88 and manufacturer's recommendations.

| PIPE ARCH - 2 2/3" x 1/2" CORRUGATION ② | | | | | | | |
|---|------------|-------------------------|----------------|--|-------------------------------------|------|------------------|
| Span (In.) | Rise (In.) | Equiv. Round Pipe (In.) | Area (Sq. Ft.) | Minimum Sheet Thickness Required (In.) (Ga.) | Maximum Height Of Fill (Ft.) | | Min. Cover (Ft.) |
| | | | | | Maximum Corner Pressure-Lbs./Sq.Ft. | | |
| | | | | | 4000 | 6000 | |
| 17 | 13 | 15 | 1.1 | 0.060 (16) | 12 | 15 | See Sheet 1 of 6 |
| 21 | 15 | 18 | 1.6 | 0.060 (16) | 10 | 14 | |
| 24 | 18 | 21 | 2.2 | 0.060 (16) | 7 | 13 | |
| 28 | 20 | 24 | 2.9 | 0.075 (14) | 5 | 11 | |
| 35 | 24 | 30 | 4.5 | 0.075 (14) | NS | 7 | |
| 42 | 29 | 36 | 6.5 | 0.105 (12) | NS | 7 | |
| 49 | 33 | 42 | 8.9 | 0.105 (12) | NS | 6 | |
| 57 | 38 | 48 | 11.6 | 0.135 (10) | NS | 8 | |
| 64 | 43 | 54 | 14.7 | 0.135 (10) | NS | 9 | |
| 71 | 47 | 60 | 18.1 | 0.164 (8) | NS | 10 | |
| 77 | 52 | 66 | 21.9 | 0.164 (8) | NS | 10 | |
| 83 | 57 | 72 | 26.0 | 0.164 (8) | NS | 10 | |

| PIPE ARCH - 3" x 1" CORRUGATION ①② | | | | | | | |
|------------------------------------|------------|-------------------------|----------------|--|-------------------------------------|------|------------------|
| Span (In.) | Rise (In.) | Equiv. Round Pipe (In.) | Area (Sq. Ft.) | Minimum Sheet Thickness Required (In.) (Ga.) | Maximum Height Of Fill (Ft.) | | Min. Cover (Ft.) |
| | | | | | Maximum Corner Pressure-Lbs./Sq.Ft. | | |
| | | | | | 4000 | 6000 | |
| 40 | 31 | 36 | 7.0 | 0.060 (16) | 8 | 12 | See Sheet 1 of 6 |
| 46 | 36 | 42 | 9.4 | 0.060 (16) | 8 | 13 | |
| 53 | 41 | 48 | 12.3 | 0.060 (16) | 8 | 13 | |
| 60 | 46 | 54 | 15.6 | 0.075 (14) | 8 | 13 | |
| 66 | 51 | 60 | 19.3 | 0.075 (14) | 8 | 13 | |
| 73 | 55 | 66 | 23.2 | 0.105 (12) | 11 | 16 | |
| 81 | 59 | 72 | 27.4 | 0.105 (12) | 11 | 17 | |
| 87 | 63 | 78 | 32.1 | 0.105 (12) | 10 | 16 | |
| 95 | 67 | 84 | 37.0 | 0.105 (12) | 11 | 17 | |
| 103 | 71 | 90 | 42.4 | 0.135 (10) | 10 | 15 | |
| 112 | 75 | 96 | 48.0 | 0.135 (10) | 10 | 16 | |
| 117 | 79 | 102 | 54.2 | 0.164 (8) | 10 | 15 | |

| PIPE ARCH - SPIRAL RIB RIB SPACING (3/4" x 3/4" x 7 1/2") | | | | | | | |
|--|------------|-------------------------|----------------|--|-------------------------------------|------|------------------|
| Span (In.) | Rise (In.) | Equiv. Round Pipe (In.) | Area (Sq. Ft.) | Minimum Sheet Thickness Required (In.) (Ga.) | Maximum Height Of Fill (Ft.) | | Min. Cover (Ft.) |
| | | | | | Maximum Corner Pressure-Lbs./Sq.Ft. | | |
| | | | | | 4000 | 6000 | |
| 16 | 14 | 15 | 1.2 | 0.060 (16) | 12 | 13 | See Sheet 1 of 6 |
| 20 | 16 | 18 | 1.7 | 0.060 (16) | 10 | 12 | |
| 23 | 19 | 21 | 2.3 | 0.060 (16) | 7 | 11 | |
| 27 | 21 | 24 | 3.0 | 0.060 (16) | 5 | 10 | |
| 33 | 26 | 30 | 4.7 | 0.075 (14) | NS | 9 | |
| 40 | 31 | 36 | 7.0 | 0.075 (14) | NS | 8 | |
| 46 | 36 | 42 | 9.4 | 0.105 (12) | NS | 8 | |
| 53 | 41 | 48 | 12.3 | 0.105 (12) | NS | 8 | |
| 60 | 46 | 54 | 15.6 | 0.105 (10) | NS | 8 | |
| 66 | 51 | 60 | 19.3 | 0.135 (10) | NS | 8 | |
| 73 | 55 | 66 | 23.2 | NS | NS | 8 | |
| 81 | 59 | 72 | 27.4 | NS | NS | 8 | |

MAXIMUM COVER FOR CORRUGATED ALUMINUM ALLOY ROUND PIPE AND PIPE ARCH

Notes:

Increase the minimum cover values shown on Sheet 1 of 6 by 6" for gage and size combinations below the heavy lines.

Height of fill (maximum cover) is measured from top of finished grade to outside top of pipe.

NA-Not Available

NS-Not Suitable (For Highway H-20 or HS-20 Loadings)

DR-Design Review is recommended for each specific application. The review should identify any special handling, installation, backfill procedures, and construction load restrictions which may be required. (The review performed by the designer does not relieve the contractor from analyzing and taking any necessary precautions required to protect partially or completely constructed pipe from the equipment used during construction.) (NOTE: The DESIGNER may use a thicker gage in lieu of the Design Review.)

- ① Limited availability of this product. Check availability before specifying.
- ② 360° perforated pipe (french drain pipe) is not recommended in the pipe arch shape. Do not specify without checking both for suitability and availability.
- ③ This size and gage combination must be strutted during installation per manufacturer's recommendations. Extra care will be required during handling and installation.
- ④ Use of this size and gage combination must be approved by the State Drainage Engineer.



Aluminum Structural Plate
Height of Cover Limits*
Combination Metal Thickness, Reinforcing Rib Type, and Rib Spacing
Arch Shape- HS 20 Live Load

| | | | Minimum Height of Cover (Ft.) | | | | | |
|----------------|----------------|---------------|-------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Span (Ft.-In.) | Rise (Ft.-In.) | Area (Sq.Ft.) | 1.00 | 1.50 | 2.00 | 2.50 | 3.00 | 3.50 |
| 5-0 | 1-9 | 7 | 0.125 (45) | 0.100 (31) | 0.100 (31) | 0.100 (31) | 0.100 (31) | 0.100 (31) |
| | 2-3 | 9 | | | | | | |
| | 2-7 | 10 | | | | | | |
| 6-0 | 1-10 | 8 | 0.125-II-18 (37) | 0.100 (25) | 0.100 (25) | 0.100 (25) | 0.100 (25) | 0.100 (25) |
| | 2-4 | 10 | | | | | | |
| | 2-9 | 13 | | | | | | |
| 7-0 | 3-2 | 15 | 0.125-II-18 (32) | 0.100 (22) | 0.100 (22) | 0.100 (22) | 0.100 (22) | 0.100 (22) |
| | 2-4 | 12 | | | | | | |
| | 2-10 | 15 | | | | | | |
| 8-0 | 3-3 | 18 | 0.125-II-9 (28) | 0.150 (37) | 0.100 (19) | 0.100 (19) | 0.100 (19) | 0.100 (19) |
| | 3-8 | 20 | | | | | | |
| | 2-11 | 17 | | | | | | |
| 9-0 | 3-4 | 20 | 0.125-IV-9 (25) | 0.125-II-18 (25) | 0.100 (17) | 0.100 (17) | 0.100 (17) | 0.100 (17) |
| | 4-2 | 26 | | | | | | |
| | 2-11 | 19 | | | | | | |
| 10-0 | 3-10 | 26 | 0.125-IV-9 (22) | 0.125-II-18 (22) | 0.125 (22) | 0.100 (15) | 0.100 (15) | 0.100 (15) |
| | 4-8 | 33 | | | | | | |
| | 3-6 | 25 | | | | | | |
| 11-0 | 4-5 | 33 | 0.175-IV-9 (32) | 0.125-II-18 (20) | 0.125-II-27 (20) | 0.100 (14) | 0.100 (14) | 0.100 (14) |
| | 5-2 | 41 | | | | | | |
| | 4-6 | 28 | | | | | | |
| 12-0 | 5-8 | 50 | 0.125-IV-18 (18) | 0.125-II-27 (18) | 0.125 (18) | 0.100 (12) | 0.100 (12) | 0.100 (12) |
| | 4-1 | 35 | | | | | | |
| | 5-0 | 45 | | | | | | |
| 13-0 | 6-3 | 59 | 0.150-IV-18 (23) | 0.125-II-27 (17) | 0.150 (23) | 0.100 (11) | 0.100 (11) | 0.100 (11) |
| | 4-1 | 38 | | | | | | |
| | 5-1 | 49 | | | | | | |
| 14-0 | 5-11 | 59 | 0.125-IV-9 (16) | 0.125-IV-27 (16) | 0.125-II-27 (16) | 0.100 (11) | 0.100 (11) | 0.100 (11) |
| | 6-9 | 70 | | | | | | |
| | 4-8 | 47 | | | | | | |
| 15-0 | 7-3 | 81 | 0.125-IV-9 (15) | 0.125-IV-27 (15) | 0.125-II-27 (15) | 0.125 (15) | 0.125 (15) | 0.125 (15) |
| | 5-7 | 58 | | | | | | |
| | 6-5 | 70 | | | | | | |
| 16-0 | 7-9 | 93 | 0.150-IV-9 (18) | 0.125-IV-18 (14) | 0.125-II-27 (14) | 0.150 (18) | 0.125 (14) | 0.125 (14) |
| | 4-8 | 50 | | | | | | |
| | 5-8 | 63 | | | | | | |
| 17-0 | 6-7 | 75 | 0.225-IV-9 (27) | 0.150-IV-18 (17) | 0.125-II-27 (13) | 0.175 (20) | 0.150 (17) | 0.150 (17) |
| | 7-5 | 87 | | | | | | |
| | 7-9 | 93 | | | | | | |
| 18-0 | 8-3 | 105 | 0.175-IV-18 (19) | 0.125-IV-27 (12) | 0.200 (22) | 0.175 (19) | 0.175 (19) | 0.175 (19) |
| | 5-3 | 60 | | | | | | |
| | 6-2 | 73 | | | | | | |
| 19-0 | 7-1 | 86 | 0.125-IV-9 (11) | 0.125-IV-27 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) |
| | 7-11 | 99 | | | | | | |
| | 8-3 | 105 | | | | | | |
| 17-0 | 8-10 | 119 | 0.125-IV-9 (11) | 0.125-IV-27 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) |
| | 5-3 | 64 | | | | | | |
| | 6-3 | 78 | | | | | | |
| 18-0 | 7-2 | 92 | 0.125-IV-9 (11) | 0.125-IV-27 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) |
| | 8-0 | 105 | | | | | | |
| | 8-10 | 119 | | | | | | |
| 19-0 | 8-11 | 126 | 0.125-IV-9 (11) | 0.125-IV-27 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) |
| | 5-9 | 75 | | | | | | |
| | 6-9 | 90 | | | | | | |
| 19-0 | 7-8 | 105 | 0.125-IV-9 (11) | 0.125-IV-27 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) |
| | 8-6 | 119 | | | | | | |
| | 8-11 | 126 | | | | | | |
| 19-0 | 6-4 | 87 | 0.125-IV-9 (11) | 0.125-IV-27 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) |
| | 7-4 | 103 | | | | | | |
| | 8-2 | 118 | | | | | | |
| 19-0 | 9-0 | 133 | 0.125-IV-9 (11) | 0.125-IV-27 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) | 0.125-IV-54 (11) |
| | 9-5 | 141 | | | | | | |
| | 9-5 | 141 | | | | | | |

Aluminum Structural Plate
Height of Cover Limits*
Combination Metal Thickness, Reinforcing Rib Type, and Rib Spacing
Round Shape- HS 20 Live Load

| | | Minimum Height of Cover (Ft.) | | | | | |
|--------------------|----------------|-------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Diameter (Ft.-In.) | Area (Sq. Ft.) | 1.00 | 1.50 | 2.00 | 2.50 | 3.00 | 3.50 |
| 5-0 | 19 | 0.125 (45) | 0.100 (31) | 0.100 (31) | 0.100 (31) | 0.100 (31) | 0.100 (31) |
| 5-6 | 23 | 0.125-II-18 (37) | 0.100 (25) | 0.100 (25) | 0.100 (25) | 0.100 (25) | 0.100 (25) |
| 6-0 | 28 | 0.125-II-18 (32) | 0.100 (22) | 0.100 (22) | 0.100 (22) | 0.100 (22) | 0.100 (22) |
| 6-6 | 32 | 0.125-II-9 (28) | 0.150 (37) | 0.100 (19) | 0.100 (19) | 0.100 (19) | 0.100 (19) |
| 7-0 | 38 | 0.125-II-9 (25) | 0.125-II-18 (25) | 0.100 (17) | 0.100 (17) | 0.100 (17) | 0.100 (17) |
| 7-6 | 44 | 0.125-IV-9 (22) | 0.125-II-18 (22) | 0.125 (22) | 0.100 (15) | 0.100 (15) | 0.100 (15) |
| 8-0 | 50 | 0.175-IV-9 (32) | 0.125-II-18 (20) | 0.125-II-27 (20) | 0.100 (14) | 0.100 (14) | 0.100 (14) |
| 8-6 | 56 | | 0.125-IV-18 (18) | 0.125-II-27 (18) | 0.125 (18) | 0.100 (12) | 0.100 (12) |
| 9-0 | 63 | | 0.150-IV-18 (23) | 0.125-II-27 (17) | 0.150 (23) | 0.125 (17) | 0.125 (17) |
| 9-6 | 71 | | 0.125-IV-9 (16) | 0.125-IV-27 (16) | 0.125-II-27 (16) | 0.150 (21) | 0.150 (21) |
| 10-0 | 79 | | 0.125-II-54 (15) | 0.125-IV-9 (15) | 0.125-IV-27 (15) | 0.125-II-27 (15) | 0.125-II-54 (15) |
| 10-6 | 87 | | 0.150-IV-9 (18) | 0.125-IV-18 (14) | 0.125-II-27 (14) | 0.150-II-54 (18) | 0.150-II-54 (18) |
| 11-0 | 95 | | 0.225-IV-9 (27) | 0.150-IV-18 (17) | 0.150-II-27 (17) | 0.150-II-27 (17) | 0.150-II-27 (17) |
| 11-6 | 104 | | | 0.175-IV-18 (19) | 0.175-II-27 (19) | 0.175-II-27 (19) | 0.175-II-27 (19) |
| 12-0 | 114 | | | 0.175-IV-9 (18) | 0.175-IV-27 (18) | 0.175-II-27 (18) | 0.175-II-27 (18) |
| 12-6 | 124 | | | 0.200-IV-9 (20) | 0.200-IV-27 (20) | 0.200-II-27 (20) | 0.200-II-27 (20) |
| 13-0 | 134 | | | | | | |
| 13-6 | 145 | | | | | | |
| 14-0 | 156 | | | | | | |
| 14-6 | 167 | | | | | | |
| 15-0 | 179 | | | | | | |
| 15-6 | 191 | | | | | | |
| 16-0 | 204 | | | | | | |
| 16-6 | 217 | | | | | | |
| 17-0 | 231 | | | | | | |
| 17-6 | 245 | | | | | | |
| 18-0 | 259 | | | | | | |
| 18-6 | 274 | | | | | | |
| 19-0 | 289 | | | | | | |
| 19-6 | 305 | | | | | | |

* Number in () below combination indicates maximum cover for the given combination plate thickness, rib type and rib spacing. All maximum cover depths are given in feet. (See Note Number 2 Under Structural Plate Notes Sheet 6 of 6).

MINIMUM AND MAXIMUM COVER FOR ALUMINUM STRUCTURAL PLATE



2008 FDOT Design Standards

COVER HEIGHT

| | |
|---------------|-----------|
| Last Revision | Sheet No. |
| 07/01/07 | 5 of 6 |
| Index No. | |
| 205 | |

**Aluminum Structural Plate
Height of Cover Limits***
Combination Metal Thickness, Reinforcing Rib Type, and Rib Spacing
Underpass Shape- HS 20 Live Load

| Span (Ft.-In.) | Rise (Ft.-In.) | Area (Sq.Ft.) | Minimum Height of Cover (Ft.) | | | | | |
|--|---|----------------------------------|-------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| | | | 1.00 | 1.50 | 2.00 | 2.50 | 3.00 | 3.50 |
| 6-1 | 5-9 | 28 | 0.125-II-18 (29) | 0.100 (25) | 0.100 (25) | 0.100 (25) | 0.100 (25) | 0.100 (25) |
| 6-3 6-3 6-2 6-4 6-3 6-5 | 6-1 6-5 6-11 7-3 7-9 8-1 | 30 32 34 37 39 42 | 0.125-II-18 (25) | 0.100 (22) | 0.100 (22) | 0.100 (22) | 0.100 (22) | 0.100 (22) |
| 12-1 | 11-0 | 106 | | 0.125-IV-18 (14) | 0.125-II-27 (14) | 0.125 (14) | 0.100 (12) | 0.100 (12) |
| 12-10 13-0 | 11-2 12-0 | 114 124 | | 0.150-IV-18 (13) | 0.125-II-27 (13) | 0.150 (13) | 0.125 (13) | 0.125 (13) |
| 13-8 14-0 | 12-4 12-11 | 133 143 | | 0.125-IV-9 (12) | 0.125-IV-27 (12) | 0.125-II-27 (12) | 0.125-II-54 (12) | 0.125-II-54 (12) |
| 14-6 14-8 | 13-5 14-1 | 155 165 | | 0.125-IV-9 (11) | 0.125-IV-27 (11) | 0.125-II-27 (11) | 0.125-II-54 (11) | 0.125-II-54 (11) |
| 15-5 15-6 | 14-5 15-2 | 177 190 | | 0.150-IV-9 (11) | 0.125-IV-18 (11) | 0.125-II-27 (11) | 0.125-II-27 (11) | 0.125-II-2 (11) |
| 16-2 16-6 16-8 | 15-6 16-0 16-4 | 200 208 215 | | 0.225-IV-9 (10) | 0.150-IV-18 (10) | 0.150-II-27 (10) | 0.150-II-27 (10) | 0.150-II-27 (10) |

ALUMINUM STRUCTURAL PLATE NOTES

- Allowable cover (minimum & maximum) is measured from the outside valley of crown plate to the bottom of flexible pavement or from the outside valley of the crown plate to the top of rigid pavement. Minimum cover must be maintained in unpaved areas. Maximum cover is measured at the highest fill and/or the highest pavement elevation.
- To find the minimum material requirements for the aluminum structural plate structure:
 - Select the span in the left hand column that is equal to or larger than structure size required.
 - Select the cover in the top row that is equal to or smaller than that required for the site.
 - Intersect appropriate span and cover to find the appropriate plate. Example: Round Pipe, Span= 17'-0", Height of Cover= 2'-7" (use 2.5 ft. in table). Ans: 0.150-II-27 (17)
The table selections show metal thickness, rib type, rib spacing and maximum cover. Example: 0.150-II-27=0.150" thick plate structure with Type II rib at 27" on centers on the crown. Number (17) in parenthesis below combination indicates maximum cover in feet for the given combination of plate thickness, rib type, and rib spacing.
- Arch shapes shown are single radius and have a rise-to-span ratio of 0.30 to 0.53. Structures with rise-to-span ratios of less than 0.30 are typically not used because of structural considerations.
- Tables based on HS 20 wheelloads.

DESIGN NOTES

- The plans must call out size, metal thickness, reinforcing rib type and rib spacing.
- Pipe-arch and underpass shapes will generate high corner bearing pressures against the sidefill and foundation. The height of cover is directly affected by these bearing pressures. The surrounding soil and foundation must be checked to ensure that they to react against these pressures to avoid inducing excessive strain in plate.

**Aluminum Structural Plate
Height of Cover Limits***
Combination Metal Thickness, Reinforcing Rib Type, and Rib Spacing
Pipe-Arch Shape- HS 20 Live Load

| Span (Ft.-In.) | Rise (Ft.-In.) | Area (Sq-Ft) | Minimum Height of Cover (Ft.) | | | | | |
|---------------------------------------|---------------------------------|----------------------------|-------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| | | | 1.00 | 1.50 | 2.00 | 2.50 | 3.00 | 3.50 |
| 6-7 6-11 | 5-8 5-9 | 30 32 | 0.125-II-18 (25) | 0.100 (22) | 0.100 (22) | 0.100 (22) | 0.100 (22) | 0.100 (22) |
| 7-3 7-9 8-1 | 5-11 6-0 6-1 | 34 37 39 | 0.125-IV-18 (22) | 0.150 (22) | 0.100 (19) | 0.100 (19) | 0.100 (19) | 0.100 (19) |
| 8-5 8-10 | 6-3 6-4 | 42 45 | 0.125-IV-9 (19) | 0.125-II-18 (19) | 0.100 (17) | 0.100 (17) | 0.100 (17) | 0.100 (17) |
| 9-3 9-7 9-11 | 6-5 6-6 6-8 | 47 50 53 | 0.125-IV-9 (17) | 0.125-II-18 (17) | 0.125 (17) | 0.100 (15) | 0.100 (15) | 0.100 (15) |
| 10-3 10-9 11-1 | 6-9 6-10 7-0 | 56 58 61 | 0.175-IV-9 (16) | 0.125-II-18 (16) | 0.125-II-27 (16) | 0.100 (14) | 0.100 (14) | 0.100 (14) |
| 11-5 11-9 | 7-1 7-2 | 64 68 | | 0.125-II-18 (14) | 0.125-II-27 (14) | 0.125 (14) | 0.100 (12) | 0.100 (12) |
| 12-3 12-7 12-11 13-1 13-1 | 7-3 7-5 7-6 8-2 8-4 | 71 74 77 83 87 | | 0.150-IV-18 (13) | 0.125-II-27 (13) | 0.150 (13) | 0.100 (11) | 0.100 (11) |
| 13-11 14-0 13-11 | 8-5 8-7 9-5 | 90 94 102 | | 0.125-IV-9 (12) | 0.125-IV-27 (12) | 0.125-II-27 (12) | 0.100 (11) | 0.100 (11) |
| 14-3 14-8 14-11 | 9-7 9-8 9-10 | 106 110 114 | | 0.125-IV-9 (11) | 0.125-IV-27 (11) | 0.125-II-27 (11) | 0.125 (11) | 0.125 (11) |
| 15-4 15-7 16-1 | 10-0 10-2 10-4 | 119 123 128 | | 0.150-IV-9 (11) | 0.125-IV-18 (11) | 0.125-II-27 (11) | 0.125-II-54 (11) | 0.125 (11) |
| 16-4 | 10-6 | 132 | | 0.225-IV-9 (10) | 0.150-IV-18 (10) | 0.125-II-27 (10) | 0.125-II-54 (10) | 0.125-II-54 (10) |

* Number in () below combination indicates maximum cover for the given combination plate thickness, rib type and rib spacing. All maximum cover depths are given in feet. (See Note Number 2 Under Structural Plate Notes)

MINIMUM AND MAXIMUM COVER FOR ALUMINUM STRUCTURAL PLATE



2008 FDOT Design Standards

COVER HEIGHT

| | |
|-------------------------|-----------|
| Last Revision | Sheet No. |
| 07/01/07 | 6 of 6 |
| Index No. 205 | |