



SUPERSTRUCTURE CROSS-SECTION
(BARS 6B3 NOT SHOWN)

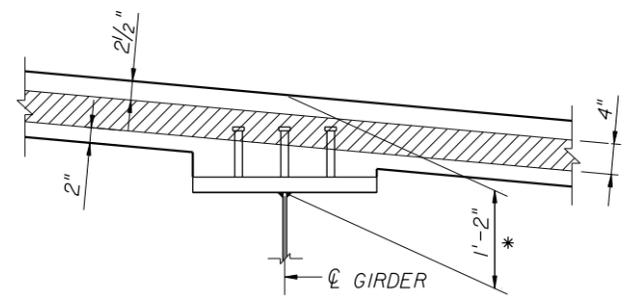


HAUNCH DETAIL

NOTES: (HAUNCH)
 A) THE SHEAR CONNECTOR STUD HEAD MUST BE LOCATED WITHIN THE CROSS HATCHED REGION.
 B) (*) DIMENSION SHOWN IS MEASURED FROM THE TOP OF THE WEB PLATE TO THE TOP OF THE SLAB AT THE CENTERLINE OF THE GIRDER. THE DIMENSION MAY BE VARIED AS REQUIRED TO PROVIDE FOR ANY VARIATION IN CAMBER FROM THAT CALCULATED (SEE SHEETS X-XX & X-XX) EXCEPT THAT NO PORTION OF THE GIRDER FLANGE MAY FALL WITHIN 8" OF THE TOP OF THE SLAB.

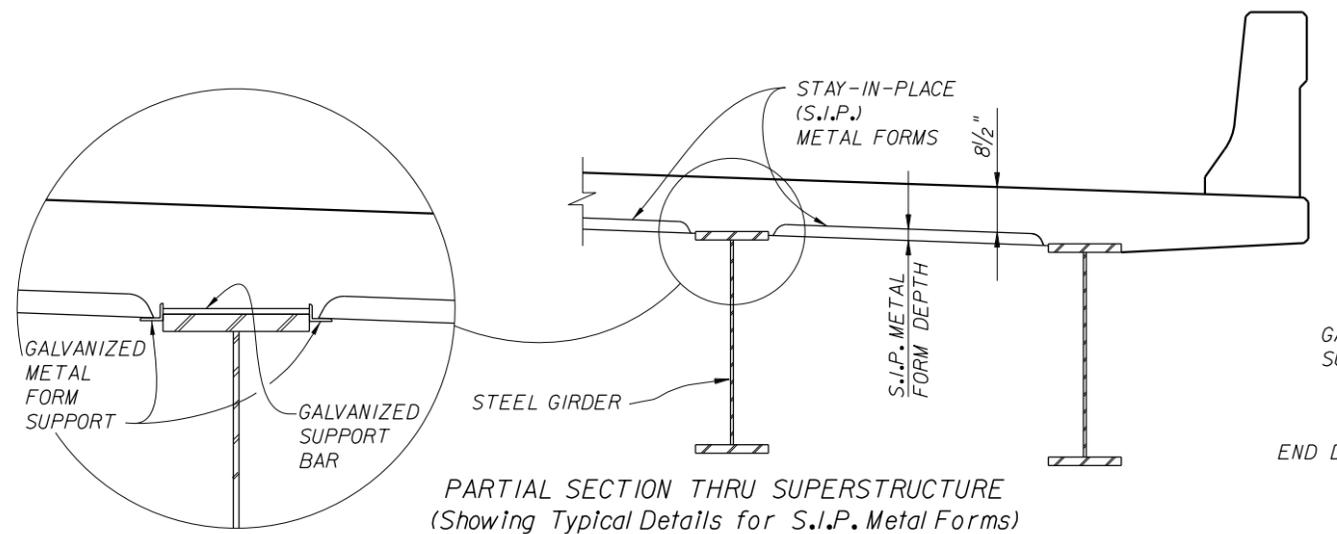

PARTIAL SECTION THRU SUPERSTRUCTURE
(Showing Typical Details for S.I.P. Metal Forms)

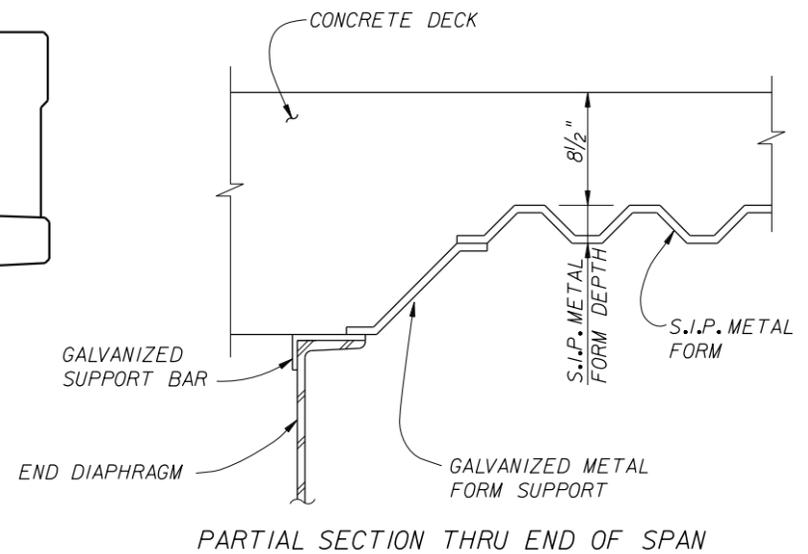

PARTIAL SECTION THRU END OF SPAN

STAY-IN-PLACE METAL FORM DETAILS

BRIDGE NO. XXXXXX

REVISIONS						STRUCTURES DESIGN OFFICE			STATE OF FLORIDA DEPARTMENT OF TRANSPORTATION			SHEET TITLE		REF. DWG. NO.
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION	CENTRAL OFFICE 605 Suwannee Street, MS 33 Tallahassee, Florida 32399-0450			ROAD NO.	COUNTY	FINANCIAL PROJECT ID	SUPERSTRUCTURE SECTION		
												SUPERSTRUCTURE DETAILS EXAMPLE 1 SUPERSTRUCTURE SECTION - STEEL I-GIRDER		SHEET NO.