



Note:  
 (⇒) Arrows indicate direction of travel  
 and not the number of lanes nor width  
 of median shoulder pavement.

HALF PLAN  
 LIMITED ACCESS FACILITIES  
 SHOULDER GROUND-IN RUMBLE STRIP PLACEMENT

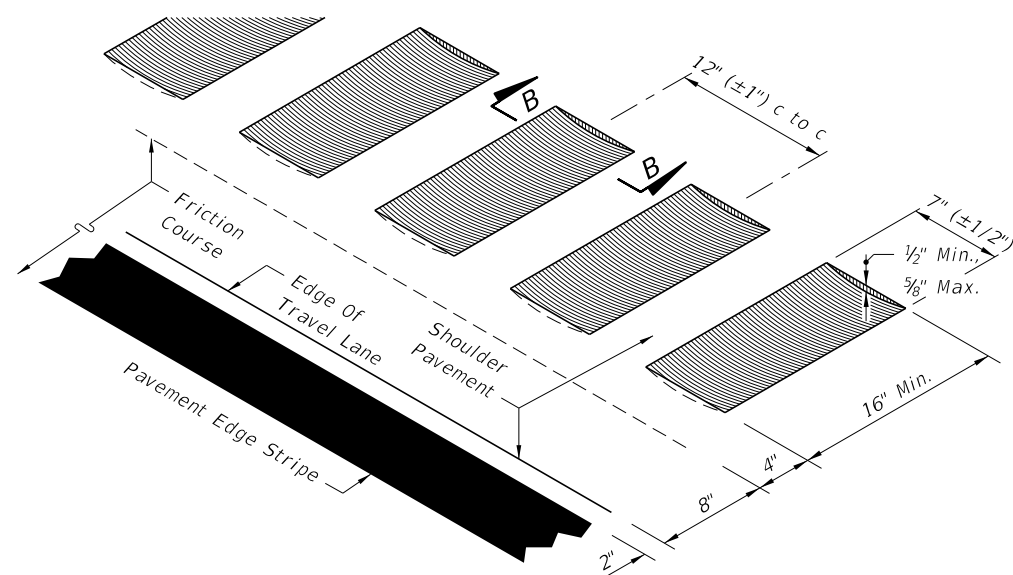


ISOMETRIC - LONGITUDINAL CUT

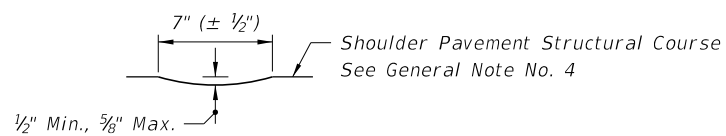

SECTION BB  
 LONGITUDINAL CUT

LOCATION ALONG SHOULDER (FLEXIBLE PAVEMENT)

SHOULDER GROUND-IN RUMBLE STRIPS

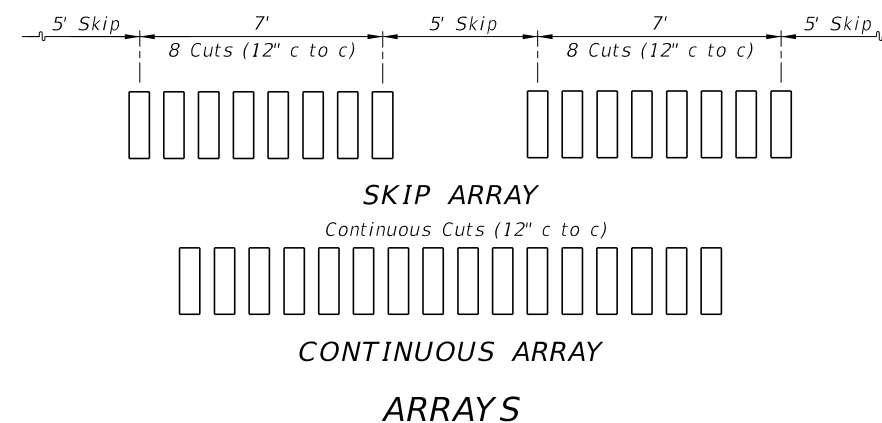


ARRAYS

GENERAL NOTES FOR  
 SHOULDER GROUND-IN RUMBLE STRIPS


1. Shoulder ground-in rumble strips shall be constructed on limited access facilities.
2. The skip array is the standard array. The continuous array shall be constructed in advance of bridge ends for a distance of 1000', or back to the gore recovery area for mainline interchange bridges; and constructed at other specific locations as called for in the plans.
3. Ground-in rumble strips are to be constructed in accordance with Section 546 of the Specifications.
4. When friction course extends more than 8" beyond the edge of the travel lane, the extended friction course shall be bladed off back to the 8" line, prior to rumble strip grinding.

10/12/2016 10:58:29 AM


LAST REVISION 07/01/14	DESCRIPTION:	FY 2017-18 DESIGN STANDARDS	SHOULDER RUMBLE STRIPS	INDEX NO. 518	SHEET NO. 1 of 2
---------------------------	--------------	--------------------------------	------------------------	------------------	---------------------

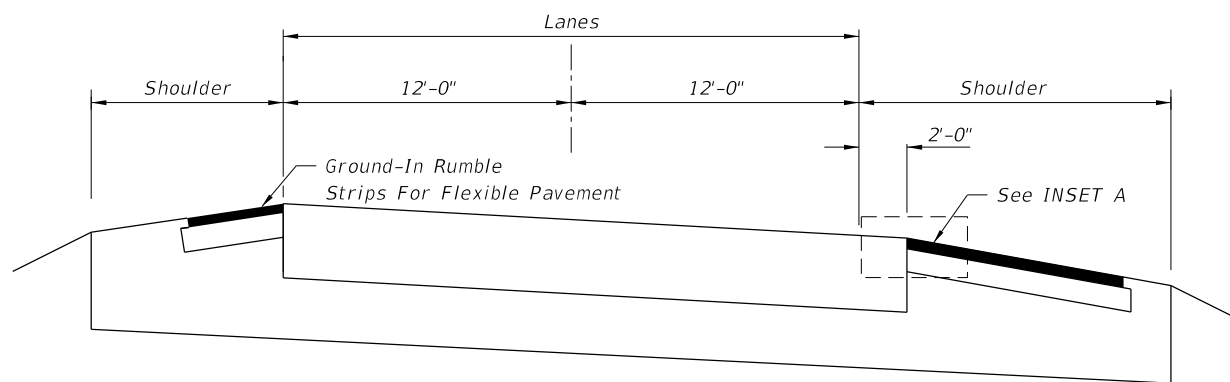


NTS  
RIGID PAVEMENT WITH FLEXIBLE PAVEMENT SHOULDER

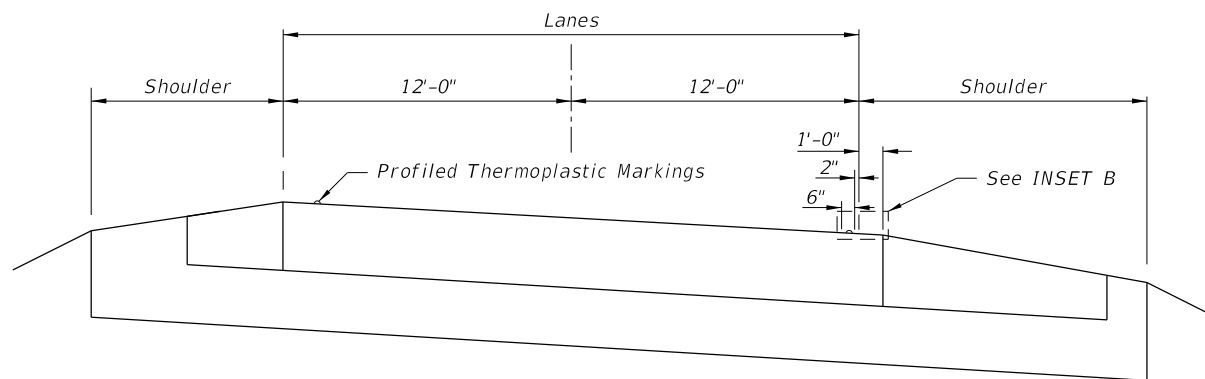

NTS  
RIGID PAVEMENT WITH RIGID PAVEMENT SHOULDER

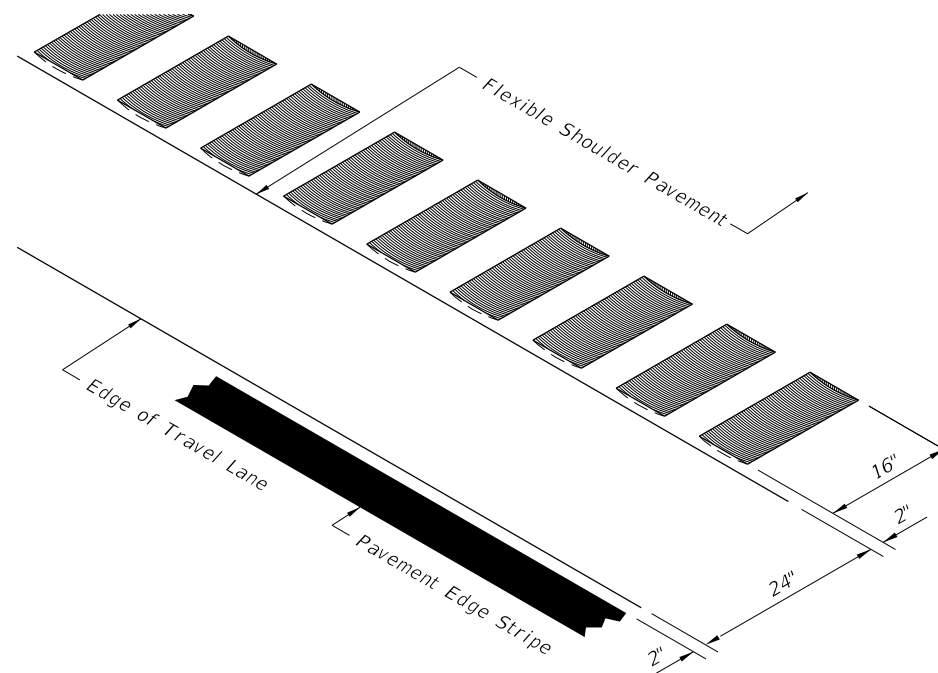

ISOMETRIC - LONGITUDINAL CUT  
INSET A

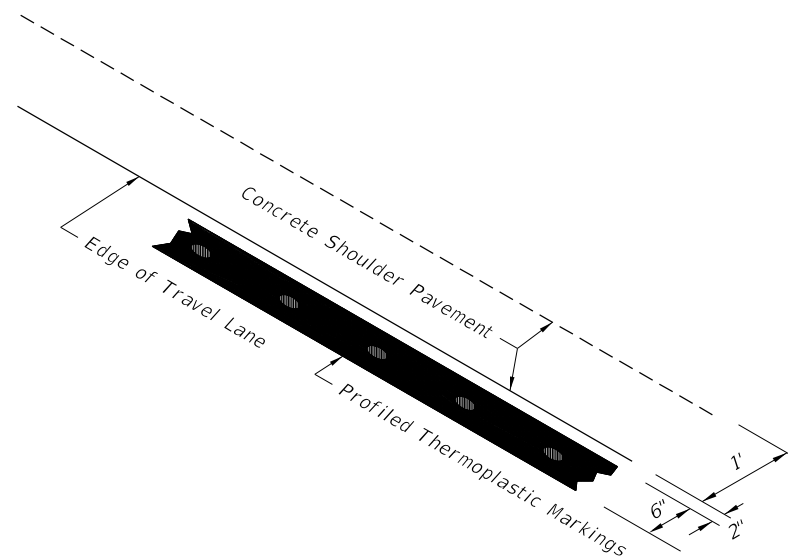

ISOMETRIC - LONGITUDINAL CUT (RIGID PAVEMENT)  
INSET B

10/12/2016 10:58:32 AM

LAST REVISION 07/01/15	DESCRIPTION:
---------------------------	--------------