



Configuring GSview in Windows 7

To stop the GSview (part of the Ghostscript tools) configuration process from running each time a new user logs into the PC:


First, run GSview as Administrator, and run through the configuration process.

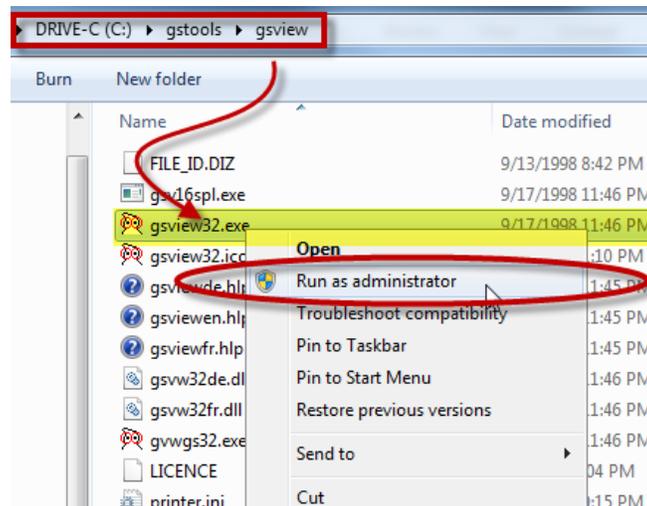


The configuration wizard appears. Select "NEXT."

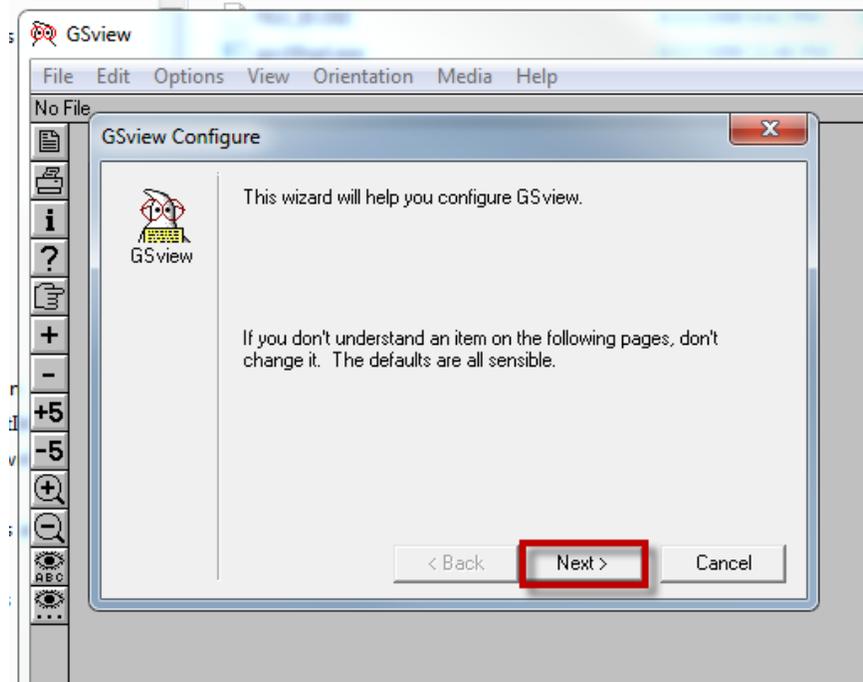


Confirm the location fields in the Configuration dialog and select “NEXT.”

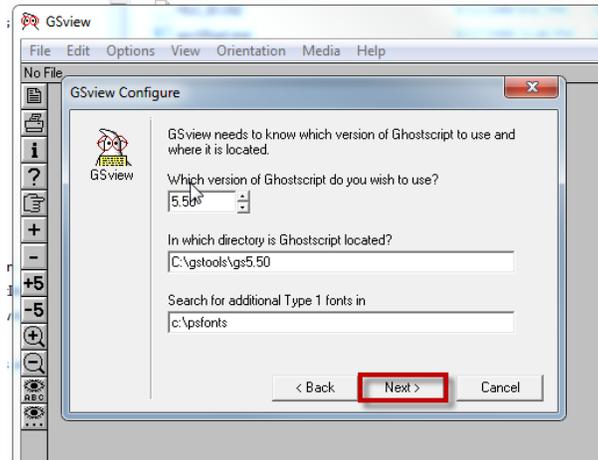


Select “NEXT” again.

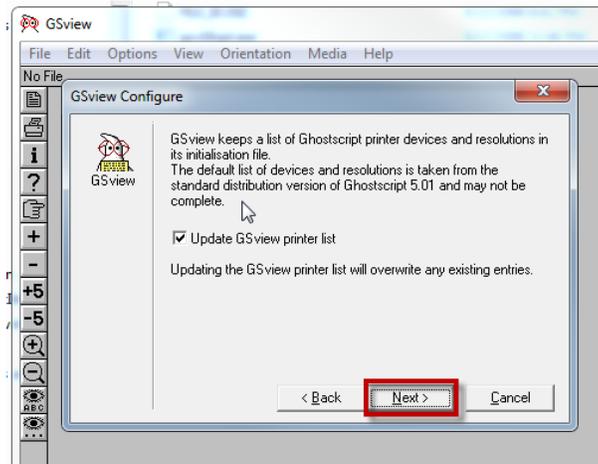


And once more.

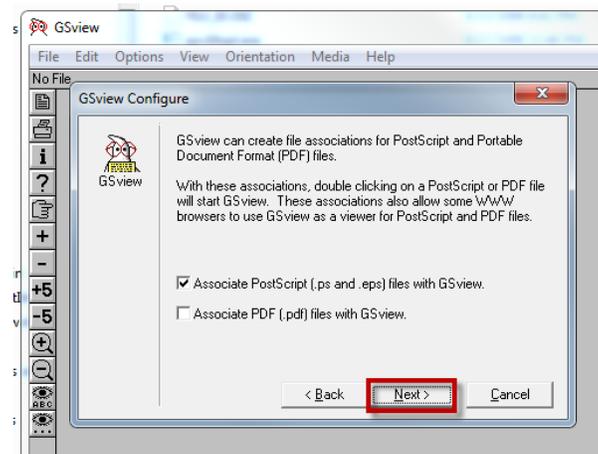


And select "NEXT" again.

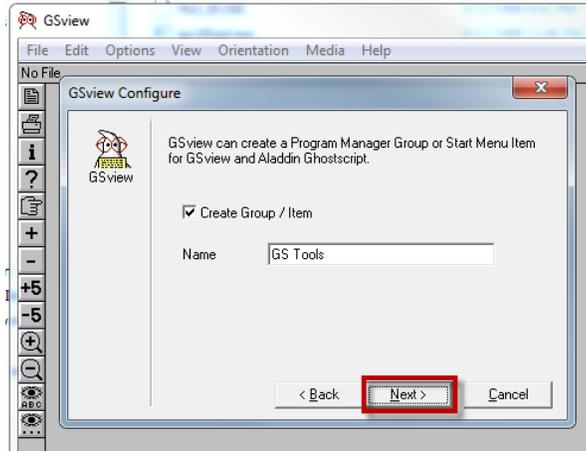


Now select "FINISH."

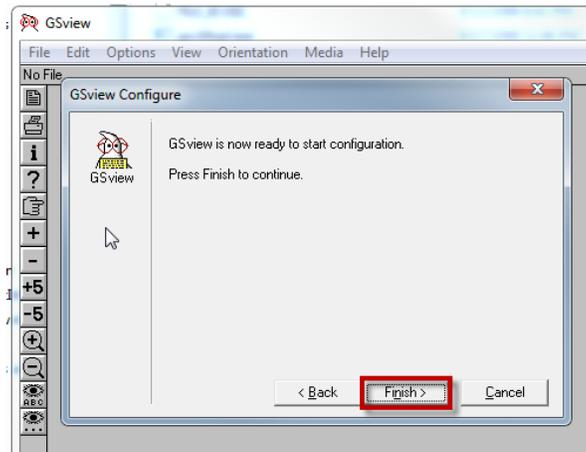


Finally, select "EXIT."

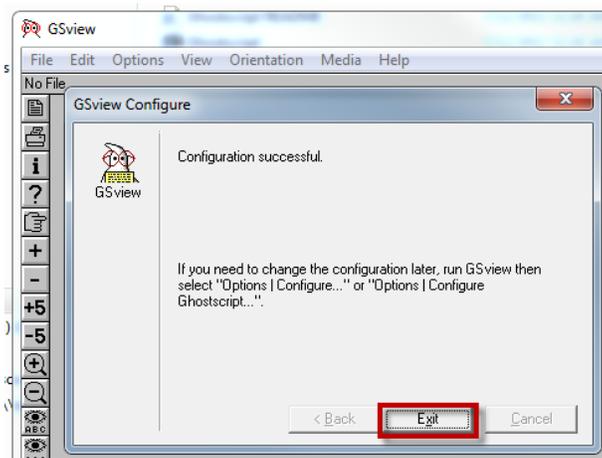

Next, locate the GSVIEW32.INI file that has been created in the current user's profile. In this case, the file is located at C:\USERS\RD964MS\GSVIEW32.INI.

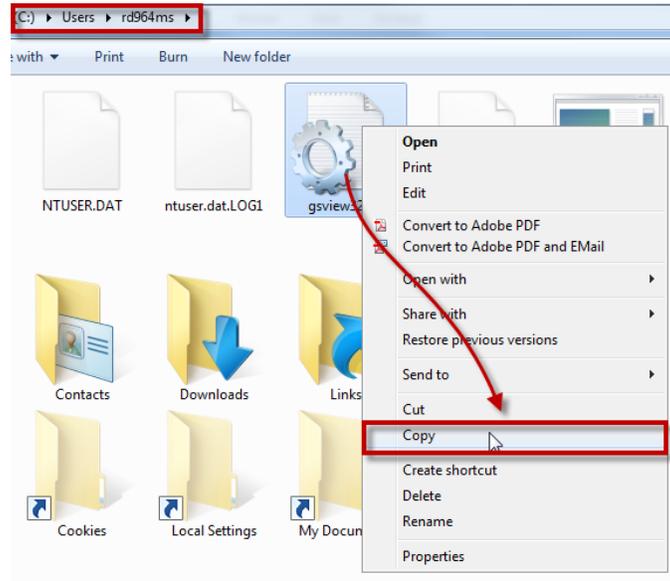

Copy GView32.INI and paste it into C:\USERS\DEFAULT folder as shown below.

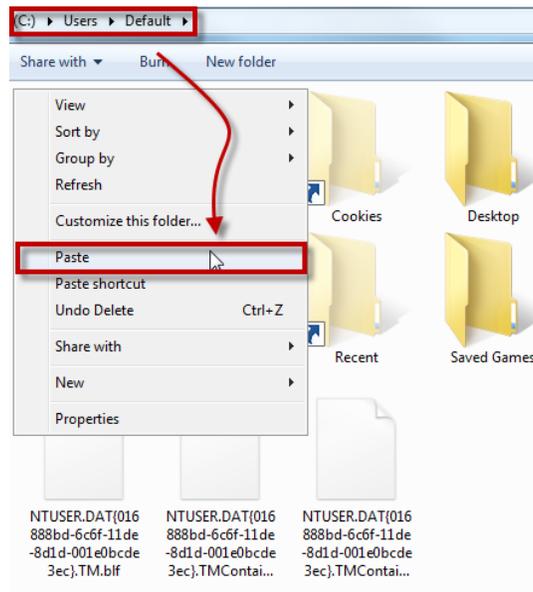

Then when a new user logs into that PC, and their profile is created, a copy of the ini file is added to that user's profile and GView doesn't need to run the configuration for that user.