
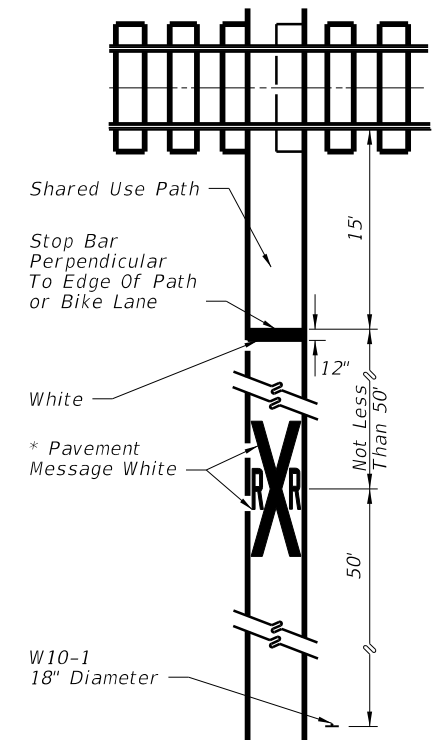
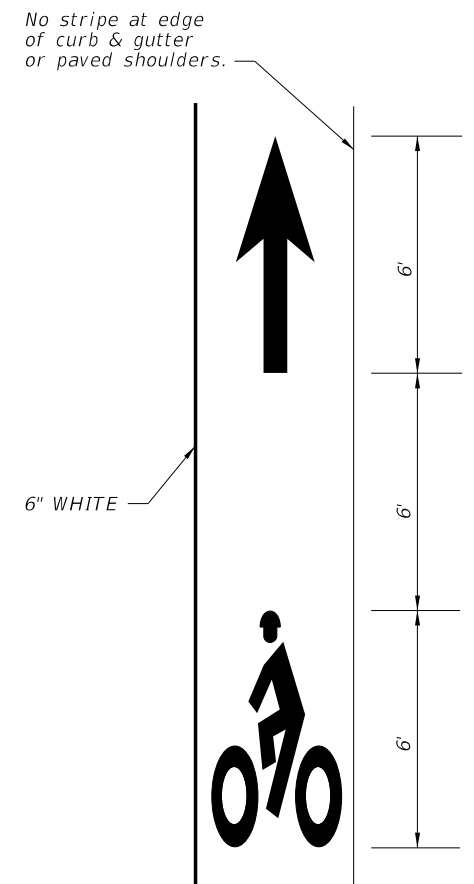
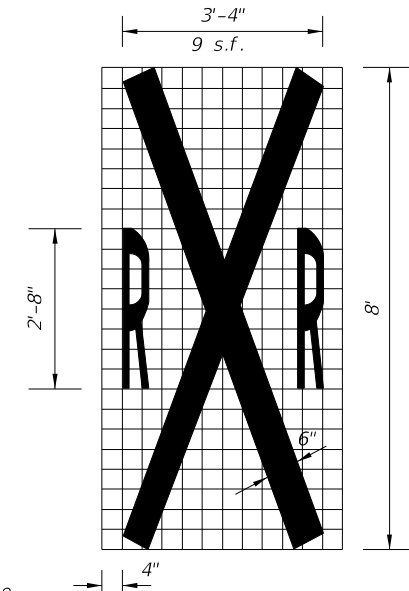
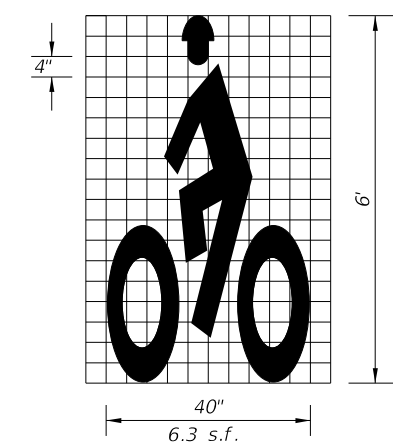
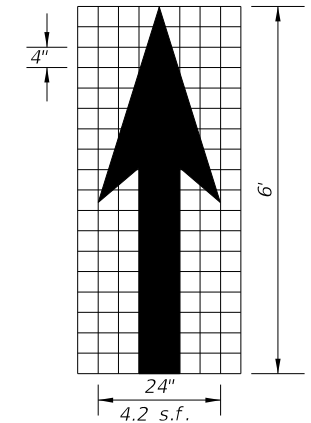
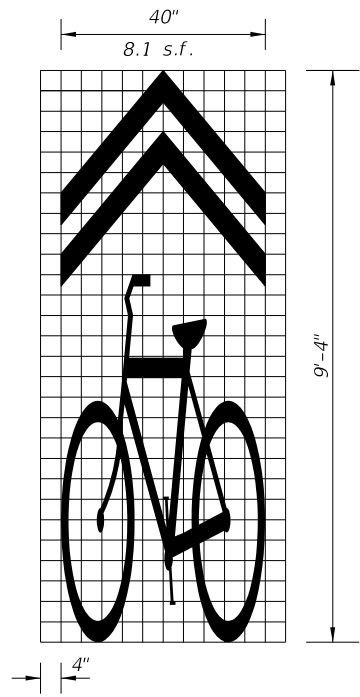
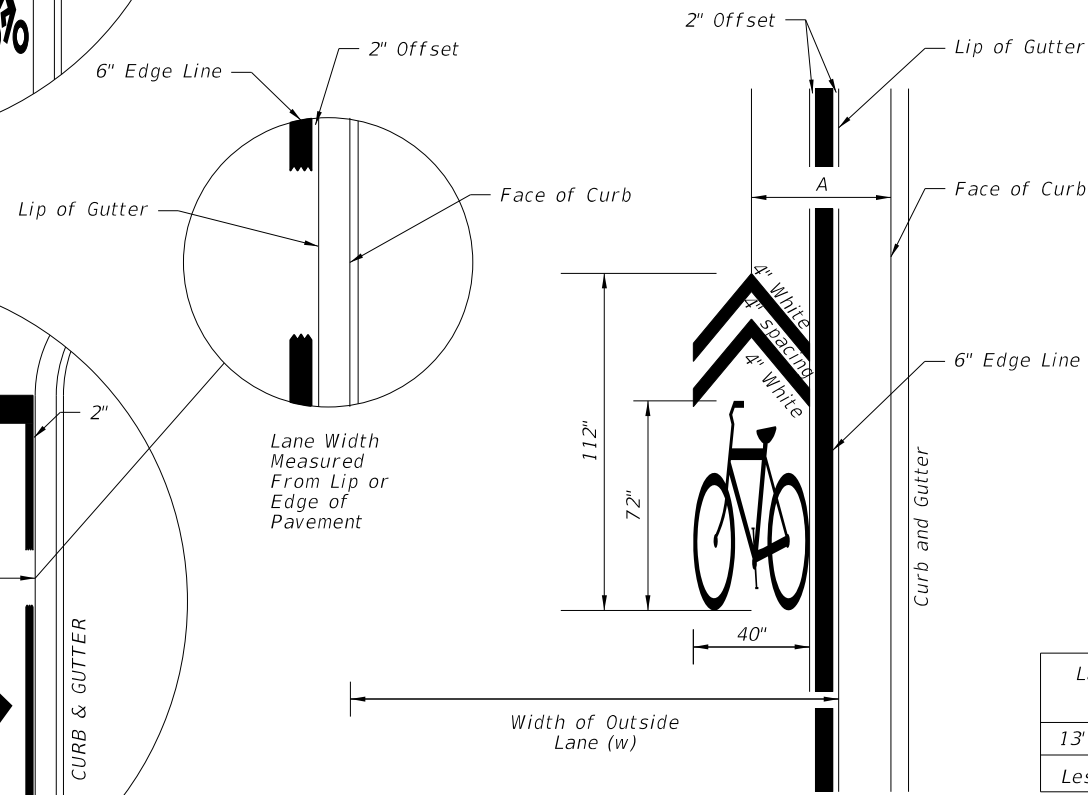
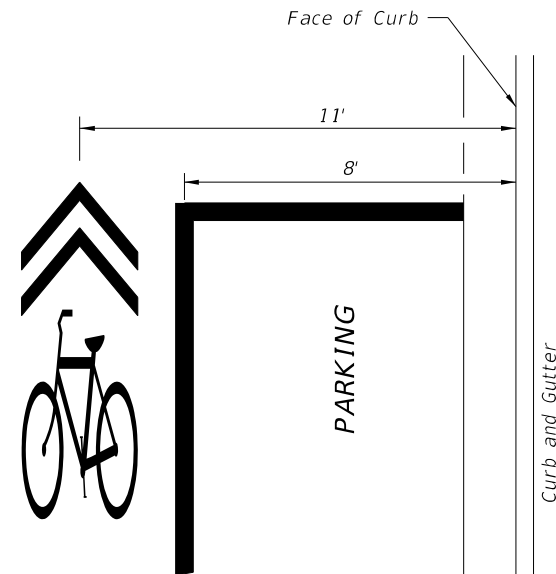
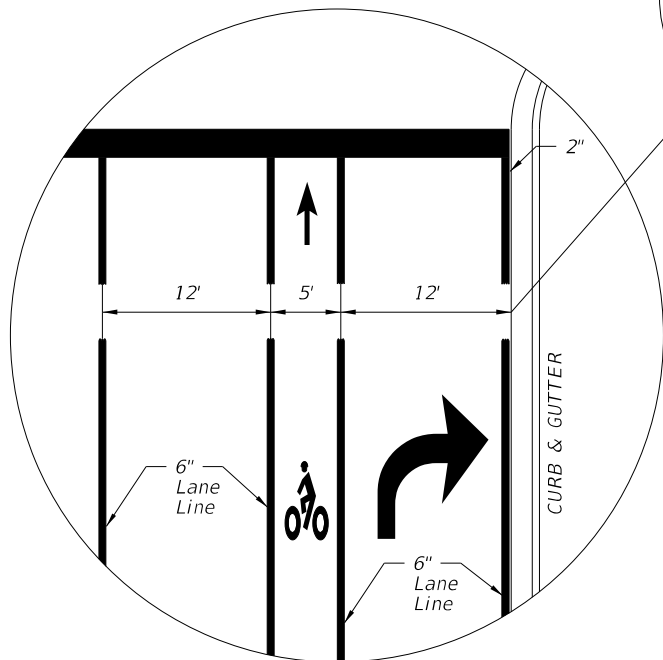


- Recommended placement of bicycle lane markings:
 - At the beginning of a bicycle lane, on the far side of major intersections, and prior to and within the bicycle lane keyhole.
 - Along the roadway as needed to provide a maximum spacing of 1,320 feet for posted speeds less than 45 mph, 2,640 feet for a posted speed of 45 mph or greater.
- Recommended spacing for shared lane marking symbols: Immediately after intersections and at a maximum spacing of 250 feet.
- All pavement markings and pavement messages shall be White.
- All bicycle pavement markings shall be preformed thermoplastic.
- Bike lane signs (R3-17, R3-17a, R3-17b) are not required.

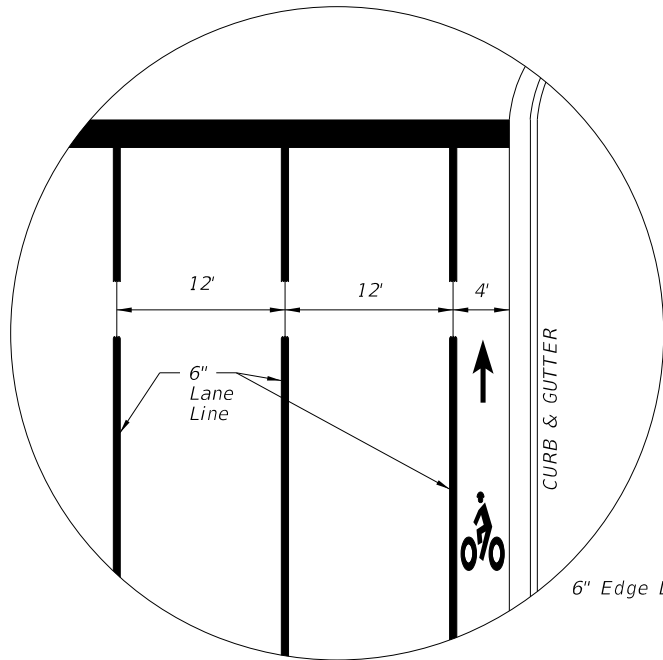


Lane Width (w)	Sharrow ζ (A)
13' or Greater	4'
Less Than 13'	5½' **

** For lane widths less than 11' in width, the symbol shall be centered in the lane.


* When used in bike lane, markings shall be placed adjacent to markings in travel lane and W10-1 sign shall be deleted.

6/27/2014 9:51:02 AM


6/27/2014 9:51:03 AM

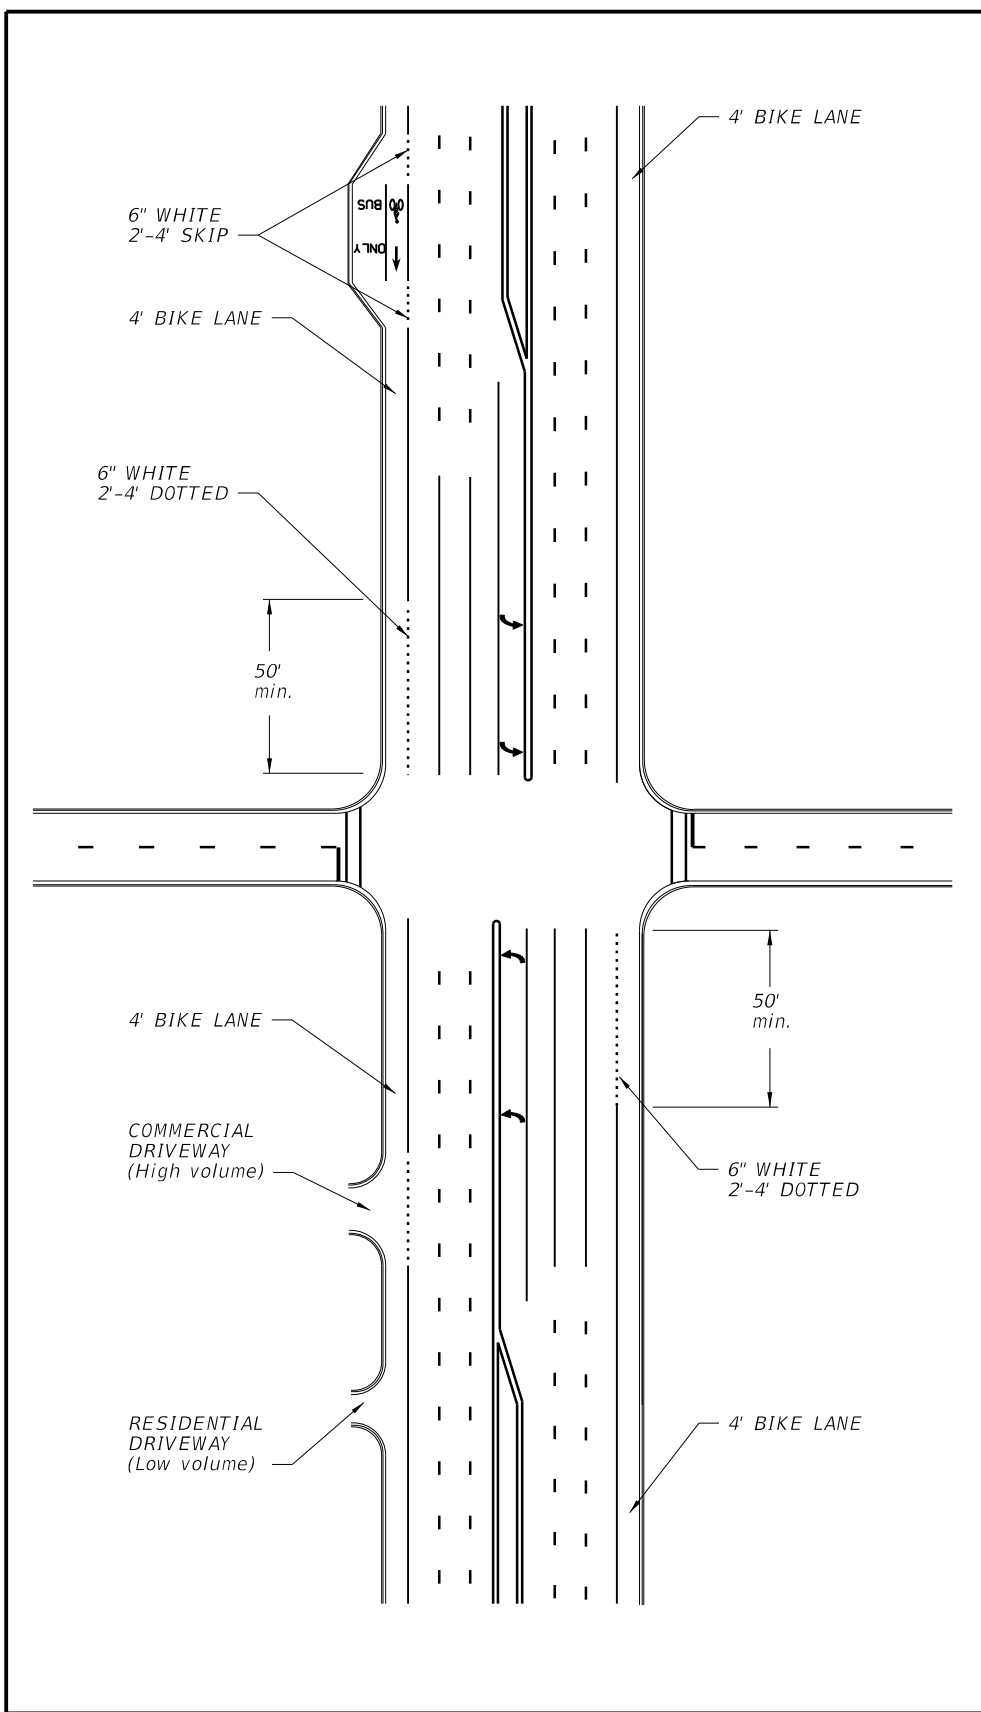

INTERSECTION WITH BUS BAY,
NO RIGHT TURN LANE, CURB
AND GUTTER TYPICAL SECTION

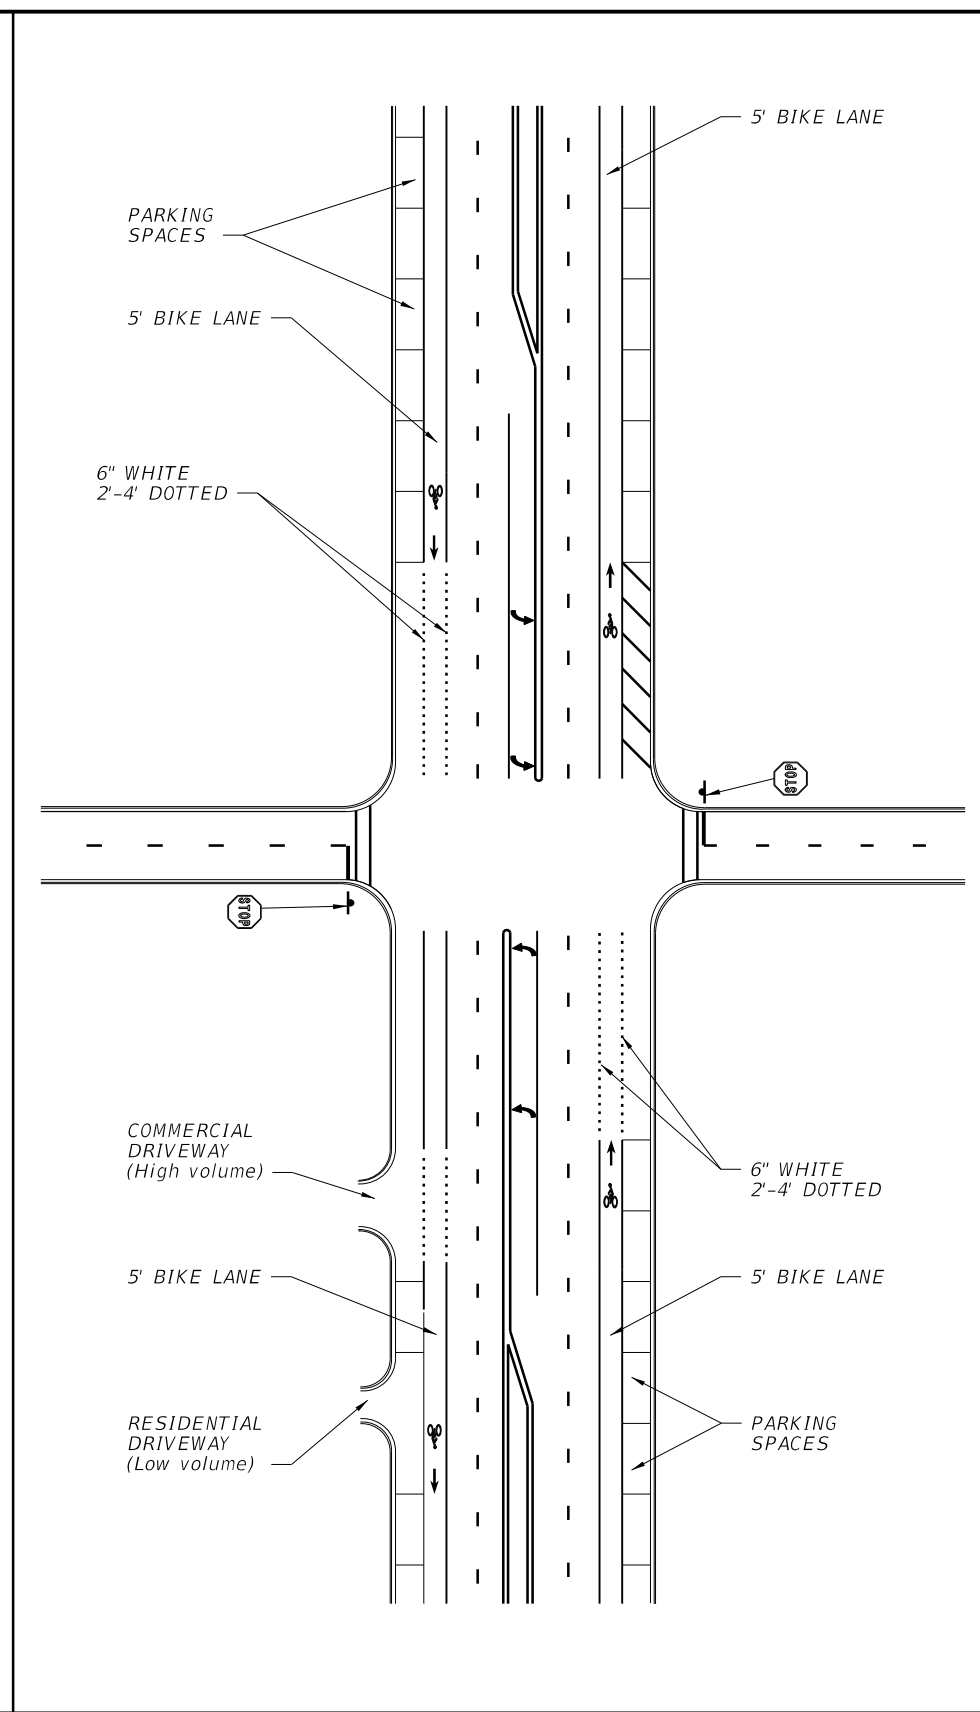


INTERSECTION WITH ON STREET
PARKING, NO RIGHT TURN LANE,
CURB AND GUTTER TYPICAL SECTION

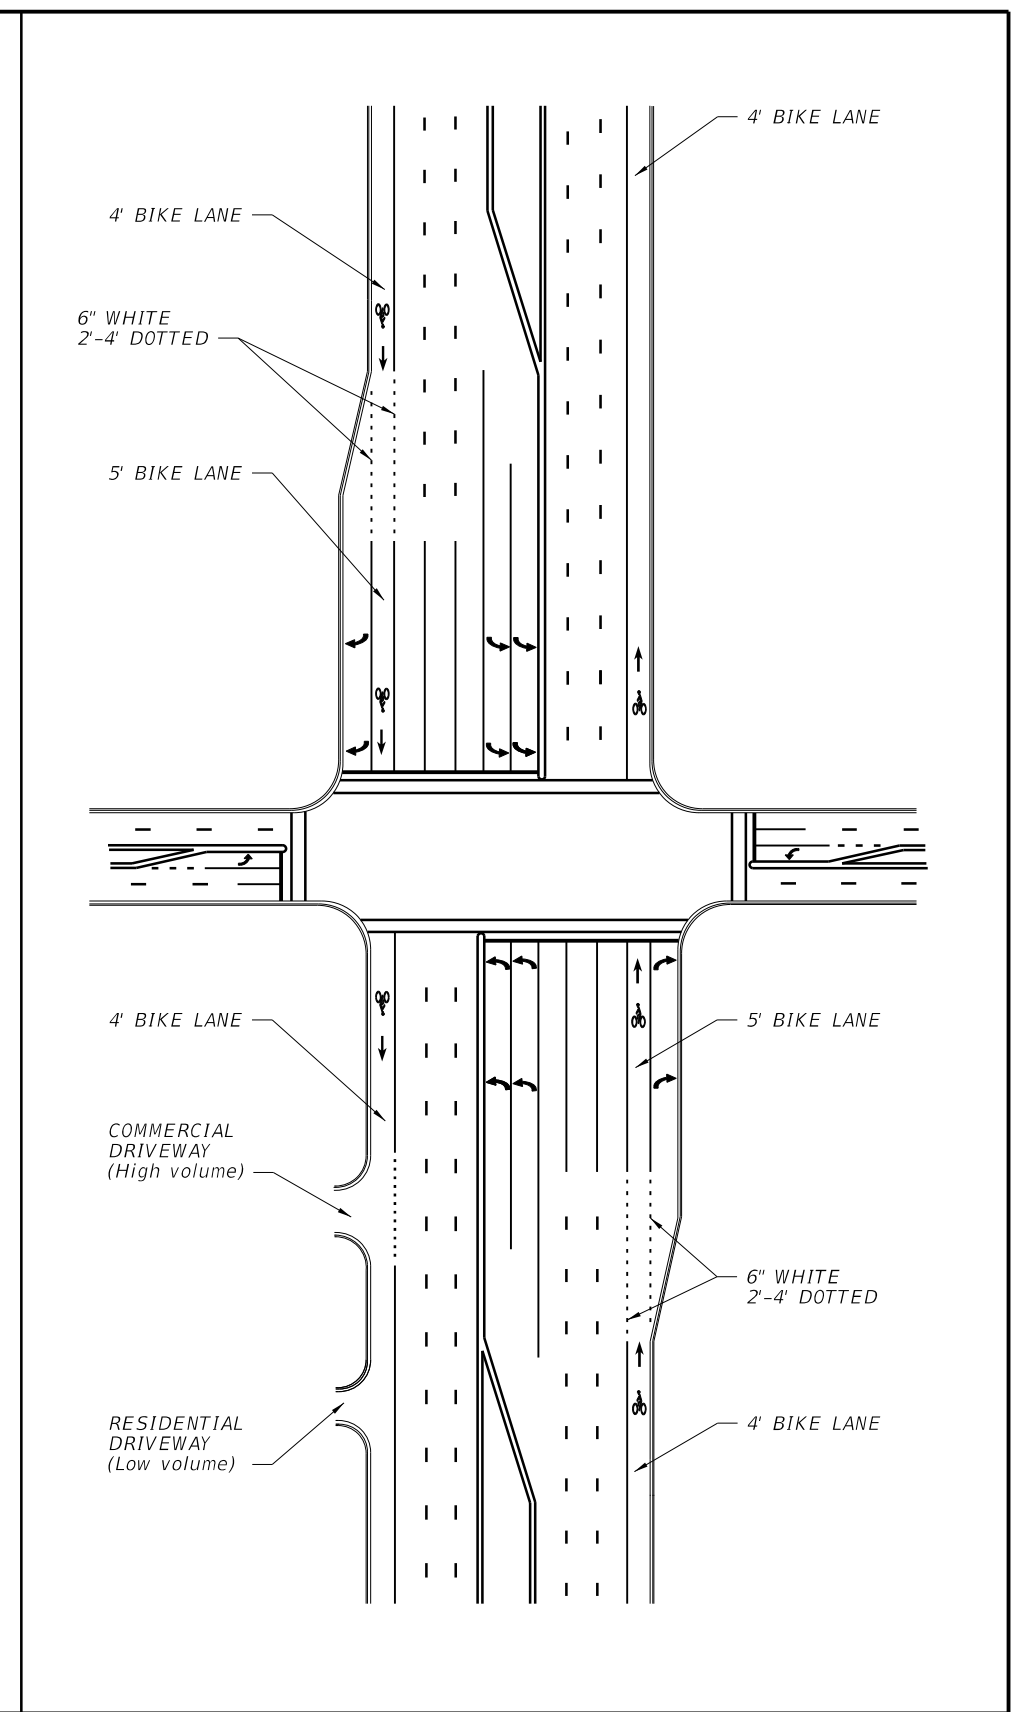


INTERSECTION WITH SEPARATE
RIGHT TURN LANE, CURB AND
GUTTER TYPICAL SECTION


LAST REVISION 07/01/12	DESCRIPTION:	 2015 DESIGN STANDARDS	BICYCLE MARKINGS	INDEX NO. 17347	SHEET NO. 2 of 4

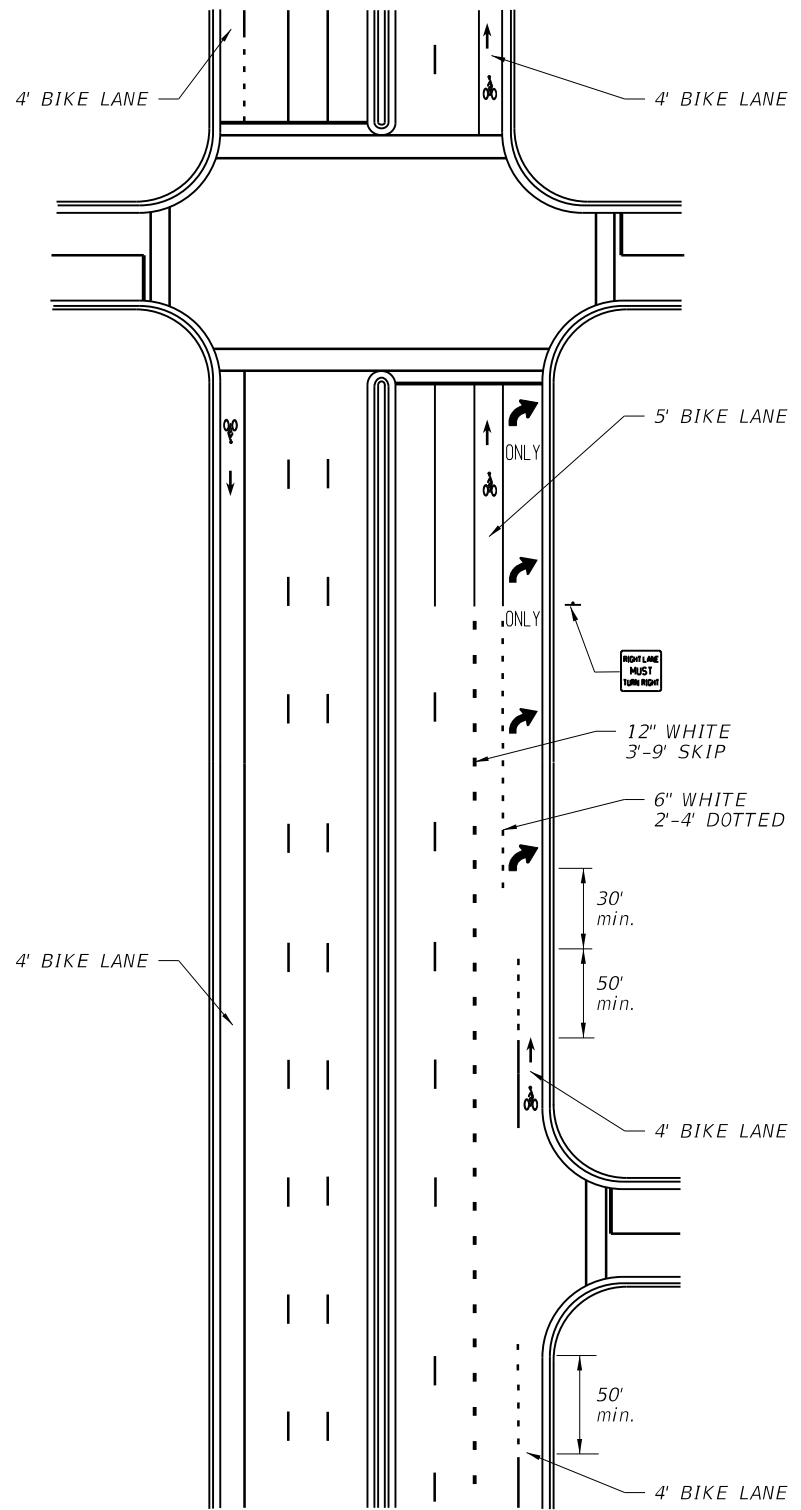

INTERSECTION WITH RIGHT TURN DROP LANE, CURB AND GUTTER TYPICAL SECTION

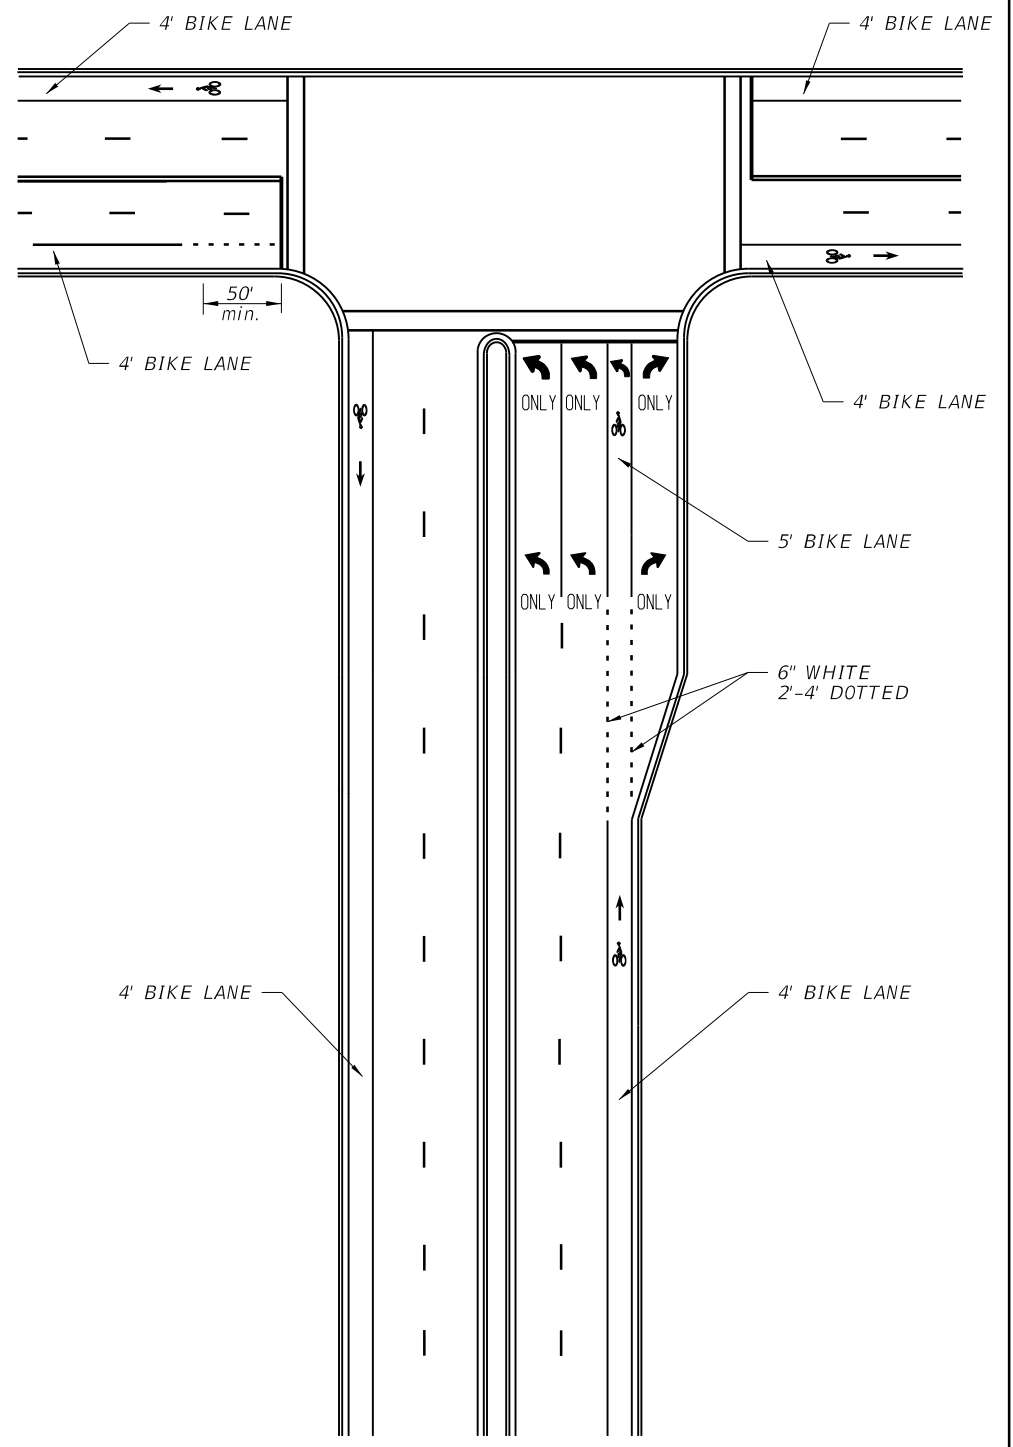


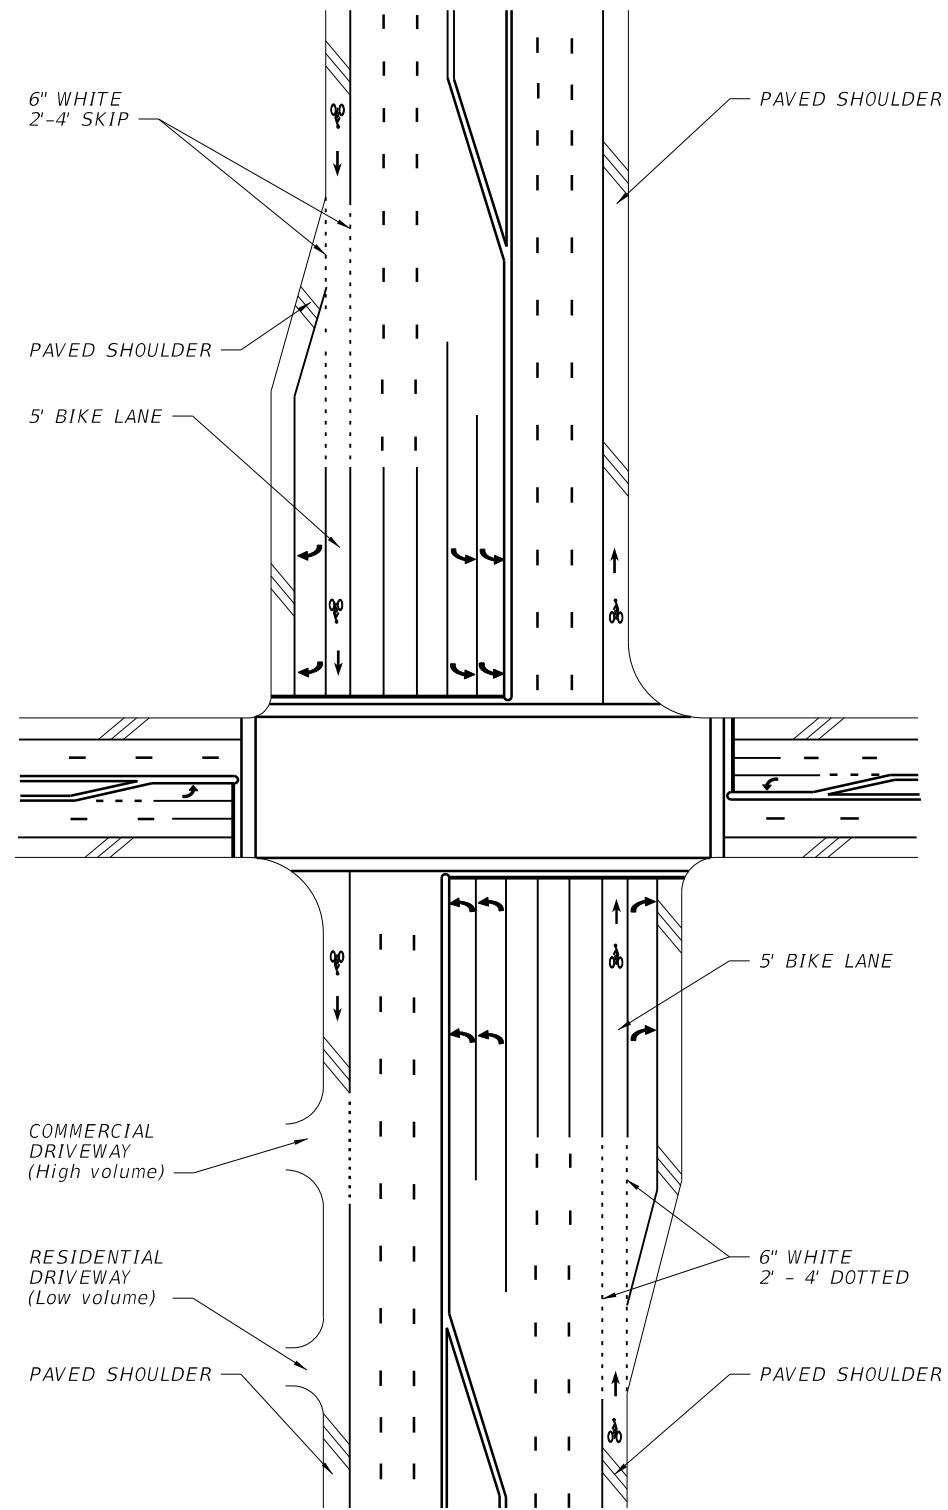
"TEE" INTERSECTION WITH SEPARATE RIGHT TURN LANE, CURB & GUTTER TYPICAL SECTION

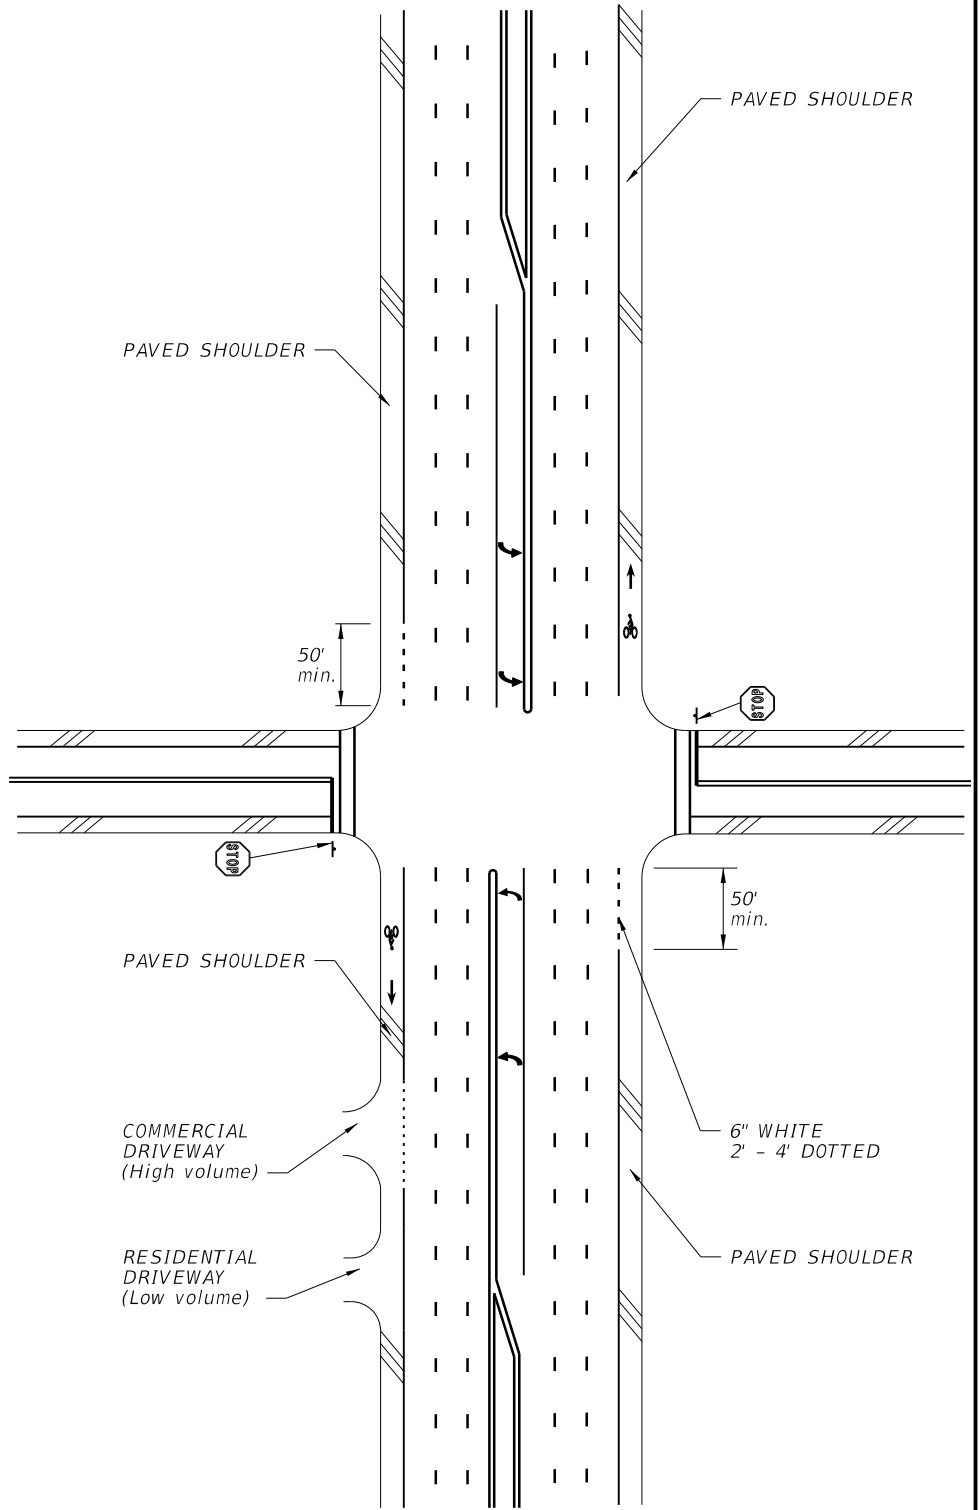

INTERSECTION, NO RIGHT TURN LANE, FLUSH SHOULDER TYPICAL SECTION


6/27/2014 9:51:03 AM

LAST REVISION 07/01/12	REVISION	DESCRIPTION:	 2015 DESIGN STANDARDS	BICYCLE MARKINGS	INDEX NO. 17347	SHEET NO. 3 of 4
---------------------------	----------	--------------	---	-------------------------	---------------------------	----------------------------



INTERSECTION WITH SEPARATE RIGHT TURN LANE, FLUSH SHOULDER TYPICAL SECTION

6/27/2014 9:51:04 AM

LAST REVISION 07/01/13	REVISION DESCRIPTION:	 2015 DESIGN STANDARDS	BICYCLE MARKINGS	INDEX NO. 17347	SHEET NO. 4 of 4
---------------------------	-----------------------	--	------------------	--------------------	---------------------